

Article No. : 6SL3521-1XK01-1AF0



Figure similar

Client order no. :
Order no. :
Offer no. :
Remarks :

Item no. :
Consignment no. :
Project :

Rated data

Input	
Number of phases	3 AC
Line voltage	380 ... 480 V +10 % -10 %
Line frequency	45 ... 66 Hz
Rated current	2.69 A
Output	
Number of phases	3 AC
Rated voltage	400 V
Rated power IEC 400V (HO)	1.10 kW
Rated power NEC 480V (HO)	1.50 hp
Rated current (HO)	3.10 A
Max. output current	6.20 A
Pulse frequency	4 kHz
Output frequency for vector control	0 ... 240 Hz
Output frequency for V/f control	0 ... 550 Hz

Overload capability

High Overload (HO)
200% × base load current IH for 3 s, followed by 150% for 57 s within a cycle time of 300s

Inputs / outputs

Standard digital inputs

Number ¹⁾	4
Switching level: 0 → 1	11 V
Switching level: 1 → 0	5 V
Max. inrush current	15 mA

Fail-safe digital inputs

Number	1
--------	---

Digital inputs / outputs parameterizable

Number	2
--------	---

PTC/ KTY interface

1 motor temperature sensor input, possible sensor PTC, KTY, PT1000, thermo click, accuracy ±5 °C

General tech. specifications

Power factor λ	0.00 ... 0.87
Offset factor cos φ	0.99
Efficiency η	0.97
Power loss	0.054 kW
Filter class (integrated)	RFI suppression filter for Category C2
Brake voltage	400V AC
Integrated braking resistor (continuous braking power P_DB / peak power P_max)	10W / 100W

Ambient conditions

Cooling	Natural convection cooling
Installation altitude	1,000 m (3,280.84 ft)
Ambient temperature	
Operation	-30 ... 55 °C (-22 ... 131 °F)
Transport	-40 ... 70 °C (-40 ... 158 °F)
Storage	-40 ... 70 °C (-40 ... 158 °F)

Relative humidity

Max. operation	95 % At 40 °C (104 °F), condensation and icing not permissible
----------------	----------------------------------------------------------------

Mechanical data

Degree of protection	IP65/66 / UL type 4X
Frame size	F5A
Net weight	6.5 kg (14.30 lb)
Dimensions	
Width	380 mm (14.96 in)
Height	216 mm (8.50 in)
Depth	129 mm (5.08 in)

Closed-loop control techniques

V/f linear / square-law / parameterizable	Yes
V/f with flux current control (FCC)	Yes
V/f ECO linear / square-law	Yes
Sensorless vector control	Yes
Vector control, with sensor	No
Encoderless torque control	Yes
Torque control, with encoder	No

Communication

Communication	PROFINET, EtherNet/IP
Version	M12

Control option

Control option	Repair switch
----------------	---------------

Data sheet for SINAMICS G115D

Article No. : 6SL3521-1XK01-1AF0

Connections

Connection type

Version Connector without daisy chain

3AC 400V supply

Version 1x Q4/2

24 V DC power supply

Variants integrated

Version integrated

Digital I/O

Version M12

Motor

Version Q8/0

External brake resistor

Version Cable gland (Standard)

PE connection

Version On housing with M5 screw

Max. motor cable length

Shielded 15 m (49.21 ft)

Standards

Compliance with standards UL, cUL, CE, C-Tick (RCM), EAC, KCC, SEMI F47, REACH


CE marking EMC Directive 2014/30/EC, Low-Voltage Directive 2014/35/EC

¹⁾4 inputs PNP, not isolated, additional 2x switchable DI/DO

Converter losses to IEC61800-9-2*

Efficiency class IE2

Comparison with the reference converter (90% / 100%) 28.50 %

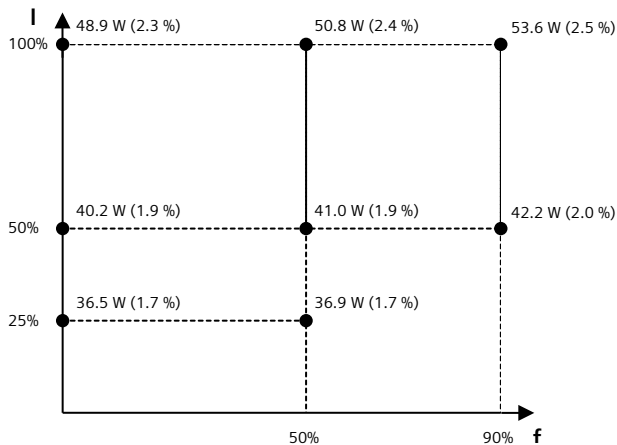

The percentage values show the losses in relation to the rated apparent power of the converter.

The diagram shows the losses for the points (as per standard IEC61800-9-2) of the relative torque generating current (I) over the relative motor stator frequency (f). The values are valid for the basic version of the converter without options/components.

*calculated values