

SOL-SC-2ST-0-DC-12MPPT-1001SE - String combiner box (SCB)



1251937

<https://www.phoenixcontact.com/in/products/1251937>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



String combiner box for photovoltaic systems up to 1000 V DC for connecting 12x 2 strings. With surge protection (type 1/2) and SUNCLIX DC connector for the input and output side.

Product description

The Solarline string combiner boxes (SCBs) are used in both small rooftop systems and large ground-mounted systems. The main tasks of the SCBs are the surge protection of the photovoltaic system, collecting strings (if necessary), and looping through the protective equipotential bonding conductor for the local equipotential bonding.

Further functions are optional and depend on the equipment.

Examples of optional functions include protecting the strings with string fuses and disconnecting the strings via DC switch disconnectors or DC fire department switches.

You can determine the full scope of functions of the SCB from its item designation (see the application note for the type key of the SCB, which can be downloaded in the "Downloads" area).

Your advantages

- Fast installation and startup
- Standard-compliant switchgear and controlgear assembly, thanks to use of DIN EN 61439
- Application-oriented consultation
- Large portfolio of string combiner boxes in stock

Commercial data

Item number	1251937
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	*****
Product key	DTHTDA
GTIN	4063151359188
Weight per piece (including packing)	17.5 kg
Weight per piece (excluding packing)	16.5 kg
Customs tariff number	85371098
Country of origin	DE

SOL-SC-2ST-0-DC-12MPPT-1001SE - String combiner box (SCB)



1251937

<https://www.phoenixcontact.com/in/products/1251937>

Technical data

Product properties

Product type	String combiner box (SCB)
Scope of delivery	SUNCLIX DC connector for connecting the SCB

Insulation characteristics

Protection class	II
------------------	----

Electrical properties

General

MPP voltage U_n	max. 1000 V DC
Non-load voltage U_{OC}	max. 1100 V DC
Current per string I_{max}	max. 20 A
Total current MPP tracker	max. 40 A

Surge protection

EN type	T1
IEC test classification	T1
Protection level U_p	≤ 3.5 kV
Total discharge current I_{total} (10/350) μs	5 kA
Total discharge current I_{total} (8/20) μs	40 kA
Short-circuit current rating I_{SCPV}	40 A

Input data

DC

Number of inputs: Strings	2 (Per MPP tracker)
Number of supported MPP trackers	12

Output data

DC

Number of outputs: MPP tracker	12
Number of outputs: $\pm$	1 (Per MPP tracker)

Connection data

DC input

Type of cable entry	SUNCLIX
Cable cross-section range:	2.5 mm ² ... 6 mm ²

Protective bonding and protective grounding conductor

Type of cable entry	Cable gland
Connection method	Screw connection

SOL-SC-2ST-0-DC-12MPPT-1001SE - String combiner box (SCB)



1251937

<https://www.phoenixcontact.com/in/products/1251937>

Cable cross-section range:	2x 16 mm ²
External cable diameter	6 mm ... 13 mm

DC output

Type of cable entry	SUNCLIX
Cable cross-section range:	2.5 mm ² ... 6 mm ²

Dimensions

Housing

Width	600 mm
Height	400 mm
Depth	230 mm

Material specifications

Material Housing	Polyester fiberglass reinforced
Material Cover/door	Polyester fiberglass reinforced

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP65
Ambient temperature (operation)	-20 °C ... 55 °C

SOL-SC-2ST-0-DC-12MPPT-1001SE - String combiner box (SCB)




1251937


<https://www.phoenixcontact.com/in/products/1251937>

Drawings

Connection diagram

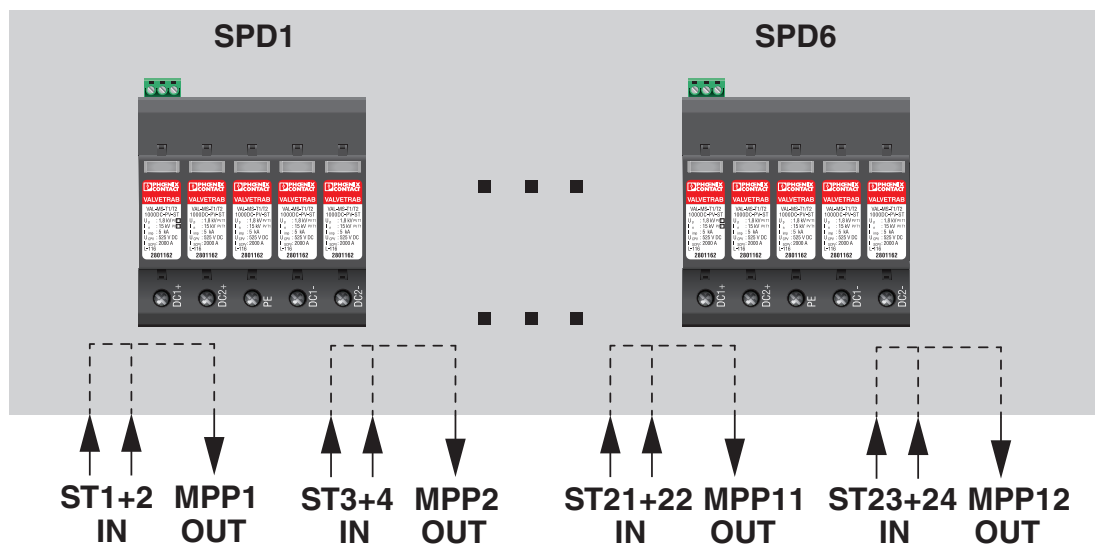


Schematic application drawing

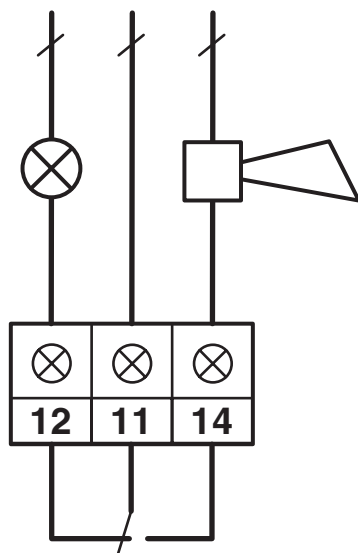

Connection of the remote indication contact on the surge protection

Schematic diagram

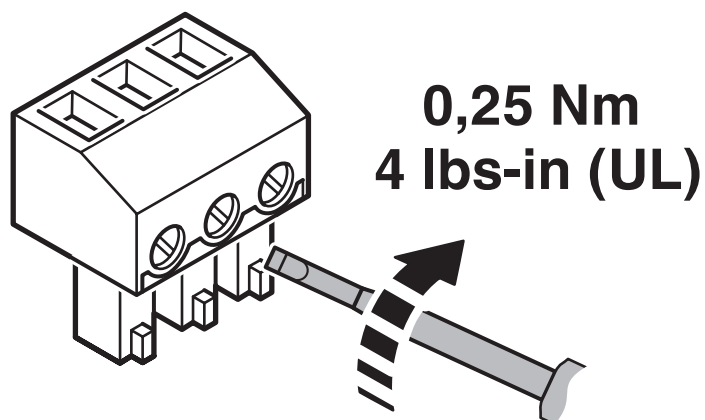

SOL-SC-2ST-0-DC-12MPPT-1001SE - String combiner box (SCB)



1251937
<https://www.phoenixcontact.com/in/products/1251937>

Classifications

ECLASS

ECLASS-11.0	27142422
ECLASS-13.0	27171490

ETIM

ETIM 9.0	EC003857
----------	----------

UNSPSC

UNSPSC 21.0	39121100
-------------	----------

SOL-SC-2ST-0-DC-12MPPT-1001SE - String combiner box (SCB)



1251937
<https://www.phoenixcontact.com/in/products/1251937>

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

SOL-SC-2ST-0-DC-12MPPT-1001SE - String combiner box (SCB)



1251937

<https://www.phoenixcontact.com/in/products/1251937>

Accessories

VAL-MS-T1/T2 1000DC-PV-ST - Type 1/2 surge protection plug

2801162

<https://www.phoenixcontact.com/in/products/2801162>



Replacement plug for PV arrester combinations from the VAL-MS-T1/T2 1000DC-PV-... product range

TOOL-KIT SOLAR - Tool set

1212071

<https://www.phoenixcontact.com/in/products/1212071>



Tool case, equipped with: crimping pliers, pressing dies for MC3, MC4 and SOLARLOK connectors, stripping tool for commercially available solar cables, stripping tool for SUNCLIX, VDE cable cutter, VDE screwdriver: PH1, PH2, 0.6x3.5 and 0.8x4.0 slots.

SOL-SC-2ST-0-DC-12MPPT-1001SE - String combiner box (SCB)



1251937

<https://www.phoenixcontact.com/in/products/1251937>

PV-ED6/Y-120(2+/1-) - Photovoltaic Y-distributor

1030649

<https://www.phoenixcontact.com/in/products/1030649>

Photovoltaic Y-distributor, Range of articles: SUNCLIX, color: black



PV-ED6/Y-120(1+/2-) - Photovoltaic Y-distributor

1030650

<https://www.phoenixcontact.com/in/products/1030650>

Photovoltaic Y-distributor, Range of articles: SUNCLIX, color: black



SOL-SC-2ST-0-DC-12MPPT-1001SE - String combiner box (SCB)



1251937

<https://www.phoenixcontact.com/in/products/1251937>

PV-C3F-S 2,5-6 (+) - Photovoltaic connector

1386381

<https://www.phoenixcontact.com/in/products/1386381>



Photovoltaic connector, Range of articles: SUNCLIX, color: black, number of positions: 1, min. conductor cross section: 2.5 mm², max. conductor cross section: 6 mm², rated voltage: 1100 V DC, rated current: 35 A, Connection method: Spring-cage, Contact connection type: Socket, min. cable diameter: 5.5 mm, max. cable diameter: 8 mm, Follow-up item to 1774674

PV-C3M-S 2,5-6 (-) - Photovoltaic connector

1386384

<https://www.phoenixcontact.com/in/products/1386384>



Photovoltaic connector, Range of articles: SUNCLIX, color: black, number of positions: 1, min. conductor cross section: 2.5 mm², max. conductor cross section: 6 mm², rated voltage: 1100 V DC, rated current: 35 A, Connection method: Spring-cage, Contact connection type: Pin, min. cable diameter: 5.5 mm, max. cable diameter: 8 mm, Follow-up item to 1774687

SOL-SC-2ST-0-DC-12MPPT-1001SE - String combiner box (SCB)



1251937

<https://www.phoenixcontact.com/in/products/1251937>

PV-C4M-S 6-16 (-) - Connector

1284632

<https://www.phoenixcontact.com/in/products/1284632>



Connector, Range of articles: SUNCLIX, color: black, number of positions: 1, min. conductor cross section: 6 mm², max. conductor cross section: 16 mm², rated voltage: 1500 V DC, rated current: 60 A, Connection method: Spring-cage, Contact connection type: Pin, min. cable diameter: 5.5 mm, max. cable diameter: 10 mm

PV-C4F-S 6-16 (+) - Connector

1284634

<https://www.phoenixcontact.com/in/products/1284634>



Connector, Range of articles: SUNCLIX, color: black, number of positions: 1, min. conductor cross section: 6 mm², max. conductor cross section: 16 mm², rated voltage: 1500 V DC, rated current: 60 A, Connection method: Spring-cage, Contact connection type: Socket, min. cable diameter: 5.5 mm, max. cable diameter: 10 mm

SOL-SC-2ST-0-DC-12MPPT-1001SE - String combiner box (SCB)



1251937

<https://www.phoenixcontact.com/in/products/1251937>

PV-AS-MC4/6-150-MN-SET1 - Photovoltaic adapter set

1079531

<https://www.phoenixcontact.com/in/products/1079531>



Photovoltaic adapter set, Range of articles: SUNCLIX, design: Adapter, color: black, rated current: 35 A, cable length: 150, Connect these connectors only to other connectors of the same type made by the same manufacturer. When making the connections, always observe the specifications regarding nominal voltage and nominal current. The smallest common value is permissible.

Phoenix Contact 2025 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT (I) Pvt. Ltd.
A-58/2, Okhla Industrial Area, Phase - II, New Delhi-110 020

+91.1275.71420
info@phoenixcontact.co.in