


# Essentials

Data sheet

## LED Lamp G60

UK

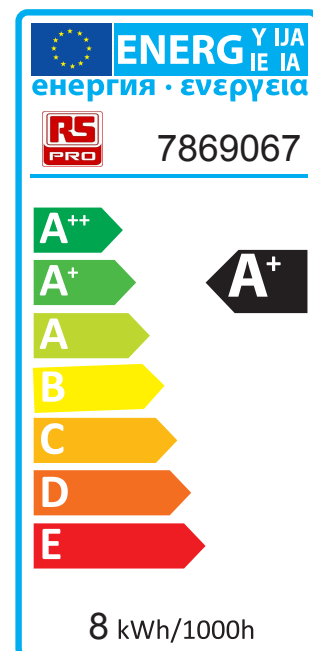

## G60 LED standard bulb

### UK

#### Key Features

- 8W LED lamp as 50W GLS replacement
- E27 base
- 100-240V~ input voltage
- Non-dimmable
- Mercury free
- 2 years guarantee

#### Common Characteristics<sup>1</sup>

Average lifetime: 25.000 h<sup>2</sup>  
 Switching cycles  
 (30s on, 30s off): 20.000 times  
 Casing Material: Plastic and alum  
 Starting time max.: < 0.5s  
 Warm up time for 60% light: < 1s  
 Power factor: > 0.50  
 Mercury max.: 0.0mg  
 Length: 108mm  
 Diameter: 60mm  
 Weight: 80g

#### Characteristics Range<sup>1</sup>

Input power: 8W  
 Luminous flux: 620lm

RS Article No.	Color temperature
7869064	3000 K = Warm white
7869067	4000 K = Cool white
7869061	6500 K = Day white


CRI: ≥ 80

<sup>1</sup> Typical values.

All the technical parameters apply to the entire lamp. In view of the complex manufacturing process for light emitting diodes, the typical values given above for the technical LED parameters are merely statistical values that do not necessarily correspond to the actual technical parameters of an individual product; individual products may vary from the typical values.

<sup>2</sup> The lifetime is estimated at room temperature(25 °C), free air burning, base up burning position and at rated voltage. To achieve a full lifetime a good heat exchange for the electronic components is required.



#### Technical Drawing



#### Lamp Conformity

2004/108/EC  
 Electromagnetic compatibility(EMC)  
 EN55015/A2:2009  
 Limits and methods of measurement of radio disturbance.  
 EN61547:2009  
 Electromagnetic compatibility immunity requirements.  
 EN61000-3-2/A2:2009  
 Electromagnetic compatibility - Limits for harmonic current emission.  
 EN61000-3-3:2008  
 Electromagnetic compatibility - Limitation of voltage changes, voltage fluctuations, flicker in public low voltage supply systems.  
 2006/95/EC  
 Electrical equipment designed for use within certain voltage limits.  
 EN60968/A2:1999  
 Self ballasted lamps for general lighting services - Safety requirement.  
 IEC62560:2011  
 Self ballasted LED-lamps for general lighting services by voltage >50V-Safety  
 EN62471:2008  
 Photobiological safety of lamps and lamp systems  
 EN62493: 2010  
 Assessment of lighting equipment related to human exposure to electromagnetic fields (EMF)  
 2011/65/EU  
 Restriction of the use of certain hazardous substances in electrical and electronic equipment (RoHS II)

#### Equivalent



#### Proper Use

Suitable for indoor use.  
 For outdoor applications and operation in damp locations special approved fixture are required.  
 Operating temperature range between -15 °C and 40 °C.

#### Application

Household luminaires  
 Hotels  
 Hospitals  
 Office space

#### Caution

Please take the time to read this installation guide. The guide contains important information and notes regarding the installation and operation.

#### DISCLAIMER:

We disclaims liability for any direct, indirect or incidental damages in case of installation performed either not according to this guide or not performed by a professional electrician.

#### Safety instruction

Always switch off the power supply before replacing. Only to apply in dry indoor usage and environments, outdoor applications requires an IP rated fixtures. Do not change the structure or an components of the LED lamp to ensure safety. Please read the installation instruction very carefully and follow the wiring instructions to ensure safety.