



Brand of NTN corporation

Technical data


6207EEC4

Single row deep groove ball bearings



Deep groove ball bearing, radial contact, pressed steel cage, contact seals on both sides

VISUAL (S)

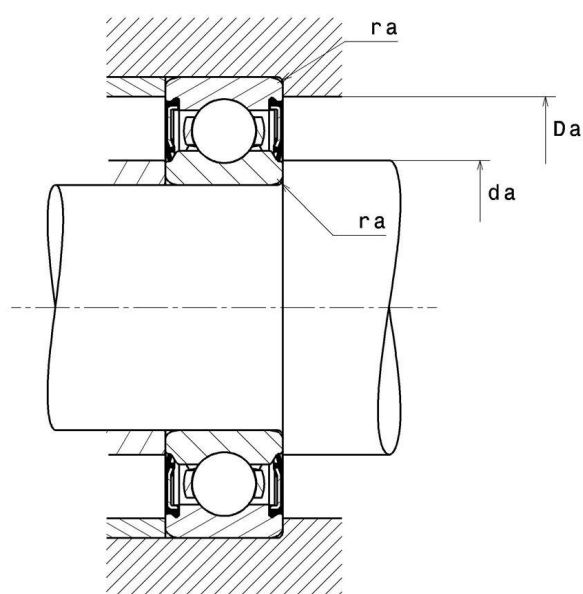

NTN Europe

1 rue des Usines · BP 2017 · 74010 Annecy Cedex · France · Tel. +33 (0)4 50 65 30 00
S.A. au capital de 322 639 919 € · RCS ANNECY B 325 821 072 · Id. Fiscale : FR 48 325 821 072
SIRET 325 821 072 00015 · Code APE 2815 Z · Code NACE 28.15

PRODUCT DEFINITION

Brand	SNR
d - Internal diameter	35 mm
D - External diameter	72 mm
B - Bearing/Inner ring width	17 mm
d1 - External diameter inner ring	44 mm
D1 - Inner diameter outer ring	62,7 mm
rs - Min fillet radius	1,1 mm
Radial clearance class	C4
Mass	0,285 kg

PRODUCT PERFORMANCE

C - Dynamic load	27100000 mN
C0 - Static load	15300000 mN
Cu - Fatigue limit load	700000 mN
f0 - Coefficient	13.8
N lim - Mechanical Limit Speed	39000 °/s
Tmin - Min operating temperature	243,15 °K
Tmax - Max operating temperature	393,15 °K

BEARING FREQUENCIES

BPFO - Over rolling frequency on outer ring (60 rpm)	3.565 Hz
BPFI - Over rolling frequency on inner (60 rpm)	5.435 Hz
BSF - Over rolling frequency on rolling element (60 rpm)	4.606 Hz
BRF - Rotational frequency - rolling element (60 rpm)	2.303 Hz
FTF - Rotational frequency - cage (60 rpm)	0.396 Hz



NTN Europe

1 rue des Usines · BP 2017 · 74010 Annecy Cedex · France · Tel. +33 (0)4 50 65 30 00
 S.A. au capital de 322 639 919 € · RCS ANNECY B 325 821 072 · Id. Fiscale : FR 48 325 821 072
 SIRET 325 821 072 00015 · Code APE 2815 Z · Code NACE 28.15

ABUTMENT

da min - Min shoulder diameter IR	41,5 mm
da max - Max shoulder diameter IR	25 mm
Da max - Max shoulder diameter OR	65,5 mm
ra max - Max shaft & housing fillet radius	1 mm

INDUSTRY CALCUL FACTORS

Equivalent dynamic radial load

$$P = X.F_r + Y.F_a$$

$\frac{f_0 F_a}{C_0}$	e	Fa / Fr ≤ e		Fa / Fr > e	
		X	Y	X	Y
0.172	0.19	1	0	0.56	2.3
0.345	0.22				1.99
0.689	0.26				1.71
1.03	0.28				1.55
1.38	0.3				1.45
2.07	0.34				1.31
3.45	0.38				1.15
5.17	0.42				1.04
6.89	0.44				1

Equivalent static radial load

$$P_0 = X_0.F_r + Y_0.F_a$$

X_0	Y_0
0.6	0.5

For single or DT bearing arrangement :

If $P_0 < F_r$, then use $P_0 = F_r$

