

HIGH BRIGHTNESS LED LIGHT BAR

Part Number: KASL-4805ZG25SX15/7

Green




ATTENTION OBSERVE PRECAUTIONS FOR HANDLING ELECTROSTATIC DISCHARGE SENSITIVE **DEVICES**

Features

- Dimension: 48mm X 5mm X 1.6mm.
- Instant light.
- Linear type.
- High efficiency.
- · Long operating life.
- Low power consumption.
- More energy efficient than incandescent, most halogen lamps, and fluorescent lamp.
- RoHS compliant.

Package Dimensions

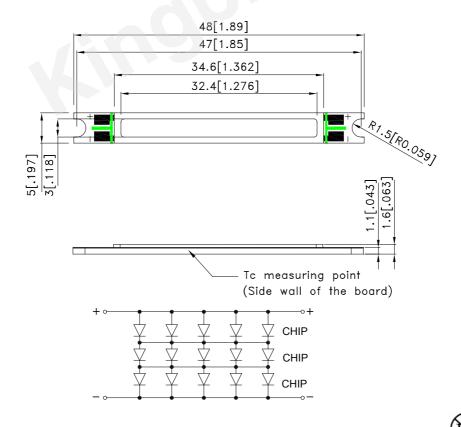

- All dimensions are in millimeters (inches).
 Tolerance is ±0.25(0.01") unless otherwise noted.
- 3.The specifications, characteristics and technical data described in the datasheet are subject to change without prior notice.

SPEC NO: DSAK3091 **APPROVED: WYNEC**


REV NO: V.4B CHECKED: Allen Liu

DATE: JUN/18/2013 DRAWN: Y.Liu


PAGE: 1 OF 8 ERP: 1209000148

Precautions

- 1. Do not touch the lens with any sharp object.
- 2. No stress should be applied on the lens.

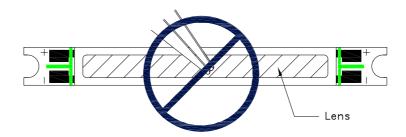

- 3. Thermal grease between the light bar and heat sink is recommended to fill air gaps for better thermal conductivity.
- 4. For securing the LED light bar, M2 screws are recommended. The light bar should not be bent or stressed in any way which could damage the internal circuit.

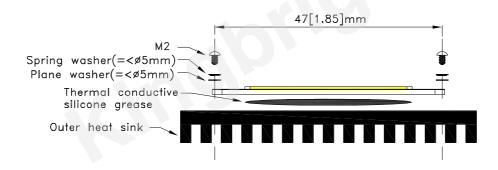

- 5. To prevent damages caused by electrostatic discharge (ESD), it is recommended to wear proper gear such as wristband or anti-static gloves when handling the product.
- 6. Constant current source is recommended to power the light bar. When more than one light bar are used, they should be connected in series if possible.
- 7. Thermal management should be taken into consideration when using the product. Maximum driving current should be reduced accordingly at higher ambient temperature to prevent overheating.
- 8. Soldering recommendations:
 - Soldering iron power should not exceed 40W, and should not be in contact with the joint for more than 3.5 secs.
 - The maximum soldering temperature should be less than 350°C.
 - Do not touch the product immediately after soldering.
 - Not reflow compatible.
- 9. As silicone encapsulation is permeable to gases, some corrosive substances such as H_2S might corrode silver plating of leadframe. Special care should be taken if an LED with silicone encapsulation is to be used near such substances.

SPEC NO: DSAK3091 REV NO: V.4B DATE: JUN/18/2013 PAGE: 2 OF 8

APPROVED: WYNEC CHECKED: Allen Liu DRAWN: Y.Liu ERP: 1209000148

Absolute Maximum Ratings

Parameter	Symbol	Rating	Units	
Forward Current	lF	700	mA	
Forward Pulse Current [1]	IFP	1000	mA	
Power Dissipation	Pd	8.12	W	
LED Junction Temperature	Tj	120	°C	
Operating Temperature	Topr	-30~+100	°C	
Storage Temperature	Tstg	-40~+120	°C	
Case Temperature	Tc	100	°C	

Electrical / Optical Characteristics

Part Name	Device	Parameter	Symbol	Min.	Тур.	Max.	Units	Conditions
KASL-4805ZG25SX15/7		Forward Voltage [2]	VF	8.4	10.8	11.6	V	Ir=700mA
		Luminous Flux [3]	Ф۷	180	240	-	lm	Ir=700mA
		Wavelength at peak emission[4]	λpeak	-	515	-	nm	IF=700mA
		Dominant Wavelength	λdom) -	525	-	nm	IF=700mA
		Spectral bandwidth at 50% PREL MAX	Δλ1/2	-	30	-	nm	IF=700mA
		Temperature coefficient of λpeak	TCλpeak	-	0.14	-	nm/°C	IF=700mA
	0	Temperature coefficient of λdom	TCλdom	-	0.11	-	nm/°C	IF=700mA
	Green	Temperature coefficient of Forward Voltage	ΔλVF/ΔΤ	-	-4	-	mV/°C	IF=700mA
		Thermal Resistance	Rth j-c	-	3.5	-	°C/W	I=700mA
		Emission Angle	2 to 1/2 X direction	-	120	-	0	I=700mA
			2 to 1/2 Y direction	-	120	-	0	IF=700mA

Test Item	Test Condition		
Moisture-proof Test	85°C , 85%RH for 1000 hours		

SPEC NO: DSAK3091 **REV NO: V.4B DATE: JUN/18/2013** PAGE: 3 OF 8 APPROVED: WYNEC **CHECKED: Allen Liu** DRAWN: Y.Liu ERP: 1209000148

Note: 1. 1/10 Duty Cycle, 0.1ms Pulse Width.


^{2.} Forward Voltage is measured with an accuracy of +/-0.1V.


^{3.}Flux is measured with an accuracy of +/-15%.


^{4.}Wavelength :+/-0.1nm.

^{5.}Luminous Flux value is traceable to the CIE127-2007 compliant national standards.

^{6.} Wavelength value is traceable to the CIE127-2007 compliant national standards.

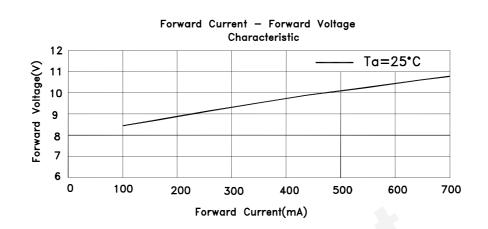


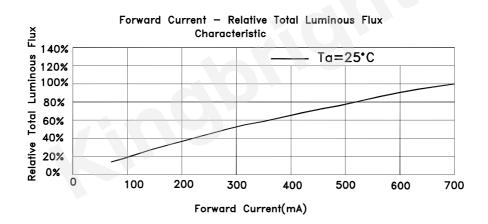


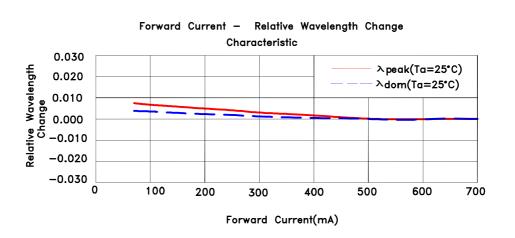


SPEC NO: DSAK3091 REV NO: V.4B DATE:
APPROVED: WYNEC CHECKED: Allen Liu DRAWN

DATE: JUN/18/2013 PAGE: 4 OF 8
DRAWN: Y.Liu ERP: 1209000148

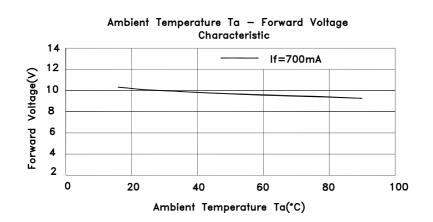


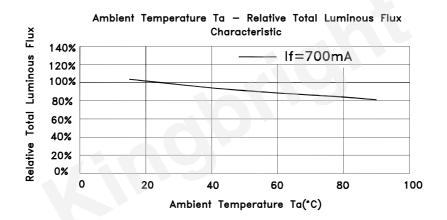

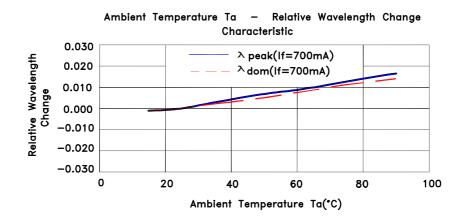

 SPEC NO: DSAK3091
 REV NO: V.4B
 DATE: JUN/18/2013
 PAGE: 5 OF 8

 APPROVED: WYNEC
 CHECKED: Allen Liu
 DRAWN: Y.Liu
 ERP: 1209000148

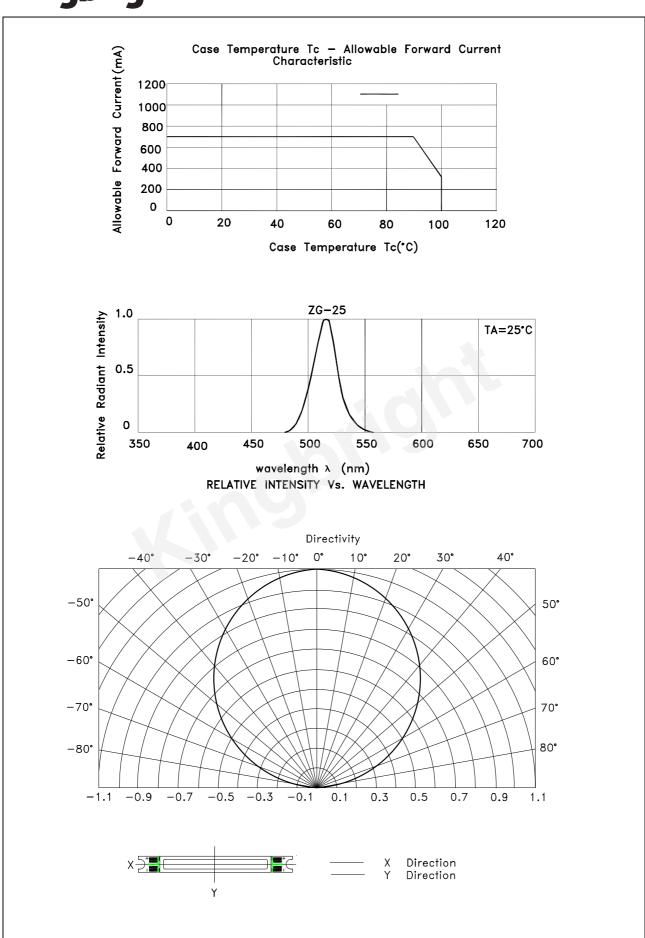

SPEC NO: DSAK3091 APPROVED: WYNEC REV NO: V.4B CHECKED: Allen Liu DATE: JUN/18/2013 DRAWN: Y.Liu PAGE: 6 OF 8 ERP: 1209000148


PACKING & LABEL SPECIFICATIONS

KASL-4805ZG25SX15/7


PACKING & LABEL SPECIFICATION

- (1) Primary packing
- 50 pieces are contained in each tray. Two trays which collectively contain 100 pieces are stacked together with an additional empty tray as lid.
- Tray (Dimensions:398x218x12mm, materials:electrically conductive PS.)

(2) Secondary packing
A set of three trays is placed in bag. (100 pieces per bag.)
An indication label which specifies product name, quantity, lot number and shipment date is attached to the outside of the 9# box.(800 pieces per box.)

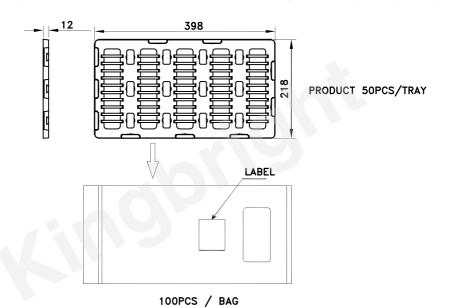





SPEC NO: DSAK3091 **APPROVED: WYNEC**

REV NO: V.4B CHECKED: Allen Liu

DATE: JUN/18/2013 DRAWN: Y.Liu

PAGE: 7 OF 8

ERP: 1209000148


KASL-4805 Application Note

Introduction

The KASL-4805 LED light bar provide very high light output, and can be configured to suit a wide rage of applications. However the heat generated during operation, if not handled properly, could shorten the product life significantly. Therefore for optimal performance, proper thermal management should be incorporated to keep it below the rated temperature. This document describes the heat sink attachment procedure.

Attachment to Heat sink


1. Apply a thin layer $(0.1 \sim 0.2 \text{ mm})$ of thermal grease on the bottom of the KASL-4805 LED light bar.

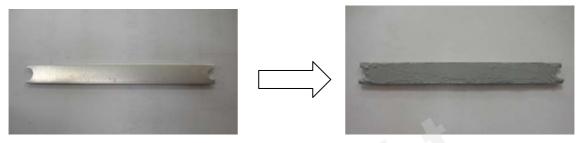

Rear surface


Thermal glue on rear surface

2. Press the KASL-4805 LED light bar firmly on the heat sink to ensure good contact between the heat sink and the LED light bar . A guide for heat sink size selection at various driving currents is listed in the table below.



3. A specifically designed electronic circuit is required to power the LED light bar . Do not connect the product directly to the main power.

Current (mA)	350	500	600	700
Heat sink surface area (mm²)	10,000	15,000	17,000	21,000



It is strongly recommended that temperature of pad be not highter than 75°C when you use the product.

Detailed application notes are listed on our website. http://www.kingbright.com/application notes

SPEC NO: DSAK3091 REV NO: V.4B DATE: JUN/18/2013 PAGE: 8 OF 8
APPROVED: WYNEC CHECKED: Allen Liu DRAWN: Y.Liu ERP: 1209000148