

VC-D1-ST15-PE - Contact insert



1855018

<https://www.phoenixcontact.com/in/products/1855018>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Contact insert, Range of articles: VARIOCON, design: VC1, number of positions: 15, min. conductor cross section: 0.14 mm^2 , max. conductor cross section: 1.5 mm^2 , rated voltage: 250, rated current: 10 A, Connection method: Crimp connection, Contact connection type: Pin, Connectors may only be connected/disconnected when under no load.

Your advantages

- Pin and socket contacts can be used on both the plug and device sides
- Contact carriers have two further capacitive PE contacts
- The connection data of 250 V/10 A corresponds to that of the HEAVYCON DD series
- Contact types meet the requirements of IEC 60352/DIN EN 60352

Commercial data

Item number	1855018
Packing unit	10 pc
Minimum order quantity	10 pc
Note	Made to order (non-returnable)
Sales key	ABL
Product key	ABLACB
Catalog page	Page 38 (C-2-2013)
GTIN	4017918159399
Weight per piece (including packing)	29.1 g
Weight per piece (excluding packing)	25.815 g
Customs tariff number	85366990
Country of origin	PL

Technical data

Notes

General	Connectors may only be connected/disconnected when under no load.
General	Please note that full assembly with the maximum conductor cross-section can cause the sheathed cable to have an impermissibly large external diameter. Dimension the conductor cross-section depending on the number of positions.
General	The contact carriers are not suitable for installation in VC-MP-K... coupling housings

Safety note

Safety note	WARNING: The connectors may not be plugged in or disconnected under load. Ignoring the warning or improper use may damage persons and/or property. • WARNING: Commission properly functioning products only. The products must be regularly inspected for damage. Decommission defective products immediately. Replace damaged products. Repairs are not possible. • WARNING: Only electrically qualified personnel may install and operate the product. They must observe the following safety notes. The qualified personnel must be familiar with the basics of electrical engineering. They must be able to recognize and prevent danger. The relevant symbol on the packaging indicates that only personnel familiar with electrical engineering are allowed to install and operate the product. • The products are suitable for applications in plant, controller, and electrical device engineering. • When operating the connectors in outdoor applications, they must be separately protected against environmental influences. • Assembled products may not be manipulated or improperly opened. • Only use mating connectors that are specified in the technical data of the standards listed (e.g. the ones listed in the product accessories online at phoenixcontact.com/products). • When using the product in direct connection with third-party manufacturers, the user is responsible. • For operating voltages > 50 V AC, conductive connector housings must be grounded • Ensure that the protective or functional ground has been properly connected. • VDE 0100/1.97 § 411.1.3.2 and DIN EN 60 204/11.98 § 14.1.3 are applicable when combining several circuits in a cable and/or connector • Observe the corresponding technical data. You will find information: - o On the product - o On the packing label - o In the supplied documentation - o Online at phoenixcontact.com/products under the product • Only use tools recommended by Phoenix Contact • The installation notes/Design In documents online on the
-------------	--

VC-D1-ST15-PE - Contact insert



1855018

<https://www.phoenixcontact.com/in/products/1855018>

download page at [phoenixcontact.com/products](https://www.phoenixcontact.com/products) must be observed for this product.

- Use a protective cap to protect connectors that are not in use. The suitable accessories are available online in the accessory section of the product at [phoenixcontact.com/products](https://www.phoenixcontact.com/products)

- Operate the connector only when it is fully plugged in.

- Ensure that when laying the cable, the tensile load on the connectors does not exceed the upper limit specified in the standards.

- Observe the minimum bending radius of the cable. Lay the cable without twisting it.

- The connector warms up in normal operation. Depending on the ambient conditions, the surface of the connector can continue to warm up. In this case, the user is responsible for posting warnings (e.g. DIN EN ISO 13732-1:2008-12).

Product properties

Product type	Contact insert
Product family	VARIOCON
Series	VC-D
Type	VC1
Number of positions	15
Connection profile	15+PE
Contact material type	turned
	rolled

Insulation characteristics

Degree of pollution	2
---------------------	---

Electrical properties

Rated voltage (II/2)	250 V
Rated voltage (III/3)	250 V
	250 V
Nominal voltage ATD	250 (III/2.00)
Rated surge voltage	4 kV
Rated surge voltage (II/2)	4 kV
Rated surge voltage	4 kV
Rated current	10 A
	10 A
	max. 10 A
Nominal voltage U_N	250 V

Connection data

Connection method	Crimp connection
Conductor cross section flexible	1.5 mm ²

Dimensions


VC-D1-ST15-PE - Contact insert

1855018

<https://www.phoenixcontact.com/in/products/1855018>



Dimensional drawing



Width	25.4 mm
Height	35.5 mm
Length	48.8 mm

Mechanical characteristics

Contact diameter	1.6 mm
------------------	--------

Material specifications

Color of the housing part	black
Material Housing	Polyamide
Material Contact carrier	PA-GF
Material Contact	CuZn
Flammability rating according to UL 94	V0
Insulating material group	I
Contact surface material	nickel-plated

Cable/line

Single wire, cross section	0.14 mm ² 1.5 mm ²
Stripping length of the individual wire	8 mm

Mechanical properties

Mechanical data

Insertion/withdrawal cycles	>= 500
-----------------------------	--------

Environmental and real-life conditions

Ambient conditions

Ambient temperature (operation)	-40 °C ... 125 °C
---------------------------------	-------------------


VC-D1-ST15-PE - Contact insert

1855018

<https://www.phoenixcontact.com/in/products/1855018>



Drawings

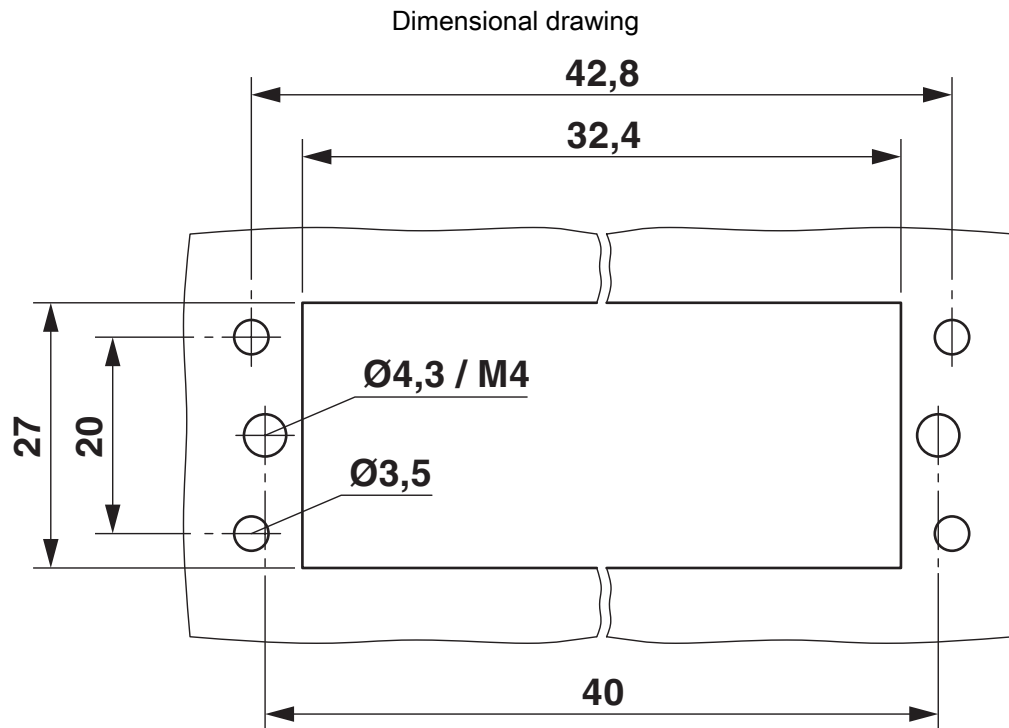

Mounting cutout


VC-D1-ST15-PE - Contact insert

1855018

<https://www.phoenixcontact.com/in/products/1855018>



Dimensional drawing

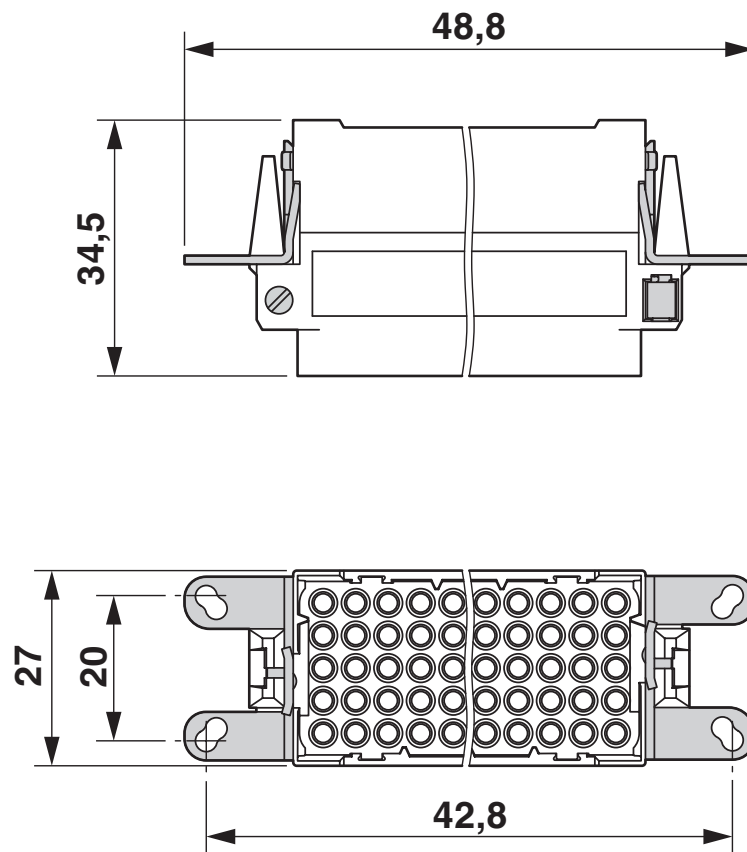

Contact insert

VC-D1-ST15-PE - Contact insert



1855018

<https://www.phoenixcontact.com/in/products/1855018>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/in/products/1855018>

cUL Recognized Approval ID: E118976				
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
	250 V	4 A	-	-

UL Recognized Approval ID: E118976				
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
	250 V	4 A	-	-

cULus Recognized				
------------------	--	--	--	--

VC-D1-ST15-PE - Contact insert



1855018

<https://www.phoenixcontact.com/in/products/1855018>

Classifications

ECLASS

ECLASS-11.0	27440223
ECLASS-12.0	27440223
ECLASS-13.0	27440223

ETIM

ETIM 9.0	EC003557
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

VC-D1-ST15-PE - Contact insert



1855018

<https://www.phoenixcontact.com/in/products/1855018>

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

VC-D1-ST15-PE - Contact insert

1855018

<https://www.phoenixcontact.com/in/products/1855018>



Accessories

VC-D-AF - Panel-mount flange

1855319

<https://www.phoenixcontact.com/in/products/1855319>



Panel mounting flange for screw locking, for fixing the crimp contact insert to the housing panel, with two M3 threaded holes and one M4 threaded hole

CK1,6-ED-0,37ST AG - Crimp contact

1663336

<https://www.phoenixcontact.com/in/products/1663336>



Crimp contact, contact diameter: 1.6 mm, turned, Pin, contact material: Copper alloy, contact surface: silver-plated, connection cross section: 0.14 mm² ... 0.37 mm², AWG 26 ... 22

VC-D1-ST15-PE - Contact insert

1855018

<https://www.phoenixcontact.com/in/products/1855018>



CK1,6-ED-0,37ST AU - Crimp contact

1674901

<https://www.phoenixcontact.com/in/products/1674901>



Crimp contact, contact diameter: 1.6 mm, turned, Pin, contact material: Copper alloy, contact surface: gold-plated, connection cross section: 0.14 mm² ... 0.37 mm², AWG 26 ... 22

CK1,6-ED-1,50ST AU - Crimp contact

1674875

<https://www.phoenixcontact.com/in/products/1674875>



Crimp contact, contact diameter: 1.6 mm, turned, Pin, contact material: Copper alloy, contact surface: gold-plated, connection cross section: 1.5 mm² ... 1.5 mm², AWG 16

VC-D1-ST15-PE - Contact insert

1855018

<https://www.phoenixcontact.com/in/products/1855018>



CK1,6-ED-0,50ST AG - Crimp contact

1663349

<https://www.phoenixcontact.com/in/products/1663349>



Crimp contact, contact diameter: 1.6 mm, turned, Pin, contact material: Copper alloy, contact surface: silver-plated, connection cross section: $0.5 \text{ mm}^2 \dots 0.5 \text{ mm}^2$, AWG 20

CK1,6-ER-1,00ST OIC AG - Crimp contact

1004360

<https://www.phoenixcontact.com/in/products/1004360>



Crimp contact, contact diameter: 1.6 mm, rolled, Pin, contact material: Cu alloy, nickel-plated, contact surface: silver-plated, connection cross section: $0.34 \text{ mm}^2 \dots 1 \text{ mm}^2$, AWG 22 ... 17

VC-D1-ST15-PE - Contact insert

1855018

<https://www.phoenixcontact.com/in/products/1855018>



CK1,6-ED-0,50ST AU - Crimp contact

1672453

<https://www.phoenixcontact.com/in/products/1672453>



Crimp contact, contact diameter: 1.6 mm, turned, Pin, contact material: Copper alloy, contact surface: gold-plated, connection cross section: $0.5 \text{ mm}^2 \dots 0.5 \text{ mm}^2$, AWG 20

CK1,6-ER-2,50ST OIC AG - Crimp contact

1004365

<https://www.phoenixcontact.com/in/products/1004365>



Crimp contact, contact diameter: 1.6 mm, rolled, Pin, contact material: Cu alloy, nickel-plated, contact surface: silver-plated, connection cross section: $1.5 \text{ mm}^2 \dots 2.5 \text{ mm}^2$, AWG 16 ... 14

VC-D1-ST15-PE - Contact insert

1855018

<https://www.phoenixcontact.com/in/products/1855018>



CK1,6-ED-0,75ST AG - Crimp contact

1663352

<https://www.phoenixcontact.com/in/products/1663352>



Crimp contact, contact diameter: 1.6 mm, turned, Pin, contact material: Copper alloy, contact surface: silver-plated, connection cross section: 0.75 mm² ... 0.75 mm², AWG 18

CK1,6-ED-ST-POF - Pin contact

1884995

<https://www.phoenixcontact.com/in/products/1884995>



POF fiber optic pin contact, turned, for contact carriers (HC-DD...I-CT.../ HC-M-12-CT-.../ HC-M-17-CT-...) of CK1,6-ED... contacts

VC-D1-ST15-PE - Contact insert

1855018

<https://www.phoenixcontact.com/in/products/1855018>



CK1,6-ED-0,75ST AU - Crimp contact

1674914

<https://www.phoenixcontact.com/in/products/1674914>



Crimp contact, contact diameter: 1.6 mm, turned, Pin, contact material: Copper alloy, contact surface: gold-plated, connection cross section: 0.75 mm² ... 0.75 mm², AWG 18

CRIMPFOX-1,6-ED-POF-N - Crimping pliers

1584839

<https://www.phoenixcontact.com/in/products/1584839>



Crimping pliers for turned fiber optics contacts CK1,6-ED...POF

VC-D1-ST15-PE - Contact insert

1855018

<https://www.phoenixcontact.com/in/products/1855018>



CK1,6-ED-1,00ST AG - Crimp contact

1663365

<https://www.phoenixcontact.com/in/products/1663365>



Crimp contact, contact diameter: 1.6 mm, turned, Pin, contact material: Copper alloy, contact surface: silver-plated, connection cross section: 1 mm² ... 1 mm², AWG 18

CRIMPFOX-1,6/2,5-ED-4,0 - Crimping pliers

1687419

<https://www.phoenixcontact.com/in/products/1687419>



Crimping pliers, for turned contacts, CK 1.6 ED... and CK 2.5 ED...

VC-D1-ST15-PE - Contact insert

1855018

<https://www.phoenixcontact.com/in/products/1855018>



CK1,6-ED-1,00ST AU - Crimp contact

1674888

<https://www.phoenixcontact.com/in/products/1674888>



Crimp contact, contact diameter: 1.6 mm, turned, Pin, contact material: Copper alloy, contact surface: gold-plated, connection cross section: 1 mm² ... 1 mm², AWG 18

CRIMPFOX VC 0,14-1,5 R - Crimping pliers

1884843

<https://www.phoenixcontact.com/in/products/1884843>



Crimping pliers for rolled contacts CK 1.6-ER... and ...-BR..., 0.5 - 1.5 mm²

VC-D1-ST15-PE - Contact insert

1855018

<https://www.phoenixcontact.com/in/products/1855018>



CK1,6-ED-1,50ST AG - Crimp contact

1663378

<https://www.phoenixcontact.com/in/products/1663378>



Crimp contact, contact diameter: 1.6 mm, turned, Pin, contact material: Copper alloy, contact surface: silver-plated, connection cross section: $1.5 \text{ mm}^2 \dots 1.5 \text{ mm}^2$, AWG 16

CK1,6-BR-1,00ST OIC AG - Crimp contact

1004380

<https://www.phoenixcontact.com/in/products/1004380>



Crimp contact, contact diameter: 1.6 mm, rolled, Pin, contact material: Cu alloy, nickel-plated, contact surface: silver-plated, connection cross section: $0.34 \text{ mm}^2 \dots 1 \text{ mm}^2$, AWG 22 ... 17, Taped products

VC-D1-ST15-PE - Contact insert

1855018

<https://www.phoenixcontact.com/in/products/1855018>



UNIFOX MT-CK 1.6/2.5 - Assembly tool

1089092

<https://www.phoenixcontact.com/in/products/1089092>

Assembly tool, for CK 1.6... crimp contacts for small conductor cross sections



CK1,6-BR-2,50ST OIC AG - Crimp contact

1004382

<https://www.phoenixcontact.com/in/products/1004382>

Crimp contact, contact diameter: 1.6 mm, rolled, Pin, contact material: Cu alloy, nickel-plated, contact surface: silver-plated, connection cross section: 1.5 mm² ... 2.5 mm², AWG 16 ... 14, Taped products



VC-D1-ST15-PE - Contact insert

1855018

<https://www.phoenixcontact.com/in/products/1855018>



EWR - Contact insertion and removal tool

1665075

<https://www.phoenixcontact.com/in/products/1665075>



Contact insertion and removal tool, Range of articles: VARIOCON, min. conductor cross section: 0.14 mm², max. conductor cross section: 0.56 mm², Contact connection type: Socket + pin

Phoenix Contact 2025 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT (I) Pvt. Ltd.

A-58/2, Okhla Industrial Area, Phase - II, New Delhi-110 020

+91.1275.71420

info@phoenixcontact.co.in