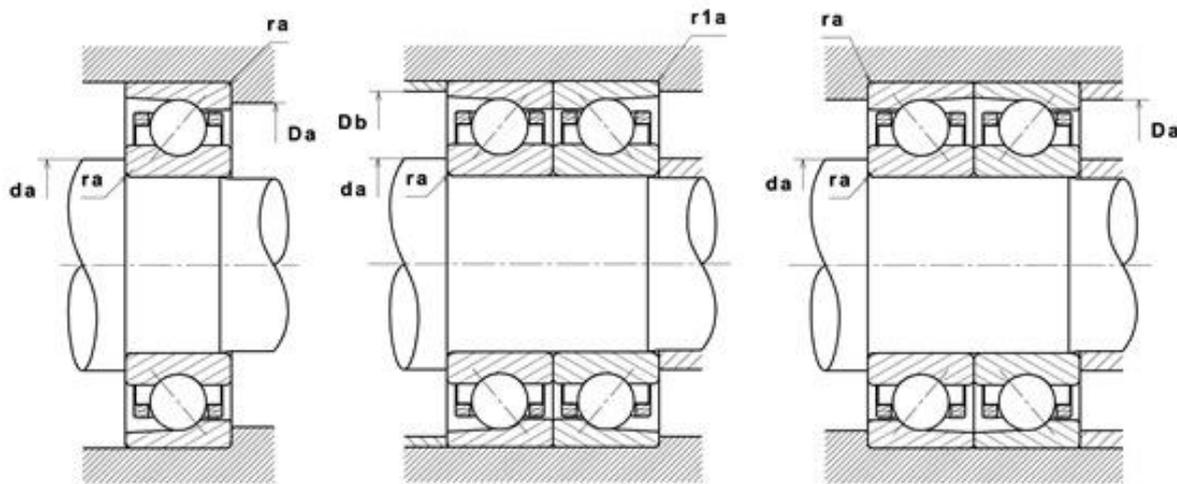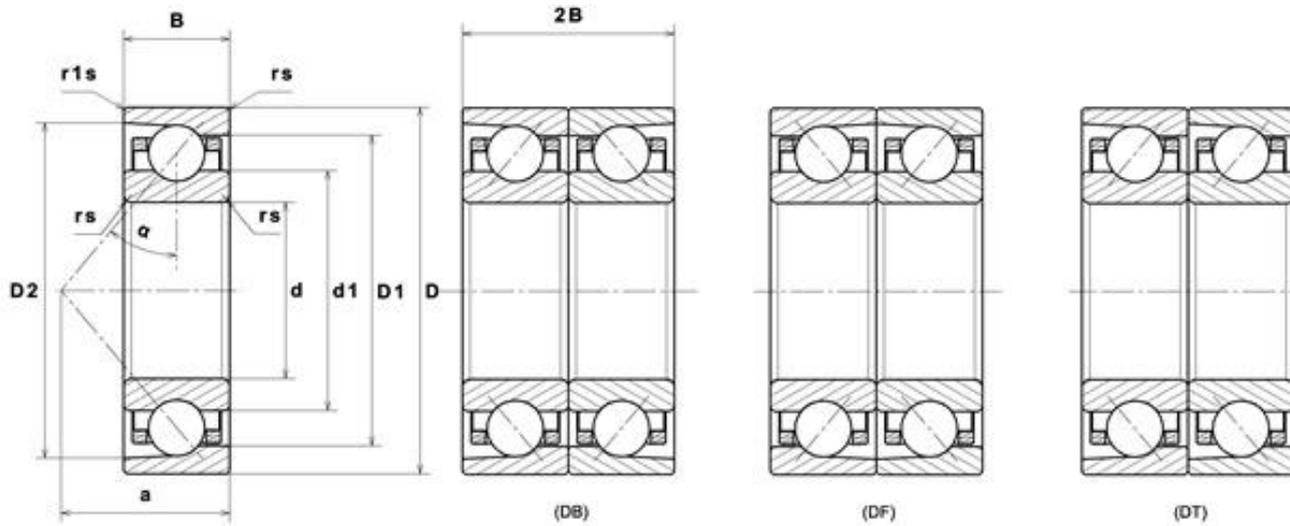# Technical data

7210CG1DUJ74
High precision angular contact ball bearings

VISUAL (S)

(DB)   (DF)   (DT)

NTN Europe
1 rue des Usines · BP 2017 · 74010 Annecy Cedex · France · Tel. +33 (0)4 50 65 30 00
S.A. au capital de 322 639 919 € · RCS ANNECY B 325 821 072 · Id. Fiscale : FR 48 325 821 072
SIRET 325 821 072 00015 · Code APE 2815 Z · Code NACE 28.15

Page 1/4

7210CG1DUJ74
High precision angular contact ball bearings

PRODUCT DEFINITION	
Brand	SNR
d - Internal diameter	50 mm
D - External diameter	90 mm
B - Bearing/Inner ring width	20 mm
d1 - External diameter inner ring	62,45 mm
D1 - Inner diameter outer ring	76,85 mm
D2 - Inner diameter outer ring	82,83 mm
a - Charge load application point	19 mm
- Contact angle	15 °
rs - Min fillet radius	1,1 mm
r1s - Min fillet radius	0,6 mm
Precision class	P4
Mass	0,486 kg

PRODUCT PERFORMANCE	
C - Dynamic load	44800000 mN
C0 - Static load	34000000 mN
Cu - Fatigue limit load	1820000 mN
f0 - Coefficient	14.56
Axial displacement K Factor	1.21
Preload level	7
Preload value	240000 mN
Axial rigidity	75 N/µm
Radial rigidity	421 N/µm

7210CG1DUJ74
High precision angular contact ball bearings

PRODUCT PERFORMANCE	
Tmin - Min operating temperature	243,15 °K
Tmax - Max operating temperature	393,15 °K
N lim - Oil lubrication limit speed	144000 °/s
N lim - Grease lubrication limit speed	90000 °/s

BEARING FREQUENCIES	
BPFO - Over rolling frequency on outer ring (60 rpm)	6.186 Hz
BPFI - Over rolling frequency on inner (60 rpm)	8.814 Hz
BSF - Over rolling frequency on rolling element (60 rpm)	5.343 Hz
BRF - Rotational frequency – rolling element (60 rpm)	2.672 Hz
FTF - Rotational frequency - cage (60 rpm)	0.412 Hz

ABUTMENT	
da min - Min shoulder diameter IR	57 mm
db min - Min IR shoulder diameter	57 mm
Da max - Max shoulder diameter OR	83 mm
Db max - Max OR shoulder diameter	83 mm
r1a - Max fillet radius	0,6 mm
ra max - Max shaft & housing fillet radius	1 mm

INDUSTRY CALCUL FACTORS

Equivalent dynamic radial load

$P = X.Fr + Y.Fa$

Series			e	Single or DT bearing arrangement				DB or DF arrangement			
				Fa/Fr ≤ e		Fa/Fr > e		Fa/Fr ≤ e		Fa/Fr > e	
				X	Y	X	Y	X	Y	X	Y
70 (NTN & SNR) 72 (NTN & SNR) 78 (NTN) 79 (NTN) 719 (SNR)	15°	0.178	0.38	1	0	0.44	1.47	1	1.65	0.72	2.39
		0.357	0.4				1.4		1.57		2.28
		0.714	0.43				1.3		1.46		2.11
		1.07	0.46				1.23		1.38		2
		1.43	0.47				1.19		1.34		1.93
		2.14	0.5				1.12		1.26		1.82
		3.57	0.55				1.02		1.14		1.66
		5.35	0.56						1.12		1.63
		7.14	0.56				1		1.12		1.63
	25°		0.68			0.41	0.87		0.92	0.67	1.41
	30°		0.8			0.39	0.76		0.78	0.63	1.24

Equivalent static radial load

$Po = Xo.Fr + Yo.Fa$

Series		Single or DT bearing arrangement		DB or DF arrangement	
		X_0	Y_0	X_0	Y_0
70 (NTN & SNR) 72 (NTN & SNR) 78 (NTN) 79 (NTN) 719 (SNR)	15°	0.5	0.46	1	0.92
	25°		0.38		0.76
	30°		0.33		0.66

For single or DT bearing arrangement :

If Po <Fr, then use Po = Fr