




ENGLISH

Datasheet

Multiple Output Programmable Linear D.C. Power Supply

Stock No. : Model :

123-3558 **IPS-2303S** 123-3559 **IPS-3303D**
123-3560 **IPS-3303S** 123-3561 **IPS-4303S**

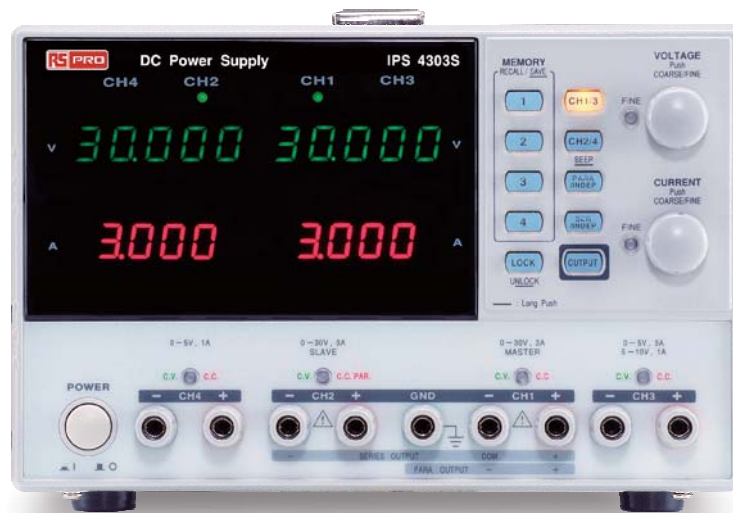

FEATURES

- 2,3,and 4 Independent Isolated Output
- 4 LED Display Sets : 3 Digits After Decimal Point (IPS-2303S/3303S/4303S)
- Minimum Resolution : IPS-2303S/3303S/4303S (1mV/1mA)
IPS-3303D (100mV/10mA)
- Digital Panel Control (Rotary Encoder Switch, Rubber Key With Indicator)
- User-Friendly Operation, Coarse/Fine Volume Control
- 4 Sets Save/Recall
- Key-Lock
- Output ON/OFF
- Tracking Series and Parallel Mode
- Smart Cooling Fan Achieving Low Noise
- Compact Design
- PC Software & USB Driver
- USB Standard Interface
- 3 Years Warranty



The IPS-Series contain the superior technology and high quality which RS PRO had established through its long history of power supply design and manufacturing. The IPS-Series offers digital panel control, large display, bright LED indicators, high output resolution, 4 sets of setup memory, USB remote control and smart cooling fan control. Additionally, the IPS-Series provide easy operation, a wide selection of panel settings and the most important for a reasonable price. All these features make the IPS-Series the most promising new comer in the power supply market.

High Resolution

With 1mV/1mA (for IPS-2303S/3303S/4303S) high resolution and coarse/fine volume control the IPS-Series, guarantees clean and stable output. Using the IPS-Series you can easily simulate the device under test's accurate behavior against small changes in voltage or current, which is impossible when using a low resolution power supply.

Tracking Series and Parallel Function

Tracking series and parallel function allows you to use the IPS-Series in wide range of applications. The tracking series mode guarantees higher output voltage, while the tracking parallel mode guarantees higher output current.

Convenience Functions

The knobs are digitally controlled, allowing fine or coarse volume setting. The key lock feature locks panel operations, preventing accidental change of the settings which might lead damaging for the equipments.

4 Sets of Save / Recall

The IPS-Series can save and recall panel settings, these feature which can not offered by general power supplies. You can quickly select a panel setting from four memory sets without manual configuration.

USB Remote Control

The USB device port in the IPS-Series allows you to remotely control the power supply according to your application needs.

APPLICATIONS

- Laboratories and Educational Facilities
- Product Testing and Quality Assurance
- Service Operation and Post-Sales Support
- Product Development and Debugging

FUNCTION FEATURES



1. Bright LED display shows settings or actual level of output
2. The independent CH3 output offers three commonly used voltage settings (IPS-3303S/3303D only)
3. C.V./C.C. modes are clearly indicated in different colors
4. Smart cooling fan control offers a well-balanced cooling mechanism, ensuring quiet operation
5. The tracking series and parallel mode can be selected with a single touch
6. Indicators embedded in the keys provide an instant view of the power supply status; the Key Lock feature prevents improper operation



SPECIFICATIONS													
		IPS-2303S		IPS-3303S			IPS-4303S			IPS-3303D			
OUTPUT	Channel Voltage Current	CH1 0~30V 0~3A	CH2 0~30V 0~3A	CH1 0~30V 0~3A	CH2 0~30V 0~3A	CH3 2.5/3.3/5.0V 0~3A	CH1 0~30V 0~3A	CH2 0~30V 0~3A	CH3 0~5V or 5.001V~10V 0~3A or 0~1A	CH4 0~5V 0~1A	CH1 0~30V 0~3A	CH2 0~30V 0~3A	CH3 2.5/3.3/5.0V 0~3A
CONSTANT VOLTAGE OPERATION	Regulation	Line regulation $\leq 0.01\%+3mV$ Load regulation $\leq 0.01\%+3mV$ (rating current $\leq 3A$) $\leq 0.02\%+5mV$ (rating current $>3A$)											
	Ripple & Noise	$\leq 1mVrms$ (5Hz~1MHz)											
	Recovery Time	$\leq 100 \mu s$ (50%Load change, Minimum load 0.5A)											
	Temp.Coefficient	$\leq 300ppm / ^\circ C$											
	Output Range	0 to rating voltage continuously adjustable											
CONSTANT CURRENT OPERATION	Regulation	Line regulation $\leq 0.2\%+3mA$ Load regulation $\leq 0.2\%+3mA$											
	Ripple Current	$\leq 3mArms$											
	Output Range	0 to rating current continuously adjustable											
TRACKING OPERATION	Regulation of PAR.	Line regulation $\leq 0.01\%+3mV$ Load regulation $\leq 0.01\%+3mV$ (rating current $\leq 3A$) $\leq 0.02\%+5mV$ (rating current $>3A$)											
	Regulation of SER.	Line regulation $\leq 0.01\%+5mV$ Load regulation $\leq 300mV$ Tracking error $\leq 0.5\% \pm 10mV$ (10 ~ 30V no load) with load added $\leq 300mV$ $\leq 0.5\% \pm 30mV$ (0 ~ 9.99V no load) with load added $\leq 300mV$											
	Tracking error	$\leq 0.5\% + 10mV$						$\leq 0.5\% + 50mV$					
METER	Display	Voltage : 4 3/4 digits 0.4" LED Display Current : 3 3/4 digits 0.4" LED Display						Voltage: 2 3/4 digits 0.4" LED Display Current: 2 3/4 digits 0.4" LED Display					
	Resolution	Voltage : 1mV Current : 1mA						Voltage: 100mV Current: 10mA					
	Program Accuracy(25\pm5$^\circ$C)	Voltage : $\pm(0.03\%$ of RDG +10 digits) Current : $\pm(0.3\%$ of RDG +10 digits)						Voltage: $\pm(0.5\%$ of RDG+2 digits) Current: $\pm(0.5\%$ of RDG+2 digits)					
	Readback Accuracy(25\pm5$^\circ$C)	Voltage : $\pm(0.03\%$ of RDG +10 digits) Current : $\pm(0.3\%$ of RDG +10 digits)						Voltage: $\pm(0.5\%$ of RDG+2 digits) Current: $\pm(0.5\%$ of RDG+2 digits)					
CH3 SPECIFICATIONS	Output Voltage	-		(2.5V/3.3V/5V) $\pm 8\%$ 3A			0~5V / 5~10V 0~3A / 0~1A			(2.5V/3.3V/5V) $\pm 8\%$ 3A			
	Output Current Regulation(25\pm5$^\circ$C)	-		Line regulation $\leq 0.01\%+3mV$ Load regulation $\leq 0.01\%+3mV$			Line regulation $\leq 0.01\%+3mV$ Load regulation $\leq 0.01\%+3mV$			Line regulation $\leq 0.01\%+3mV$ Load regulation $\leq 0.01\%+3mV$			
	Repple & Noise	-		$\leq 1mVrms$ (5Hz~1MHz)			$\leq 2mVrms$ (5Hz~1MHz)			$\leq 1mVrms$ (5Hz~1MHz)			
KEY LOCK		Yes											
MEMERY SAVE/RECALL		4 sets											
POWER SOURCE		AC100V/120V/220V/230V $\pm 10\%$, 50/60Hz											
DIMENSION & WEIGHT		210(W) x 130 (H) x 265 (D) mm ; Approx. 7kg											

Specifications subject to change without notice.

ORDERING INFORMATION

IPS-2303S IPS-2303S 2 Channels, 180W Programmable Linear DC Power Supply
IPS-3303S IPS-3303S 3 Channels, 195W Programmable Linear DC Power Supply
IPS-4303S IPS-4303S 4 Channels, 195W Programmable Linear DC Power Supply
IPS-3303D IPS-3303D 3 Channels, 195W Programmable Linear DC Power Supply

ACCESSORIES

User Manual x 1 , Power cord x 1
IPS-2303S Test Lead GTL-104Ax2
IPS-3303S Test Lead GTL-104Ax2,GTL-105Ax1
IPS-4303S Test Lead GTL-104Ax2,GTL-105Ax2
IPS-3303D Test Lead GTL-104Ax2,GTL-105Ax1



P. O. Box 99
 Corby
 Northants NN17 9RS
 England
 Tel: +44(0) 1536 201234