



solid-state contactor 1-pole 3RF3 AC-1 / 20 A / 40 °C 48-460 V / 110-230 V AC  
short-circuit-proof with B miniature circuit breaker spring-loaded terminal

product brand name	SIRIUS
product designation	solid-state contactor
product type designation	3RF33
<b>General technical data</b>	
product function	zero-point switching
product feature	short-circuit-proof with B miniature circuit breaker
power loss [V·A] maximum	18.6 VA
power loss [W] for rated value of the current	
• at AC in hot operating state	18.5 W
• at AC in hot operating state per pole	18.5 W
• without load current share typical	3.5 W
insulation voltage rated value	600 V
degree of pollution	3
surge voltage resistance of main circuit rated value	6 kV
protection class IP	IP20
protection class IP on the front according to IEC 60529	IP20
shock resistance according to IEC 60068-2-27	15g / 11 ms
vibration resistance according to IEC 60068-2-6	2g
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	01/15/2024
SVHC substance name	Lead - 7439-92-1 Lead monoxide (lead oxide) - 1317-36-8 Dibutylbis(pentane-2,4-dionato-O,O')tin - 22673-19-4
Net Weight	0.185 kg
<b>Main circuit</b>	
number of poles for main current circuit	1
number of NO contacts for main contacts	1
number of NC contacts for main contacts	0
type of voltage of the operating voltage	AC
operating voltage	
• at AC	
— at 50 Hz rated value	48 ... 460 V
— at 60 Hz rated value	48 ... 460 V
operating frequency rated value	50 ... 60 Hz
relative symmetrical tolerance of the operating frequency	10 %
operating range relative to the operating voltage at AC	
• at 50 Hz	40 ... 506 V
• at 60 Hz	40 ... 506 V
operational current rated value maximum	20 A
operational current	

<ul style="list-style-type: none"> <li>• at AC-1 at 400 V rated value</li> </ul>	20 A
<ul style="list-style-type: none"> <li>• at AC-51 rated value</li> </ul>	20 A
<ul style="list-style-type: none"> <li>• at AC-51 according to IEC 60947-4-3</li> </ul>	20 A
<ul style="list-style-type: none"> <li>• according to UL 508 rated value</li> </ul>	16 A
<b>ampacity maximum</b>	20 A
<b>operational current minimum</b>	500 mA
<b>operational current of the MCB at AC rated value</b>	20 A
<b>rate of voltage rise at the thyristor for main contacts maximum permissible</b>	1 000 V/ $\mu$ s
<b>blocking voltage at the thyristor for main contacts maximum permissible</b>	1 200 V
<b>reverse current of the thyristor</b>	10 mA
<b>derating temperature</b>	40 °C
<b>surge current resistance rated value</b>	1 300 A
<b>I<sup>2</sup>t value maximum</b>	8 000 A <sup>2</sup> ·s
<b>Control circuit/ Control</b>	
<b>type of voltage of the control supply voltage</b>	AC
<b>control supply voltage at AC</b>	
<ul style="list-style-type: none"> <li>• at 50 Hz</li> </ul>	110 ... 230 V
<ul style="list-style-type: none"> <li>• at 60 Hz</li> </ul>	110 ... 230 V
<b>control supply voltage 1 at AC</b>	
<ul style="list-style-type: none"> <li>• at 50 Hz</li> </ul>	110 ... 230 V
<ul style="list-style-type: none"> <li>• at 60 Hz</li> </ul>	110 ... 230 V
<b>control supply voltage frequency</b>	
<ul style="list-style-type: none"> <li>• 1 rated value</li> </ul>	50 Hz
<ul style="list-style-type: none"> <li>• 2 rated value</li> </ul>	60 Hz
<b>control supply voltage at AC</b>	
<ul style="list-style-type: none"> <li>• at 50 Hz full-scale value for signal&lt;0&gt; recognition</li> </ul>	40 V
<ul style="list-style-type: none"> <li>• at 60 Hz full-scale value for signal&lt;0&gt; recognition</li> </ul>	40 V
<b>control supply voltage</b>	
<ul style="list-style-type: none"> <li>• at AC initial value for signal &lt;1&gt; detection</li> </ul>	90 V
<b>symmetrical line frequency tolerance</b>	5 Hz
<b>operating range factor control supply voltage rated value at AC at 50 Hz</b>	
<ul style="list-style-type: none"> <li>• initial value</li> </ul>	0.82
<b>operating range factor control supply voltage rated value at AC at 60 Hz</b>	
<ul style="list-style-type: none"> <li>• initial value</li> </ul>	0.82
<b>control current at minimum control supply voltage</b>	
<ul style="list-style-type: none"> <li>• at AC</li> </ul>	2 mA
control current at AC rated value	15 mA
<b>ON-delay time</b>	40 ms; additionally max. one half-wave
<b>OFF-delay time</b>	40 ms; additionally max. one half-wave
<b>Installation/ mounting/ dimensions</b>	
fastening method side-by-side mounting	Yes
<b>fastening method</b>	screw fixing and snap-on mounting on standard mounting rail 35 mm according to IEC 60715
<b>design of the thread of the screw for securing the equipment</b>	M4
<b>height</b>	95 mm
<b>width</b>	22.5 mm
<b>depth</b>	121 mm
<b>Connections/ Terminals</b>	
<b>product component removable terminal for auxiliary and control circuit</b>	Yes
<b>type of electrical connection</b>	
<ul style="list-style-type: none"> <li>• for main current circuit</li> </ul>	spring-loaded terminals
<ul style="list-style-type: none"> <li>• for auxiliary and control circuit</li> </ul>	spring-loaded terminals
<b>type of connectable conductor cross-sections</b>	
<ul style="list-style-type: none"> <li>• for main contacts</li> </ul>	
— solid	2x (0.5 ... 2.5 mm <sup>2</sup> )

— finely stranded with core end processing	2x (0.5 ... 1.5 mm <sup>2</sup> )
— finely stranded without core end processing	2x (0.5 ... 2.5 mm <sup>2</sup> )
● for AWG cables for main contacts	2x (18 ... 14)
<b>connectable conductor cross-section for main contacts</b>	
● solid or stranded	0.5 ... 2.5 mm <sup>2</sup>
● finely stranded with core end processing	0.5 ... 1.5 mm <sup>2</sup>
● finely stranded without core end processing	0.5 ... 2.5 mm <sup>2</sup>
<b>type of connectable conductor cross-sections</b>	
● for auxiliary and control contacts	
— solid	0.5 ... 1.5 mm <sup>2</sup>
— finely stranded with core end processing	0.5 ... 2.5 mm <sup>2</sup>
— finely stranded without core end processing	0.5 ... 2.5 mm <sup>2</sup>
● for AWG cables for auxiliary and control contacts	1x (20 ... 12)
<b>AWG number as coded connectable conductor cross section for main contacts</b>	18 ... 14
<b>stripped length of the cable</b>	
● for main contacts	10 mm
● for auxiliary and control contacts	10 mm
<b>type of grounding</b>	grounding by snapping onto grounded DIN rails
<b>Electrical Safety</b>	
<b>protection class IP on the front according to IEC 60529</b>	IP20
<b>touch protection on the front according to IEC 60529</b>	finger-safe, for vertical contact from the front
<b>Ambient conditions</b>	
installation altitude at height above sea level maximum	1 000 m
<b>ambient temperature</b>	
● during operation	-25 ... +60 °C
● during storage	-55 ... +80 °C
<b>Electromagnetic compatibility</b>	
<b>conducted interference</b>	
● due to burst according to IEC 61000-4-4	2 kV / 5 kHz behavior criterion 2
● due to conductor-earth surge according to IEC 61000-4-5	2 kV behavior criterion 2
● due to conductor-conductor surge according to IEC 61000-4-5	1 kV behavior criterion 2
● due to high-frequency radiation according to IEC 61000-4-6	140 dBuV in the frequency range 0.15 ... 80 MHz, behavior criterion 1
<b>field-based interference according to IEC 61000-4-3</b>	80 MHz ... 1 GHz 10 V/m, behavior criterion 1
<b>electrostatic discharge according to IEC 61000-4-2</b>	4 kV contact discharging / 8 kV air discharging, behavior criterion 2
<b>conducted HF interference emissions according to CISPR11</b>	Class A for industrial environment
<b>field-bound HF interference emission according to CISPR11</b>	Class B for the domestic, business and commercial environments
<b>Short-circuit protection, design of the fuse link</b>	
manufacturer's article number	
● of gS fuse for semiconductor protection at NH design usable	<a href="#">3NE1814-0</a>
● of full range R fuse link for semiconductor protection at cylindrical design usable	<a href="#">5SE1325</a>
● of back-up R fuse link for semiconductor protection at NH design usable	<a href="#">3NE8814-0MK</a>
● of back-up R fuse link for semiconductor protection at cylindrical design 10 x 38 mm usable	<a href="#">3NC1032</a>
● of back-up R fuse link for semiconductor protection at cylindrical design 14 x 51 mm usable	<a href="#">3NC1450</a>
● of back-up R fuse link for semiconductor protection at cylindrical design 22 x 58 mm usable	<a href="#">3NC2263</a>
manufacturer's article number of the gG fuse	
● at NH design usable	<a href="#">3NA6807</a>
● at cylindrical design 10 x 38 mm usable	<a href="#">3NW6007-1</a>
● at cylindrical design 14 x 51 mm usable	<a href="#">3NW6105-1: These fuses have a smaller rated current than the semiconductor relays</a>
● at cylindrical design 22 x 58 mm usable	<a href="#">3NW6205-1: These fuses have a smaller rated current than the semiconductor relays</a>
manufacturer's article number	

- of DIAZED fuse usable
- of NEOZED fuse usable

[5SB2711](#)

[5SE2320](#)

### Approvals Certificates

Environment	General Product Approval	EMV	other
-------------	--------------------------	-----	-------

[Environmental Confirmations](#)



[Confirmation](#)



### Further information

#### Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

#### Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

#### Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

#### Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RF3320-2DA24>

#### Cax online generator


<https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RF3320-2DA24>



#### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RF3320-2DA24>

#### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[https://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RF3320-2DA24&lang=en](https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RF3320-2DA24&lang=en)

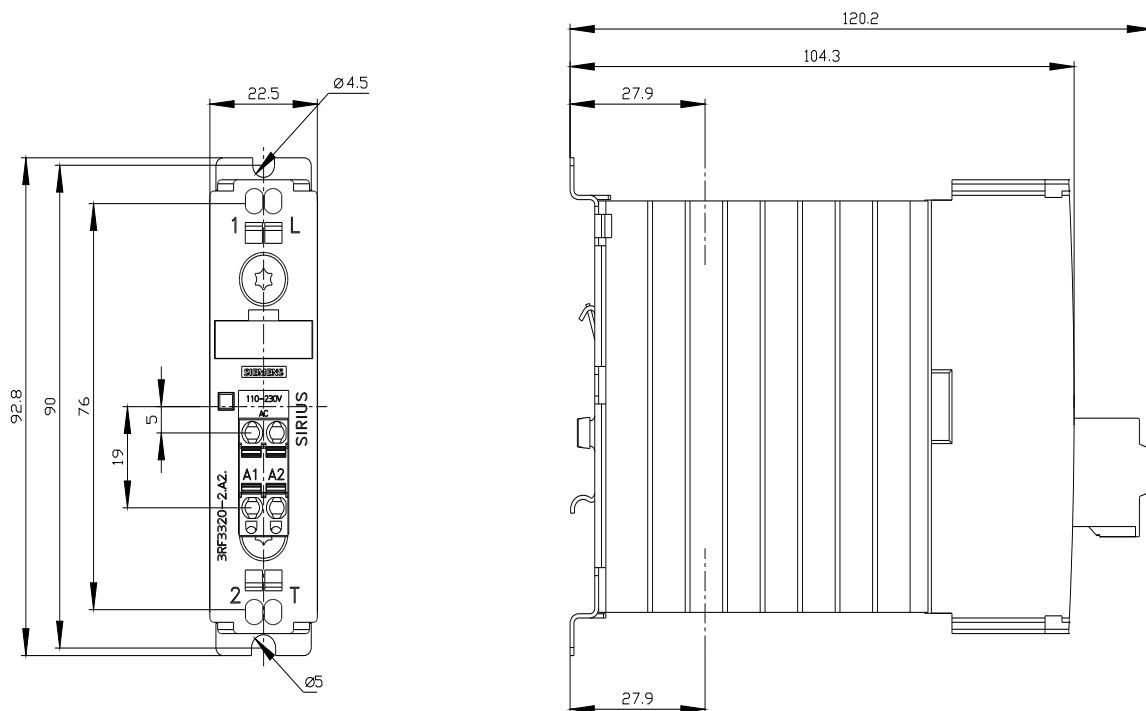

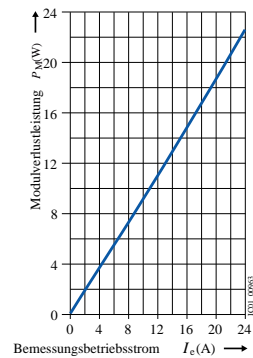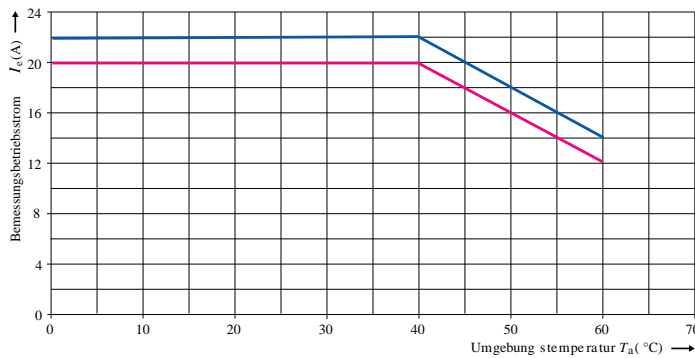

—  $I_c$  nach IEC 60947-4-3 bei Einzelauflistung  
—  $I_c$  nach IEC 60947-4-3 bei Dicht-an-Dicht-Montage

last modified:

1/22/2026