

CHANNEL
Smarter Safety

5-in-1



Tri- Function
At the flick of a switch



Emergency Exit Sign

The 5-in-1 features our Tri-Function 'at the flick of a switch' which allows the fitting to operated using Standard testing, Smart Test remote control, or Auto Self Test options.

With the 5-in-1 you will always have the correct mounting method.

The 5in1 is supplied with a full legend set and can be installed in both switchable maintained or non-maintained options.

Features

- Selectable manual/Smart Test or auto 'self test'
- Maintained / Non-maintained operation
- Supplied with pictogram pack
- Sleek and minimalistic design
- Polycarbonate construction
- Lightweight and easy to install
- Lithium LiFePo4 battery
 - Low environmental impact and running costs
 - Meets BS EN60598-1:2008 and other relevant standards
- 5 mounting options
 - Wall
 - Ceiling
 - Flag
 - Recessed
 - Suspended

Optional Remote Control

- Press once for 5 second monthly test
- Press twice for 3 hour yearly test
- LED confirms pass/fail status
- No need to remove/restore power

Viewing Distance: (meters)



30m

Note: Image not to scale and for pictorial reference only




www.channelsafety.co.uk

Tel: 0845 884 7000


Email: customerservices.lfs@deta.co.uk

Self-Test option carries out automatic testing: Monthly 10 Minute Test
Yearly 3-Hour Full Discharge Test

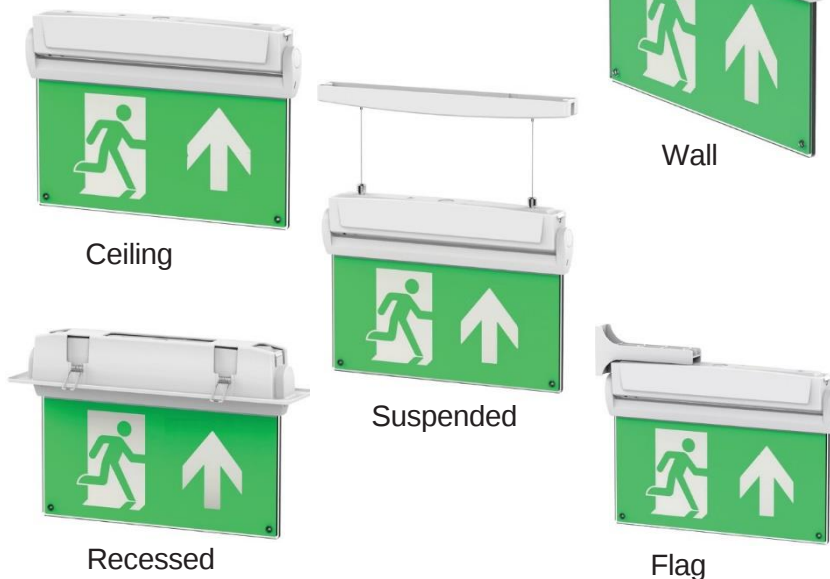

SPECIFICATIONS

Light Source	SMT LED 3W
IP Rating	IP20
Emergency Duration	3 hours (minimum)
Mains Voltage	230V 50Hz $\pm$ 10%
Mains Current	(max) 150mA (max) 35mA quiescent (3W)
Recharge Periods	Less than 24 hour
Charge Indicator	Integral green LED & red fault LED
Changeover Voltage	As per the requirements of BS EN 60598-2-22
Temperature Range	5°C to 40°C
Weight	800gm
Battery	LiFePO4 3.2V 1500mAh
Material & Finish	Polycarbonate construction, white finish
Size	344W x 237H X 42Dmm (Excludes brackets)

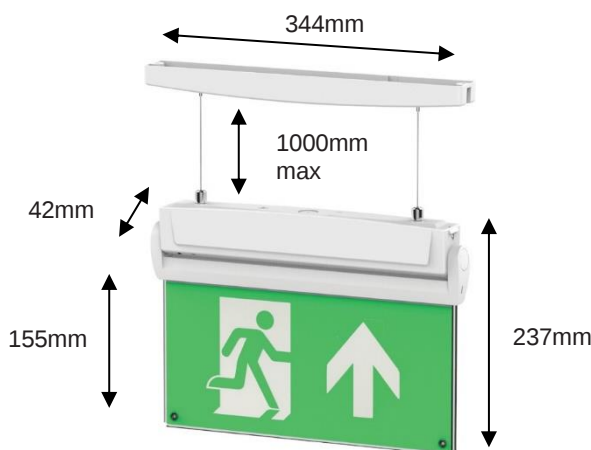

PRODUCT CODE	DESCRIPTION
E5IN12	5-in-1 LED exit sign c/w full legend set and five mounting option brackets
E/EM/RC	Remote control test unit (Optional)

Errors & omissions excepted. Specification is subject to change without notice.

Deta Electrical Company Ltd.

UK: Panattoni Park Luton Road Chalton Bedfordshire LU4 9TT UK
EU: Unit 16 Ashbourne Industrial Estate Ashbourne Co. Meath A84 W972
sales@deta.co.uk