

Product data sheet

Automation technology - Voltage and Power Supply




Product description	M12 Lead-through for control cabinet, Contacts: 4+PE, shielded, pluggable, IP67, UL 2238, M12x1.0, Rear mounting
Area	M12-K
Coding	K-coded
Series	824
Part no.	09 5290 10 05


Illustration



Scale drawing

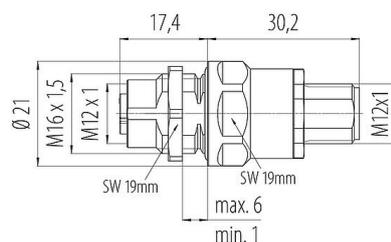

Contact arrangement (Plug-in side)



You can find the assembly instructions on the next page.

Technical data

General features

Part no.	09 5290 10 05
Connector design	Lead-through for control cabinet
Type standard	DIN EN IEC 61076-2-111:2018-10;VDE 0687-76-2-111:2018-10
Coding	K-coded
Version	Lead-through for control cabinets
Connector locking system	screw
Termination	pluggable
Degree of protection	IP67
Temperature range from/to	-40 °C / 85 °C
Mechanical operation	> 100 Mating cycles
Weight (g)	40.06
Customs tariff number	85369010
Country of Origin	DE

Electrical parameters

Rated voltage	630 V (600 V UL)
Rated impulse voltage	6000 V
Rated current	12.0 A
Pollution degree	3
Overvoltage category	II
Insulating material group	II
EMC compliance	shielded

Product data sheet

Automation technology - Voltage and Power Supply



Product description	M12 Lead-through for control cabinet, Contacts: 4+PE, shielded, pluggable, IP67, UL 2238, M12x1.0, Rear mounting
Area	M12-K
Coding	K-coded
Series	824
Part no.	09 5290 10 05

Material

Housing material	CuZn (Brass nickel plated)
Contact body material	PA black
Contact material	CuZn (brass)
Contact plating	Au (gold)
REACH SVHC	CAS 7439-92-1 (Lead)
SCIP number	ff566f35-f807-4851-ba64-e290dc0c42d0

Authorization/approvals

Approvals	UL 2238
-----------	---------

Classifications


ETIM 9.0	EC003569
----------	----------

Declarations of conformity

Low Voltage Directive	2014/35/EU (EN 60529:1991 2014/35/EU;EN 60204-1:2018)
-----------------------	---------------------------------------------------------

Assembly instructions / Panel cut-out

Lead-through for control cabinet with bore hole

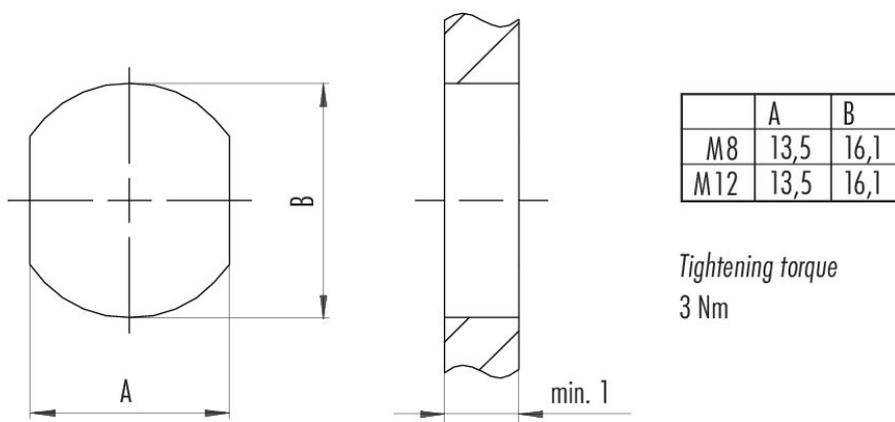

Product data sheet


Automation technology - Voltage and Power Supply



Product description **M12 Lead-through for control cabinet, Contacts: 4+PE, shielded, pluggable, IP67, UL 2238, M12x1.0, Rear mounting**

Area **M12-K**
Coding **K-coded**
Series **824**
Part no. **09 5290 10 05**

Derating curve

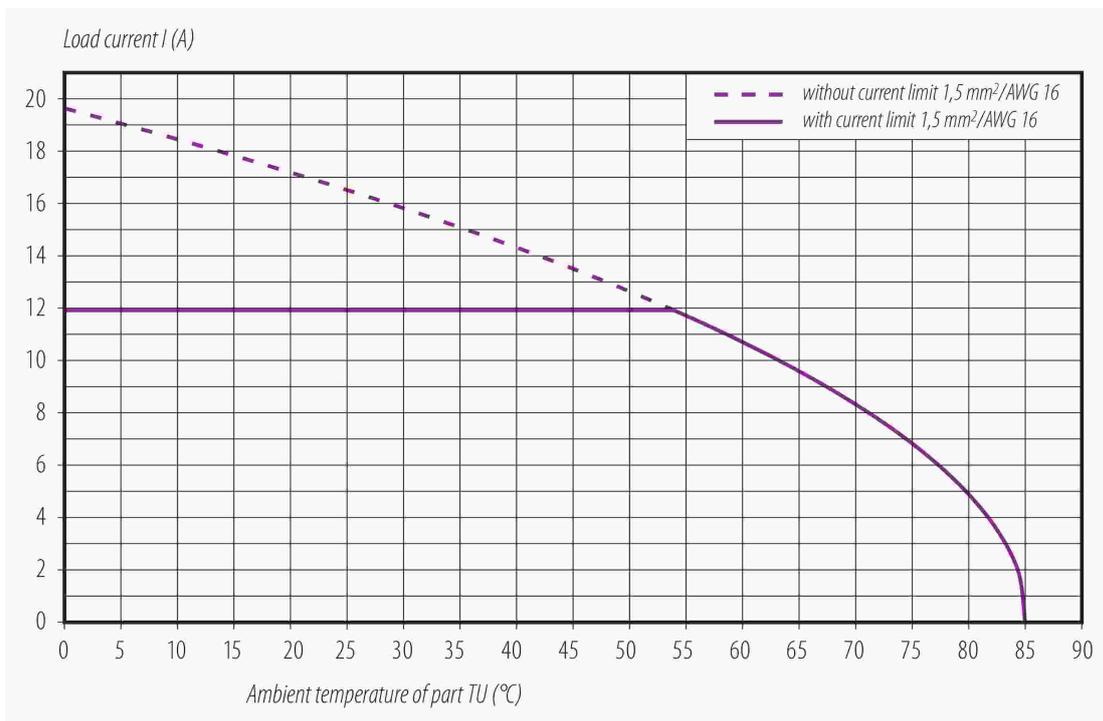


Product data sheet

Automation technology - Voltage and Power Supply



Product description	M12 Lead-through for control cabinet, Contacts: 4+PE, shielded, pluggable, IP67, UL 2238, M12x1.0, Rear mounting
Area	M12-K
Coding	K-coded
Series	824
Part no.	09 5290 10 05

Derating curve

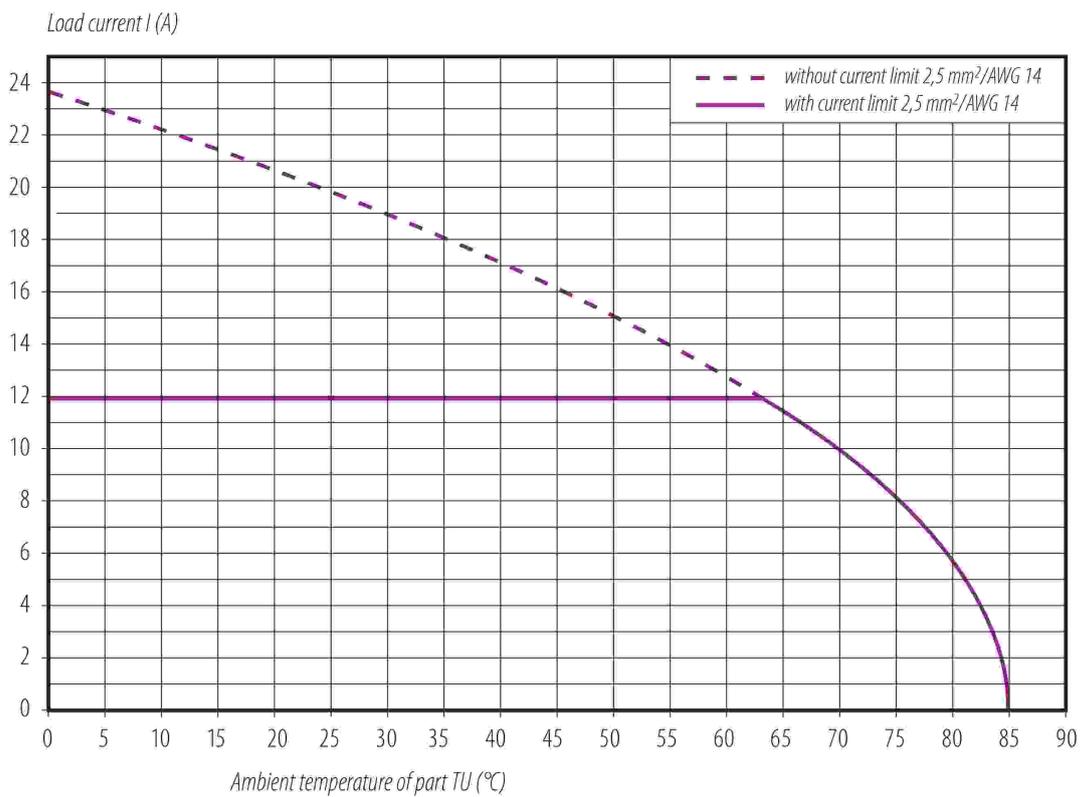

Product description	M12 Lead-through for control cabinet, Contacts: 4+PE, shielded, pluggable, IP67, UL 2238, M12x1.0, Rear mounting
Area	M12-K
Coding	K-coded
Series	824
Part no.	09 5290 10 05

General Disclaim Notice

The connector must not be plugged or unplugged under load. Non-observance and improper use can result in personal injury.

The connectors have been developed for applications in plant engineering, control and electrical equipment construction. The user is responsible for checking whether the connectors can also be used in other areas of application.

Connectors which are used in circuits with voltages dangerous to the touch may only be installed and used by, or under the supervision of, persons with electrical engineering training, taking into account the applicable regulations and standards.

The user must take suitable safety precautions to ensure that the connector cannot be accidentally disconnected.

Plug connectors with enclosure protection IP67 and IP68 are not suitable for use under water. When used outdoors, the plug connectors must be protected separately against corrosion. For further information on the IP protection classes, please refer to the "Technical Information" download centre.

Please observe the pollution degree and the overvoltage category. For further information, please refer to the download center "Technical Information".

To lock the cable connector with the device connector, the threaded ring is tightened "hand-tight" (approx. 60 cNm).

In the case of cable connectors with a metal threaded ring, it is imperative to ensure a connection with the PE protective contact of the appliance connector. Connecting cables between appliance connectors that are not connected to the PE contact are not permitted. The user must ensure a continuous connection of the protective earth conductor.