

## LPQ250 Series

250 Watts

### Data Sheet


**Total Power: 250 Watts**  
**Input Voltage: 85-264 Vac**  
**120 - 300 Vdc**  
**# of Outputs: Quad**

### SPECIAL FEATURES

- Active power factor correction
- IEC EN61000-3-2 compliance
- Remote sense on main output
- Power fail and remote inhibit
- Single wire current sharing
- Built-in EMI filter
- Adjustable floating 4th output
- 2 Supervisory outputs 5 V and 12 V
- Overvoltage protection
- Overload protection
- Thermal overload protection
- DC power good
- 120 KHz switching frequency
- Cover -C
- Optional with fan cover -CF
- Optional end fan cover -CEF

### SAFETY

- VDE 0805/EN60950 (IEC950)  
11774-3336-1262
- UL UL1950 EI32002
- CSA CSA 22.2-234 Level 5  
LR53982C
- NEMKO EN 60950/EMKO-TUE  
P95102999 (74-sec) 203
- CB Certificate & report 2186
- CE Mark (LVD)

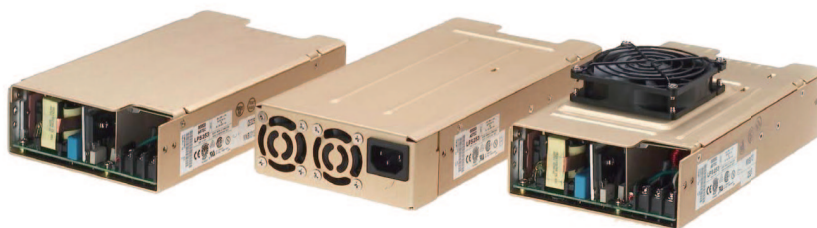

### Electrical Specifications

Input	
Input range:	85-264 VAC; 120-300 VDC
Frequency:	47-440 Hz
Inrush current:	20 A max, cold start @ 25 °C
Efficiency:	75% typical at full load
EMI filter:	FCC Class B conducted and radiated CISPR 22 Class B conducted and radiated EN55022 Class B conducted and radiated VDE 0878 PT3 Class B conducted and radiated
Safety ground leakage current:	< 0.5 mA @ 50/60 Hz, 264 VAC input
Output	
Maximum power:	With cover: 250 W with 30 CFM forced air. (-C) (-CF) (CEF)
Adjustment range:	± 5% min. on main: 5-25 V on 4th output
Standby outputs:	5 V @ 100 mA regulated, 12 V @ 500 mA
Hold-up time:	16 ms @ 250 W load, 115 VAC nominal line
Overload protection:	Short circuit protection on all outputs. Case overload protected @ 110-145% above peak rating
Overvoltage protection:	5 V output: 5.7 to 6.7 VDC. Other models 10% to 25% above nominal output

## Logic Control

Power fail:	TTL Logic signal goes high 50-150 msec after 5 V output. It goes low at least 4 ms before loss of regulation
Remote on/off:	Requires an external contact (N.O or N.C) to inhibit outputs
DC-OK:	TTL logic goes high 50-150 msec after the output. It goes low when there is loss of regulation.
Remote sense:	Compensates for 0.5 V lead drop minimum, will operate without remote sense connected. Reverse connection protected

## Environmental Specifications

Operating temperature:	0° to 50 °C ambient; derate each output at 2.5% per degree from 50° to 70 °C
Storage temperature:	-40 °C to +85 °C
Temperature coefficient:	± 0.4% per °C
Electromagnetic susceptibility:	Designed to meet IEC 801, -2, -3, -4, -5, -6, Level 3
Humidity:	Operating; non-condensing 5% to 95%
Vibration:	Three orthogonal axes, sweep at 1 oct/min, 5 min. dwell at four major resonances 0.7 G peak 5 Hz to 500 Hz, operational
MTBF demonstrated:	> 550,000 hours at full load and 25 °C ambient conditions


## Ordering Information

Model Number	Output Voltage	Minimun Load	Maximum Load with 30CFM Forced Air	Peak Load <sup>1</sup>	Regulation <sup>2</sup>	Ripple P/P(PARD) <sup>3</sup>
LPQ252-C	+5 V	3 A	35 A	40 A	±2%	50 mV
	+12 V	0 A	10 A	12 A	±3%	120 mV
	-12 V	0 A	6 A	8 A	±3%	120 mV
	± 5 - 25 V	0 A	6 A	8 A	±3%	240 mV max.
LPQ253-C	+5 V	3 A	35 A	40 A	±2%	50 mV
	+15 V	0 A	10 A	12 A	±3%	150 mV
	-15 V	0 A	6 A	8 A	±3%	150 mV
	± 5 - 25 V	0 A	6 A	8 A	±3%	240 mV max.

1. Peak current lasting < 30 seconds with a maximum 10% duty cycle.
2. At 25 °C including initial tolerance, line voltage, load currents and output voltages adjusted to factory settings.
3. Peak-to-peak with 20 MHz bandwidth and 10 µF in parallel with a 0.1 µF capacitor at rated line voltage and load ranges.
4. 4th output 5 - 25 V factory set at 5 V.
5. Minimum Load is required.
6. If optional CF or CEF fans are not used, 30CFM forced air cooling needs to be provided and is required through the length of the power supply. Not convection rated.

Notes: -CF suffix added to the model number indicates cover with top fan. -CEF suffix added to the model number indicates cover with dual end mounted fan cover and AC inlet.

## Mechanical Drawing

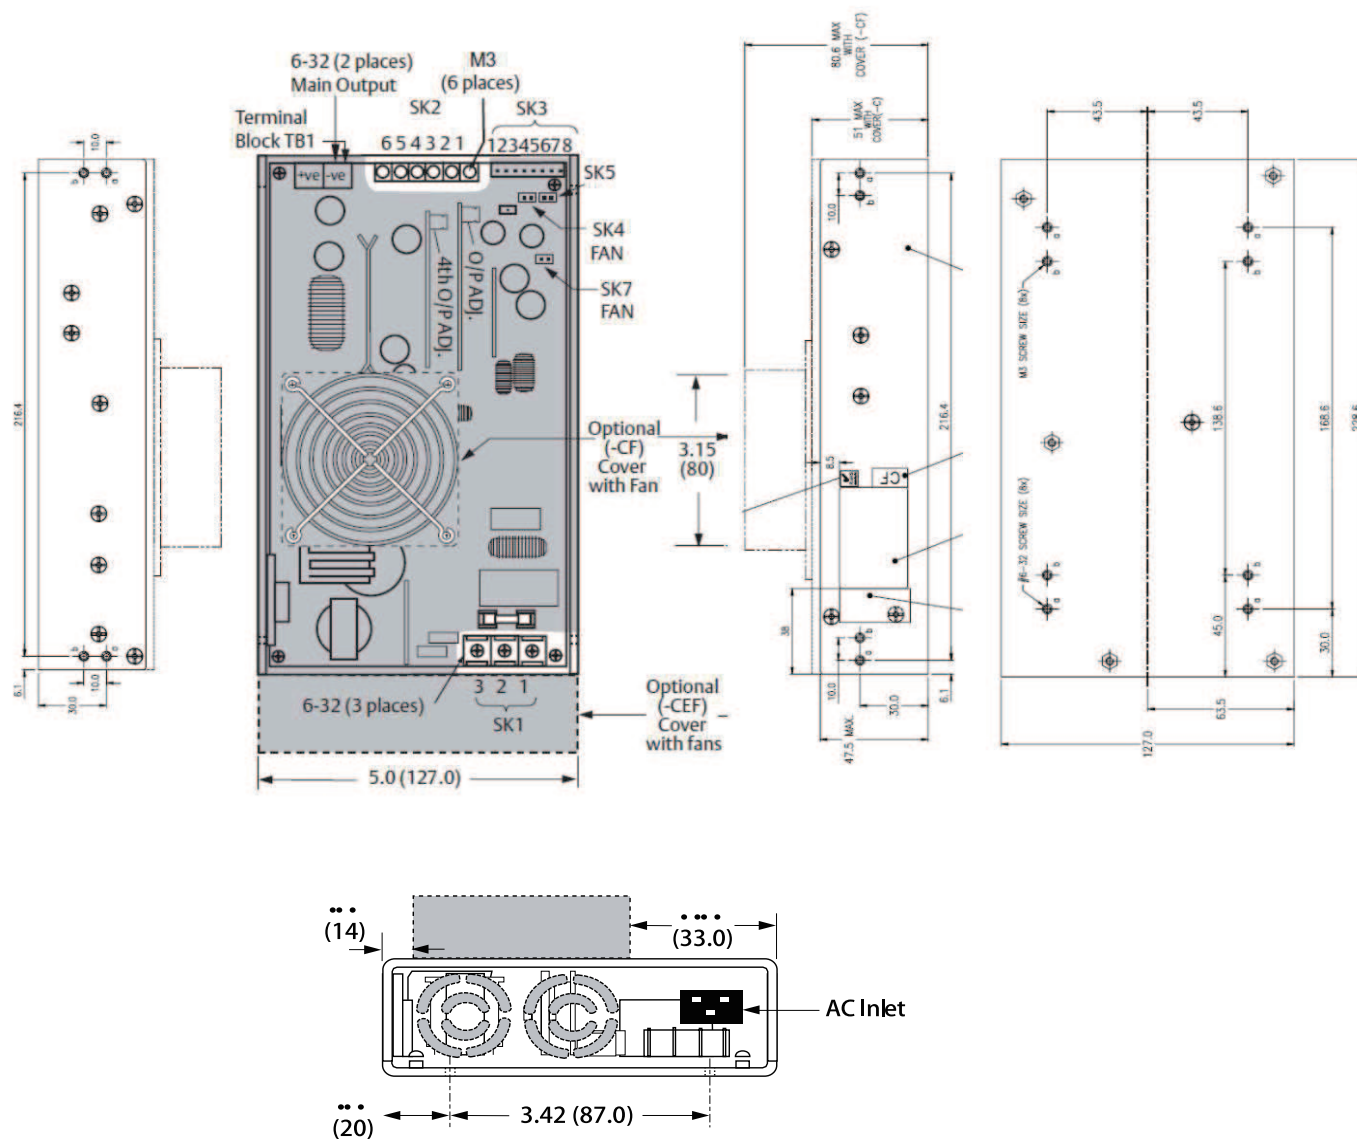

1. Specifications subject to change without notice.
2. All dimensions in inches (mm), tolerance is  $\pm 0.02$ " ( $\pm 0.5$ mm)
3. Specifications are at factory settings.
4. To enable normally closed remote inhibit, cut jumper J1.
5. Mounting maximum insertion depth is 0.12".
6. Warranty: 2 years
7. Weight: 3.1 lb/1.41 kg

## Pin Assignments

Connector		
<b>SK1</b>	PIN 1	Neutral
	PIN 2	Line
	PIN 3	Ground
<b>SK2</b>	PIN 1	+ 12/15V
	PIN 2	Common
	PIN 3	Common
	PIN 4	- 12/15 V
	PIN 5	5-25 V RET Float
	PIN 6	5-25 V Float
<b>SK3</b>	PIN 1	+ Remote sense
	PIN 2	- Remote sense
	PIN 3	Remote inhibit (N.O.)
	PIN 4	Remote inhibit (N.C.)
	PIN 5	Common
	PIN 6	Current sharing
	PIN 7	Power Fail
	PIN 8	DC Power Good
<b>SK4</b>	PIN 1	+ Fan's power source (12 V @ 500 mA)
	PIN 2	- Fan's power source (12 V @ 500 mA)
<b>SK5</b>	PIN 1	+ Supervisory output supply (5 V @ 100 mA)
	PIN 2	- Supervisory output supply (5 V @ 100 mA)
<b>SK7</b>	PIN 1	+ Fan's power source (12 V @ 500 mA)
	PIN 2	- Fan's power source (12 V @ 500 mA)

## MatingConnectors

<b>SK3</b>	Molex 22-01-1084 PINS: 08-70-0057
<b>SK4</b>	Molex 22-01-3027 PINS: 08-50-0114
<b>SK5</b>	Molex 22-01-3027 PINS: 08-50-0114
<b>SK7</b>	Molex 22-01-3027 PINS: 08-50-0114
Artesyn Embedded Technologies Connector Kit #70-841-005, includes all of the above.	

## WORLDWIDE OFFICES

### Americas

2900 S.Diablo Way  
Tempe, AZ 85282  
USA  
+1 888 412 7832

### Europe (UK)

Waterfront Business Park  
Merry Hill, Dudley  
West Midlands, DY5 1LX  
United Kingdom  
+44 (0) 1384 842 211

### Asia (HK)

14/F, Lu Plaza  
2 Wing Yip Street  
Kwun Tong, Kowloon  
Hong Kong  
+852 2176 3333

**ARTESYN**<sup>TM</sup>  
EMBEDDED TECHNOLOGIES

[www.artesyn.com](http://www.artesyn.com)

While every precaution has been taken to ensure accuracy and completeness in this literature, Artesyn Embedded Technologies assumes no responsibility, and disclaims all liability for damages resulting from use of this information or for any errors or omissions. Artesyn Embedded Technologies, Artesyn and the Artesyn Embedded Technologies logo are trademarks and service marks of Artesyn Embedded Technologies, Inc. All other names and logos referred to are trade names, trademarks, or registered trademarks of their respective owners.  
© 2014 Artesyn Embedded Technologies, Inc.

For more information: [www.artesyn.com/power](http://www.artesyn.com/power)  
For support: [productsupport.ep@artesyn.com](mailto:productsupport.ep@artesyn.com)

LPQ250 Series-DS 06.03.14