

1607226

https://www.phoenixcontact.com/gb/products/1607226

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.

Contact insert set for sleeve side, sleeve frame with PE, 4 fixing screws, 6-pos. contact inserts preassembled, 6 coding profiles



Your advantages

- Proven COMBICON technology
- · Universal connection
- · Can be keyed to prevent incorrect connection

Commercial data

Item number	1607226
Packing unit	5 pc
Minimum order quantity	5 pc
Sales key	ABLADA
Product key	ABLADA
Catalog page	Page 32 (C-2-2013)
GTIN	4017918940980
Weight per piece (including packing)	49.76 g
Weight per piece (excluding packing)	48.38 g
Customs tariff number	85366990
Country of origin	PL



1607226

https://www.phoenixcontact.com/gb/products/1607226

Technical data

Notes

Safety note

Safety note

WARNING: The connectors may not be plugged in or disconnected under load. Ignoring the warning or improper use may damage persons and/or property.

- WARNING: Commission properly functioning products only. The products must be regularly inspected for damage. Decommission defective products immediately. Replace damaged products. Repairs are not possible.
- WARNING: Only electrically qualified personnel may install and operate the product. They must observe the following safety notes. The qualified personnel must be familiar with the basics of electrical engineering. They must be able to recognize and prevent danger. The relevant symbol on the packaging indicates that only personnel familiar with electrical engineering are allowed to install and operate the product.
- The products are suitable for applications in plant, controller, and electrical device engineering.
- When operating the connectors in outdoor applications, they must be separately protected against environmental influences.
- Assembled products may not be manipulated or improperly opened.
- Only use mating connectors that are specified in the technical data of the standards listed (e.g. the ones listed in the product accessories online at phoenixcontact.com/products).
- When using the product in direct connection with third-party manufacturers, the user is responsible.
- For operating voltages > 50 V AC, conductive connector housings must be grounded
- Ensure that the protective or functional ground has been properly connected.
- VDE 0100/1.97 § 411.1.3.2 and DIN EN 60 204/11.98 § 14.1.3 are applicable when combining several circuits in a cable and/or connector
- Observe the corresponding technical data. You will find information:
- o On the product
- o On the packing label
- o In the supplied documentation
- o Online at phoenixcontact.com/products under the product
- Only use tools recommended by Phoenix Contact
- The installation notes/Design In documents online on the download page at phoenixcontact.com/products must be observed for this product.
- Use a protective cap to protect connectors that are not in use. The suitable accessories are available online in the accessory section of the product at phoenixcontact.com/products
- Operate the connector only when it is fully plugged in.
- Ensure that when laying the cable, the tensile load on the connectors does not exceed the upper limit specified in the



1607226

https://www.phoenixcontact.com/gb/products/1607226

	standards.
	Observe the minimum bending radius of the cable. Lay the cable without twisting it.
	 The connector warms up in normal operation. Depending on the ambient conditions, the surface of the connector can continue to warm up. In this case, the user is responsible for posting warnings (e.g. DIN EN ISO 13732-1:2008-12).
oduct properties	
Product type	Contact insert
Product family	VARIOCON
Series	VC-D
Туре	VC4
Number of positions	30
Connection profile	29+PE
Number of module slots	5
Insulation characteristics	
Degree of pollution	3
ectrical properties	
Rated voltage (II/2)	630 V
Rated voltage (III/2)	320 V
Rated voltage (III/3)	250 V
	250 V
Nominal voltage ATD	250
Rated surge voltage	4 kV
Rated surge voltage (III/3)	4 kV
Rated surge voltage	4 kV
Rated current	10 A
	10 A
N	10 A
Nominal voltage U _N	250 V
Nominal current I _N	10 A
onnection data	
Tightening torque	0.22 0.25 Nm
Conductor cross section flexible	0.14 mm² 0.75 mm²
Conductor cross section rigid	0.14 mm² 1.5 mm²
mensions	
Dimensional drawing	
Difficiolotial drawing	95,2



1607226

https://www.phoenixcontact.com/gb/products/1607226

Ambient conditions

Ambient temperature (operation)

	Width	95.2 mm
	Height	27.5 mm
	Length	41.9 mm
Ла	terial specifications	
	Color of the housing part	black
	Material Housing	Polyamide
	Material	Polyamide (Sleeve frame)
	Material Contact carrier	PA
	Material Contact	CuZn
	Flammability rating according to UL 94	V0
	Insulating material group	I / CTI 600
	Contact surface material	tin-plated
	Material for screw connection	Stainless steel
al	ple/line	
	Stripping length of the individual wire	7 mm
	chanical properties	
Ν	lechanical data	
	Insertion/withdrawal cycles	≥ 100

-40 °C ... 100 °C




1607226


https://www.phoenixcontact.com/gb/products/1607226

Drawings

Dimensional drawing

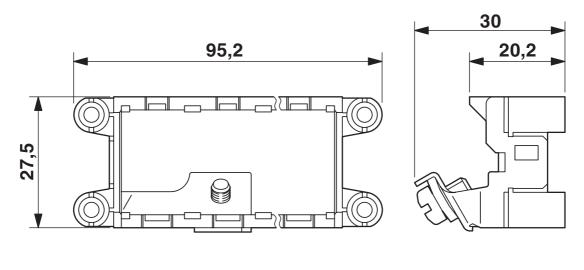

Functional drawing

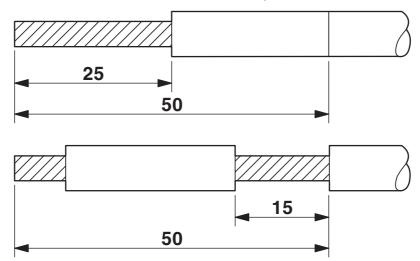



1607226

https://www.phoenixcontact.com/gb/products/1607226

Classifications

	ECLASS-13.0	27440192				
ETIM						
	ETIM 9.0	EC003557				
UNSPSC						
	UNSPSC 21.0	39121400				



1607226

https://www.phoenixcontact.com/gb/products/1607226

Environmental product compliance

EU RoHS

20 1.01.0	
Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

Phoenix Contact 2025 @ - all rights reserved https://www.phoenixcontact.com

PHOENIX CONTACT Ltd Halesfield 13, Telford Shropshire, TF7 4PG 01952 681700 info@phoenixcontact.co.uk