


HZ154 Probe 1:1/10:1



Attenuation ratio:	1:1
Switchable:	10:1
Bandwidth:	10/100MHz
Rise time :	<35/3.5ns
Input impedance:	1/10MQ 82/12pF
Max. Voltage:	(10:1) 600V (DC + peak AC)
LF compensation:	1 Trimmer at 10:1
RF compensation:	2 Trimmer at 10:1
Cable length:	1.2m
Measuring category:	CAT I

HZ355 Probe 10:1

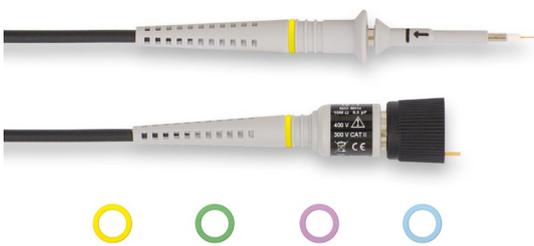

Attenuation ratio:	10:1
Bandwidth:	500MHz
Rise time:	<700ps
Input impedance:	10MQ 9.5pF
Max. Voltage:	400V (DC + peak AC)
LF compensation:	1 Trimmer
RF compensation:	2 Trimmer
Cable length:	1.3m
Probe factor identification:	automatically after plugging
Measuring category:	CAT I

HZ350 Probe 10:1



Attenuation ratio:	10:1
Bandwidth:	350MHz
Rise time:	<1.0ns
Input impedance:	10MQ 12pF
Max. Voltage:	400V (DC + peak AC)
LF compensation:	1 Trimmer
RF compensation:	2 Trimmer
Cable length:	1.2m
Probe factor identification:	automatically after plugging
Measuring category:	CAT I

HZ200 Probe 10:1



Attenuation ratio:	10:1
Bandwidth:	250MHz
Rise time:	<1.4ns
Input impedance:	10MQ 12pF
Max. Voltage:	400V (DC + peak AC)
LF compensation:	1 Trimmer
RF compensation:	2 Trimmer
Cable length:	1.2m
Probe factor identification:	automatically after plugging
Measuring category:	CAT I

HZ51 Probe 10:1



Attenuation ratio:	10:1
Bandwidth:	150MHz
Rise time:	<2.4ns
Input impedance:	10MQ 12pF
Max. Voltage:	600V (DC + peak AC)
LF compensation:	1 Trimmer
RF compensation:	1 Trimmer
Cable length:	1.2m
Measuring category:	CAT I

HZ52 Probe 10:1



Attenuation ratio:	10:1
Bandwidth:	250MHz
Rise time:	<1.4ns
Input impedance:	10MΩ 10pF
Max. Voltage:	600V (DC + peak AC)
LF compensation:	1 Trimmer
RF compensation:	2 Trimmer
Cable length:	1.2m
Measuring category:	CAT I

HZ53 Probe 100:1



Attenuation ratio:	100:1
Bandwidth:	100MHz
Rise time:	<3.5ns
Input impedance:	100MΩ 4.5pF
Max. Voltage:	1200V (DC + peak AC)
LF compensation:	1 Trimmer
Cable length:	1.2m
Measuring category:	CAT I

HZ020 Probe 1000:1



Attenuation ratio:	1000:1
Bandwidth:	400MHz
Rise time:	<900ps
Input impedance:	50MΩ 7.5pF
Max. Voltage:	1000V _{rms}
LF compensation:	1 Trimmer
RF compensation:	1 Trimmer
Cable length:	1.3m
Probe factor identification:	automatically after plugging
Measuring category:	CAT II

HZ030 Probe 10:1



Attenuation ratio:	10:1
Bandwidth:	1GHz
Rise time:	600ps
Input impedance:	1MΩ 0.9pF
Max. Input Voltage:	20V
Input Dynamic Range:	±8V
Cable length:	1.3m
Oscilloscope Input Coupling:	50Ω

HZ010 10:1 250MHz Probe



Attenuation ratio:	10:1
Bandwidth:	250 MHz
Rise time:	<1.4 ns
Input impedance:	10 MΩ 15 pF
Max. Voltage:	400V (DC + peak AC)
Measuring category:	CAT I

HZ100 Differential Probe 20:1/200:1

Technical specifications at 23°C ±2°C



Differential input voltage (DC + peak AC) max.:	±700V
Max. input voltage per input:	600V _{rms}
Attenuation ratio:	20:1
Switchable:	200:1
Bandwidth:	30/40MHz
Rise time:	12/9ns
Input impedance:	8MΩ 1.2pF
Output impedance:	50Ω
Max. output Voltage:	±3.5V at 1MΩ
Max. noise:	2mV
Accuracy after 1 min:	±3% (18...30°C)
Common mode rejection DC/AC 1MHz:	70dB/>50dB
Inputs (CAT III):	2 safety connectors
Input leads:	2 test leads 50cm with spring hooks
Battery operation:	9V battery 6LR61
Input for an external power supply:	12...14V _{dc} /30mA

HZ109 Differential Probe 1:1/10:1

Technical specifications at 23°C ±2°C



Differential input voltage (DC + peak AC) max.:	±3,5V/35V
Max. input voltage per input:	100V _{rms}
Attenuation ratio:	1:1
Switchable:	10:1
Bandwidth:	30/40MHz
Rise time:	12/9ns
Input impedance:	8MΩ 1.2pF
Output impedance:	50Ω
Max. output Voltage:	±3.5V at 1MΩ
Max. background noise	at x1: <8mV _{rms} at x10: <2mV _{rms}
Accuracy after 1 min:	±3% (18...30°C)
Common mode rejection DC/AC 1MHz:	70dB/>50dB
Inputs (CAT III):	2 safety connectors
Input leads:	2 test leads 50cm with spring hooks
Battery operation:	9V battery 6LR61
Input for an external power supply:	12...14V _{dc} /30mA

HZ115 Differential Probe 100:1/1000:1

Technical specifications at 23°C ±2°C



Differential input voltage (AC _{rms}):	1000V
(DC + peak AC) max.:	±1400V*)
Max. input voltage per input:	±1400V*)
Attenuation ratio:	100:1
Switchable:	1000:1
Bandwidth:	20/30MHz
Rise time:	17/12ns
Input impedance:	60MΩ 1.5pF
Output impedance:	50Ω
Max. output Voltage:	±1.5V at 1MΩ
Max. background noise:	2mV
Accuracy after 1 min:	±3% (18...30°C)
Common mode rejection DC/AC 1MHz:	70dB/>50dB
Inputs (CAT III):	2 safety connectors
Input leads:	2 test leads 75cm with safety test clips
Battery operation:	9V battery 6LR61
Input for an external power supply:	12...14V _{dc} /30mA

*) due to test clip 1000V CAT III