

AC servo motor BSH - 0.7 N.m - 8000 rpm - untapped shaft - without brake - IP50

BSH0701T01A1A

EAN Code: 3389118135864

Main

Device short name	BSH							
Product or component type	Servo motor							
Maximum mechanical speed	8000 rpm							
Continuous stall torque	1.3 N.m for LXM32.U90M2 at 3 A, 230 V, single phase							
	1.4 N.m for LXM05AD10M3X, 200240 V, three phase							
	1.4 N.m for LXM05BD10M3X, 200240 V, three phase							
	1.4 N.m for LXM05CD10M3X at 6 A, 200240 V, three phase							
	1.4 N.m for LXM15LD13M3, 230 V, single phase							
	1.4 N.m for LXM05AD10F1, 110120 V, single phase							
	1.4 N.m for LXM05AD17M2, 200240 V, single phase							
	1.4 N.m for LXM05BD10F1, 110120 V, single phase							
	1.4 N.m for LXM05BD17M2, 200240 V, single phase							
	1.4 N.m for LXM05CD10F1, 110120 V, single phase							
	1.4 N.m for LXM05CD17M2, 200240 V, single phase							
	1.4 N.m for LXM32.D18M2 at 6 A, 115 V, single phase							
	0.7 N.m for LXM15LU60N4, 400 V, three phase							
	0.7 N.m for LXM15LU60N4, 480 V, three phase							
	0.91 N.m for LXM15LU60N4, 230 V, three phase							
	1.4 N.m for LXM15LD10N4, 230 V, three phase							
	1.4 N.m for LXM15LD10N4, 400 V, three phase							
	1.4 N.m for LXM15LD10N4, 480 V, three phase							
	1.4 N.m for LXM15LD13M3, 230 V, three phase							
	1.4 N.m for LXM15LD21M3, 230 V, three phase							
	1.4 N.m for LXM05AD17M3X, 200240 V, three phase 1.4 N.m for LXM05BD17M3X, 200240 V, three phase							
	1.4 N.m for LXM05DD17M3X, 200240 V, three phase							
Peak stall torque	3.5 N.m for LXM32.U90M2 at 3 A, 230 V, single phase							
	3.19 N.m for LXM15LD13M3, 230 V, single phase							
	2.42 N.m for LXM05AD10F1, 110120 V, single phase							
	3.19 N.m for LXM05AD17M2, 200240 V, single phase							
	2.42 N.m for LXM05BD10F1, 110120 V, single phase							
	3.19 N.m for LXM05BD17M2, 200240 V, single phase							
	2.42 N.m for LXM05CD10F1, 110120 V, single phase							
	3.19 N.m for LXM05CD17M2, 200240 V, single phase							
	3.5 N.m for LXM32.D18M2 at 6 A, 115 V, single phase							
	1.9 N.m for LXM15LU60N4, 400 V, three phase							
	1.9 N.m for LXM15LU60N4, 480 V, three phase							
	1.9 N.m for LXM15LU60N4, 230 V, three phase							
	2.91 N.m for LXM15LD10N4, 230 V, three phase							
	2.91 N.m for LXM15LD10N4, 400 V, three phase							
	2.91 N.m for LXM15LD10N4, 480 V, three phase							
	3.19 N.m for LXM15LD13M3, 230 V, three phase 3.19 N.m for LXM15LD21M3, 230 V, three phase							
	2.42 N.m for LXM05AD10M3X, 200240 V, three phase							
	3.19 N.m for LXM05AD10M3X, 200240 V, three phase							
	2.42 N.m for LXM05BD10M3X, 200240 V, three phase							
	3.19 N.m for LXM05BD17M3X, 200240 V, three phase							
	2.42 N.m for LXM05CD10M3X, 200240 V, three phase							
	3.19 N.m for LXM05CD17M3X at 6 A, 200240 V, three phase							
	2							

Nominal output power

500 W for LXM32.U90M2 at 3 A, 230 V, single phase 350 W for LXM32.D18M2 at 6 A, 115 V, single phase 400 W for LXM05AD10M3X, 200...240 V, three phase 400 W for LXM05BD10M3X, 200...240 V, three phase 400 W for LXM05CD10M3X, 200...240 V, three phase 380 W for LXM05AD10F1, 110...120 V, single phase 380 W for LXM05BD10F1, 110...120 V, single phase 380 W for LXM05CD10F1, 110...120 V, single phase 400 W for LXM05AD17M2, 200...240 V, single phase 400 W for LXM05BD17M2, 200...240 V, single phase 400 W for LXM05CD17M2, 200...240 V, single phase 654 W for LXM15LD13M3 at 6 A, 230 V, single phase 1000 W for LXM15LD10N4, 400 V, three phase 1000 W for LXM15LD10N4, 480 V, three phase 400 W for LXM05AD17M3X, 200...240 V, three phase 400 W for LXM05BD17M3X, 200...240 V, three phase 400 W for LXM05CD17M3X 200 240 V three phase 440 W for LXM15LU60N4, 230 V, three phase 564 W for LXM15LD10N4, 230 V, three phase 586 W for LXM15LU60N4, 400 V, three phase 586 W for LXM15LU60N4, 480 V, three phase 654 W for LXM15LD13M3, 230 V, three phase 654 W for LXM15LD21M3, 230 V, three phase

Nominal torque

0.94 N.m for LXM32.U90M2 at 3 A, 230 V, single phase 1.25 N.m for LXM15LD13M3, 230 V, single phase 1.36 N.m for LXM32.D18M2 at 6 A, 115 V, single phase 0.7 N.m for LXM15LU60N4, 230 V, three phase 0.7 N.m for LXM15LU60N4 at 6 A, 400 V, three phase 0.7 N.m for LXM15LU60N4, 480 V, three phase 1.23 N.m for LXM15LD10N4, 400 V, three phase 1.23 N.m for LXM15LD10N4, 400 V, three phase 1.25 N.m for LXM15LD10N4, 230 V, three phase 1.25 N.m for LXM15LD10N4, 230 V, three phase 1.25 N.m for LXM15LD13M3, 230 V, three phase 1.25 N.m for LXM15LD21M3, 230 V, three phase 1.25 N.m for LXM15LD21M3, 230 V, three phase

Nominal speed

5000 rpm for LXM32.U90M2 at 3 A, 230 V, single phase 3000 rpm for LXM05AD10F1, 110...120 V, single phase 3000 rpm for LXM05BD10F1, 110...120 V, single phase 3000 rpm for LXM05CD10F1, 110...120 V, single phase 3000 rpm for LXM05AD10M3X, 200...240 V, three phase 3000 rpm for LXM05BD10M3X, 200...240 V, three phase 3000 rpm for LXM05CD10M3X, 200...240 V, three phase 8000 rpm for LXM15LD10N4 at 6 A, 400 V, three phase 3000 rpm for LXM05AD17M2, 200...240 V, single phase 3000 rpm for LXM05BD17M2, 200...240 V, single phase 3000 rpm for LXM05CD17M2, 200...240 V, single phase 3000 rpm for LXM05AD17M3X, 200...240 V, three phase 3000 rpm for LXM05BD17M3X, 200...240 V, three phase 3000 rpm for LXM05CD17M3X, 200...240 V, three phase 5000 rpm for LXM15LD13M3, 230 V, single phase 2500 rpm for LXM32.D18M2 at 6 A, 115 V, single phase 5000 rpm for LXM15LD10N4, 230 V, three phase 5000 rpm for LXM15LD13M3, 230 V, three phase 5000 rpm for LXM15LD21M3, 230 V, three phase 6000 rpm for LXM15LU60N4, 230 V, three phase 8000 rpm for LXM15LD10N4, 480 V, three phase 8000 rpm for LXM15LU60N4, 400 V, three phase 8000 rpm for LXM15LU60N4, 480 V, three phase

Product compatibility	LXM05AD10F1 at 110120 V single phase
	LXM05AD17M2 at 200240 V single phase
	LXM05BD10F1 at 110120 V single phase
	LXM05BD17M2 at 200240 V single phase
	LXM05CD10F1 at 110120 V single phase
	LXM05CD17M2 at 200240 V single phase
	LXM15LD13M3 at 230 V single phase
	LXM32.U90M2 at 230 V single phase
	LXM32.D18M2 at 115 V single phase
	LXM15LU60N4 at 230 V three phase
	LXM05AD10M3X at 200240 V three phase
	LXM05BD10M3X at 200240 V three phase
	LXM05CD10M3X at 200240 V three phase
	LXM15LD13M3 at 230 V three phase
	LXM15LU60N4 at 400 V three phase
	LXM15LU60N4 at 480 V three phase
	LXM15LD10N4 at 400 V three phase
	LXM05AD17M3X at 200240 V three phase
	LXM05BD17M3X at 200240 V three phase
	LXM05CD17M3X at 200240 V three phase
	LXM15LD10N4 at 230 V three phase
	LXM15LD10N4 at 480 V three phase
	LXM15LD21M3 at 230 V three phase
Shaft end	Untapped
IP degree of protection	IP50 standard
Speed feedback resolution	131072 points/turn
Holding brake	Without
Mounting support	International standard flange
Electrical connection	Straight connectors
Complementary	
Range compatibility	Lexium 15
	Lexium 32
	Lexium 05
supply voltage may	400.17
supply voltage max	480 V
Network number of phases	Three phase
Continuous stall current	3.2 A
maximum continuous power	1.06 W
Maximum current Irms	10 A for LXM32.D18M2
	9 A for LXM32.U90M2
	9.9 A for LXM15LD13M3
	9.9 A for LXM15LD21M3
	9.9 A for LXM15LU60N4
	9.9 A for LXM15LD10N4
Maximum permanent current	10.1 A
Switching frequency	8 kHz
Second shaft	Without second shaft end
Shaft diameter	11 mm
Shaft length	23 mm

Rotor inertia	0.25 kg.cm ²
Stator resistance	3.3 Ohm at 20 °C
Stator inductance	6.75 mH at 20 °C
Stator electrical time constant	3.73 ms at 20 °C
Maximum radial force Fr	360 N at 6000 rpm 380 N at 5000 rpm 410 N at 4000 rpm 460 N at 3000 rpm 520 N at 2000 rpm 660 N at 1000 rpm
Maximum axial force Fa	0.2 x Fr
type of cooling	Natural convection
Length	154 mm
Centring collar diameter	60 mm
centring collar depth	2.5 mm
Number of mounting holes	4
Mounting holes diameter	5.5 mm
Circle diameter of the mounting holes	82 mm
Net weight	2.2 kg
Sizing reference	BSH0701T
Network number of phases	3
Accuracy error [angular]	1.4 °
Temperature copper hot	120 °C
Temperature magnet hot	100 °C
Temperature magnet rt	20 °C

Packing Units

•	
Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	12.300 cm
Package 1 Width	12.800 cm
Package 1 Length	37.700 cm
Package 1 Weight	2.100 kg
Unit Type of Package 2	S04
Number of Units in Package 2	8
Package 2 Height	30.000 cm
Package 2 Width	40.000 cm
Package 2 Length	60.000 cm
Package 2 Weight	17.450 kg
Unit Type of Package 3	P06
Number of Units in Package 3	32
Package 3 Height	75.000 cm
Package 3 Width	80.000 cm

Package 3 Length	60.000 cm	
Package 3 Weight	77.800 ka	

Logistical informations

Country of origin

DE

Contractual warranty

Warranty

18 months



Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing "Use Better, Use Longer, Use Again" campaign to extend product lifetimes and recyclability.

Environmental Data explained >

How we assess product sustainability >

☑ Environmental footprint	
Carbon footprint (kg.eq.CO2 per CR, Total Life cycle)	1100
Environmental Disclosure	Product Environmental Profile

Use Better

⊗ Materials and Substances	
Packaging made with recycled cardboard	Yes
Packaging without single use plastic	No
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
SCIP Number	8c11b0c9-e501-4810-83eb-05fc6605ede4
REACh Regulation	REACh Declaration
PVC free	Yes

Use Again


○ Repack and remanufacture	
Circularity Profile	No need of specific recycling operations
Take-back	No
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

BSH0701T01A1A

Dimensions Drawings

Servo Motors Dimensions

Example with Straight Connectors

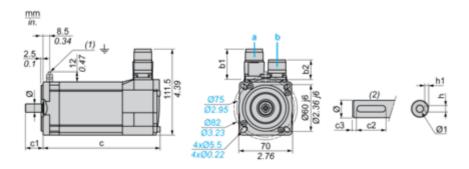

- a: Power supply for servo motor brake
- b: Power supply for servo motor encoder
- (1) M4 screw
- (2) Shaft end, keyed slot (optional)

Dimensions in mm

Straight Rotatable angled connectors connectors		c (without c (with brake)	,	c1	c2	с3	h	h1	Ø	Ø1 for		
b1	b2	b1	b2	brake)	brake)							screws
39.5	25.5	39.5	39.5	154	180	23	18	2.5	4 N9	2.5 ^{+0.1} ₀	11 k6	M4 x 10

Dimensions in in.

Straigh	angled connectors		c (without brake)	c (with brake)	с1	c2	с3	h	h1	Ø	Ø1 for screws	
b1	b2	b1	b2	Diake)								
1.55	1.00	1.55	1.55	6.06	7.08	0.90	0.70	0.09	0.16 N9	0.01 ^{+0.004} 0	0.43 k6	M4 x 0.39


BSH0701T01A1A

Performance Curves

115 V Single-Phase Supply Voltage

Torque/Speed Curves

Servo motor with LXM32•D18M2 servo drive




- X Speed in rpm
- Y Torque in Nm
- 1 Peak torque
- 2 Continuous torque

230 V Single-Phase Supply Voltage

Torque/Speed Curves

Servo motor with LXM32•U90M2 servo drive



- X Speed in rpm
- Y Torque in Nm
- 1 Peak torque
- 2 Continuous torque