



Item number: IN776MHI00SO000

The Mitsubishi Heavy Industries application has been specially designed to allow bidirectional control and monitoring of Mitsubishi Heavy Industries VRF systems from a BMS, SCADA, PLC, or any other device working as a BACnet/IP server or a BACnet MS/TP client. The solution allows the integration of up to 16 indoor units from a single interface.

Mitsubishi Heavy Industries to BACnet/IP & MS/TP - Up to 16 Indoor Units

#### Features and benefits

BACnet/IP and BACnet MS/TP support

The interface supports both BACnet/IP and BACnet MS/TP protocols.

Automatic identification

A scan function is available for automatic identification of the units present in the VRF system.

- Individual indoor unit energy consumption signals

  Energy consumption signals from each indoor unit are available, so they can be checked individually.
- Commissioning-friendly approach with Intesis MAPS

  Templates can be imported and reused as often as needed, significantly reducing commissioning time.

Direct access to the outdoor unit

Connection is simple, as the interface connects directly to the outdoor unit's communication bus.

Outdoor unit signals

Signals assigned to the outdoor unit are available to be used in the integration.

Two configuration port options

Configuration of the interface can be carried out through either its IP or USB (Console) port.

Configuration tool and interface automatic updates

Both the Intesis MAPS configuration tool and the interface's firmware can receive automatic updates.





General	
Net Width (mm)	106
Net Height (mm)	58
Net Depth (mm)	90
Net Weight (g)	240
Packed Weight (g)	310
Operating Temperature °C Min	-10
Operating Temperature °C Max	60
Storage Temperature °C Min	-30
Storage Temperature °C Max	60
Power Consumption (W)	127
Input Voltage (V)	For DC: 12 36 VDC ±10%, Max: 250 mA For AC: 24 VAC ±10 %, 50-60 Hz, Max: 127 mA Recommended voltage: 24 VDC, Max: 127 mA
Power Connector	3-pole
Configuration	Intesis MAPS
Capacity	Up to 16 indoor units and up to 12 outdoor units.
Installation Conditions	This gateway is designed to be mounted inside an enclosure. If the unit is mounted outside an enclosure, precautions should always be taken to prevent electrostatic discharge to the unit. When working inside an enclosure (e.g., making adjustments, setting switches, etc.), typical anti-static precautions should always be followed before touching the unit.
Content of Delivery	Intesis Gateway, Installation Manual, USB Configuration cable.
Not Included (in delivery)	Power supply not included.
Mounting	DIN rail mount (bracket included), Wall mount
Housing Materials	Plastic



**WEEE Category** 




General	
Warranty (years)	3 years
Packaging Material	Cardboard
Identification an	d Status
Product ID	IN776MHI00SO000_BAC_MHI
Country of Origin	Spain
HS Code	8517620000
Export Control Classification Number (ECCN)	EAR99
Physical Feature	S
Physical Feature	Power supply, EIA-485, KNX, Ethernet, HVAC port, Binary inputs (dry contact), Console port USB.
,	Power supply, EIA-485, KNX, Ethernet, HVAC port, Binary inputs (dry contact),
Connectors / Input / Output	Power supply, EIA-485, KNX, Ethernet, HVAC port, Binary inputs (dry contact), Console port USB.
Connectors / Input / Output  LED Indicators	Power supply, EIA-485, KNX, Ethernet, HVAC port, Binary inputs (dry contact), Console port USB.  Gateway and communication status.  Factory reset. I-Am message (for BACnet only). Normal mode/programming mode
Connectors / Input / Output  LED Indicators  Push Buttons	Power supply, EIA-485, KNX, Ethernet, HVAC port, Binary inputs (dry contact), Console port USB.  Gateway and communication status.  Factory reset. I-Am message (for BACnet only). Normal mode/programming mode switch (for KNX only).
Connectors / Input / Output  LED Indicators  Push Buttons  DIP & Rotary Switches	Power supply, EIA-485, KNX, Ethernet, HVAC port, Binary inputs (dry contact), Console port USB.  Gateway and communication status.  Factory reset. I-Am message (for BACnet only). Normal mode/programming mode switch (for KNX only).  EIA-485 serial port configuration.  Manganese Dioxide Lithium button battery.

IT and telecommunications equipment





#### Use Case

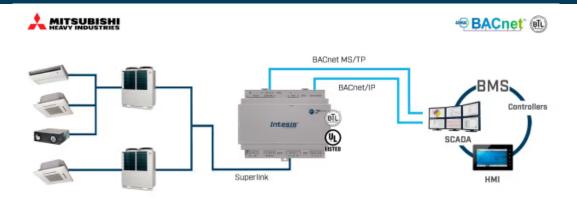

Integration example.



Use Intesis MAPS to change the protocol: BACnet, Modbus, KNX, or Home Automation

