GHA50

A 500 (4)



Information the Home page is the latest.



Photo is an image of the appearance. May differ from the actual product.

Recommended EMI/EMC Filter EAC-10-472

High voltage pulse noise type : EAP series Low leakage current type: EAM series

*The EMI/EMC Filter is recommended to connect with several devices.

①Series name ②Single output ③Output wattage ④Universal input ⑤Output voltage Optional *6

T3: mounting hole M3
J1: VH(J.S.T.)connector type
R3: with Subfeatures
(5VAUX,12VAUX,Remote,
Power good) P : Pallarel Operation

Specification is changed at option, refer to Instruction

[Cautions] • Forced air cooling is required for the maximum output power. Please see instruction manual. • Avoid applying stress to surface mount components. • De-rating is required if the applied input voltage is 90-115VAC. • The electrolytic capacitor has limited life span which is very much dependent on the actual operating conditions. • Operating in the presense of chemical vapors or harsh environmnet can affect the power supply life expectnacy. • Please make sure to read the instruction manual carefully before using this product. It should be in the "Instruction Manual" not spec sheet.					Specification is changed at option, refer to Instruction manual.	
MODEL			GHA500F-12	GHA500F-15	GHA500F-24	GHA500F-48
MAX OUTPUT WATTAGE[W]			500.8	501	504	504
	Forced air		12V 41.7A	15V 33.4A	24V 21.0A	48V 10.5A
DC OUTPUT	Convection	at 40°C	12V 12.5A	15V 10.0A	24V 6.3A	48V 3.2A
		at 50°C	12V 9.2A	15V 7.4A	24V 4.6A	48V 2.3A
	conduction	at 0°C	12V 30.0A	15V 24.0A	24V 15.0A	48V 7.5A
	cooling	at 50°C	12V 16.7A	15V 13.4A	24V 8.4A	48V 4.2A

SPECIFICATIONS

	MODEL		GHA500F-12	GHA500F-15	GHA500F-24	GHA500F-48	
	VOLTAGE[V]						
	ACIN 120V		AC90 - 264 1 φ (output derating is required at AC90V -115V *3) 5.4typ				
	CURRENT[A]	ACIN 230V					
	FREQUENCY[Hz]		50 / 60 (47 - 63)				
		ACIN 120V	88typ	90typ	90typ	90typ	
NPUT	EFFICIENCY[%]	ACIN 230V	90typ	92typ	92typ	92typ	
	POWER FACTOR	ACIN 120V	0.95typ				
	(lo=100%)	ACIN 230V	0.90typ				
	INDUCH CUDDENTIAL	ACIN 120V	20typ (lo=100%) (At cold start) (Ta=25°C)				
			40typ (Io=100%) (At cold start) (Ta=25°C)				
	LEAKAGE CURRENT[mA]		0.125/0.250max (ACIN	120V/240V 60Hz,lo=100	0%, According to IEC60601	-1)	
	VOLTAGE[V]		12	15	24	48	
		Forced air	41.7	33.4	21.0	10.5	
	CURRENT[A]	Convection		7.4	4.6	2.3	
		conduction cooling		13.4	8.4	4.2	
	LINE REGULATION[60max	96max	192max	
	LOAD REGULATION			120max	150max	240max	
	RIPPLE[mVp-p] *1		240max	240max	240max	300max	
	······································		320max	320max	320max	400max	
UTPUT	RIPPLE NOISE[mVp-p]*1		300max	300max	300max	480max	
	MIPPLE MOISE[IIIVP-P]*		360max	360max	360max	500max	
	TEMPERATURE REGULATION[mV]		120max	120max	240max	480max	
			150max	150max	290max	600max	
	DRIFT[mV] *2		48max	60max	96max	192max	
	START-UP TIME[ms]		500typ (ACIN 120V, Io=100%)				
	HOLD-UP TIME[ms]		16typ (ACIN 120V, Io=1		04 00 1 00 40	40.00 / 50.00	
	OUTPUT VOLTAGE ADJUSTMENT		10.80 to 13.20	13.50 to 16.50	21.60 to 26.40	43.20 to 52.80	
	OUTPUT VOLTAGE SETTING[V]		12.00 to 12.48	15.00 to 15.30	24.00 to 24.96	48.00 to 49.92	
	OVERCURRENT PROT						
ROTECTION	OVERVOLTAGE PROTEC	CHON[V]	13.80 to 16.80	17.25 to 21.00	27.60 to 33.60	55.20 to 67.20	
IRCUIT AND	AUX1 (12V1A)		Optional				
THERS	AUX2 (5V1A)		Optional				
	REMOTE ON/OFF		Optional Optional				
	PowerGood		Optional AC4,000V 1minute, Cutoff current = 10mA, DC500V 50MΩ min (At Room Temperature)				
ISOLATION	INPUT-OUTPUT RC AUX */		AC2,000V 1minute, Cutoff current = 10mA, DC500V 50M Ω min (At Room Temperature)				
			AC500V 1minute, Cutoff current = 25mA, DC500V 50MΩ min (At Room Temperature) AC500V 1minute, Cutoff current = 25mA, DC500V 50MΩ min (At Room Temperature)				
ENVIRONMENT			-20 to +80°C, 20 - 90%RH (Non condensing)				
	VIBRATION		10 - 55Hz, 19.6m/s² (2G), 3minutes period, 60minutes each along X, Y and Z axis				
	IMPACT		196.1m/s² (20G), 11ms, once each X, Y and Z axis				
AFETY AND	TY AND AGENCY APPROVALS		UL60950-1, ANSI/AMII ES60601-1, C-UL, EN60950-1, EN60601-1				
IOISE			Complies with FCC-B, VCCI-B, CISPR11-B, CISPR22-B, EN55011-B, EN55022-B				
	HARMONIC ATTENUATOR		Complies with IEC61000-3-2 (class A) *5				
	HARMONIC ATTENL	JAIOR	i Gombiles with IFG6 100	U-5-7 (CIASS A) 👀			
	CASE SIZE/WEIGHT				HXD) / 420g max		

- *1 This is the value that measured on measuring board with capacitor of 22 µF at 150mm from output terminal.
 - Measured by 20MHz oscilloscope or Ripple-Noise meter (Equivalent to KEISOKU-GIKEN: RM103).
- *2 Drift is the change in DC output for an eight hour period after a half-hour warm-up at 25°C, with the input voltage held constant at the rated input/output.
- *3 Derating is required.
- *4 Please contact us about dynamic load and input response.

- *5 Please contact us about another class.
- *6 Specification is changed at option, refer to Instruction Manual.
- Applicable when AUX and remote control (optional) is added.
- To meet the specifications. Do not operate over-loaded condition.
- Sound noise may be generated by power supply in case of pulse load.
- Parallel operation is not possible.







Features

- · Wattage 500W max
- · High Power density:24.1W/inch3
- · High efficiency 92% typ (Input Voltage 230V,Output Voltage 24V)
- · Conduction cooling
- 3"× 5 "standard footprint
- · Fits 1U applications
- Industrial and Medical safety approvals
- · Low leakage current
- · With Remote On/Off (Optional)
- · With AUX1 (5V), AUX2 (12V) (Optional)
- · No minimum load is required

Block diagram

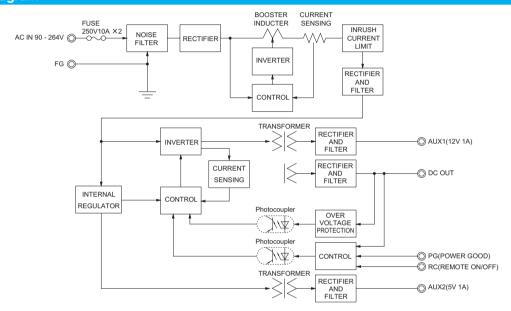

External view

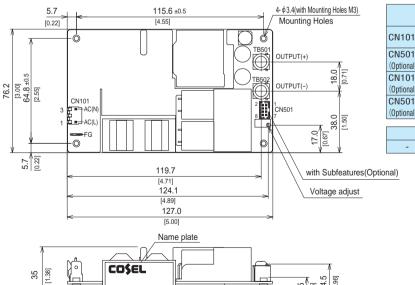

35 CO\$ET 5.00 10.0

- Tolerance ±1 [±0.04]
- Weight : 420g max
 There is a total of four attachment holes.
- Base Plate : Aluminum
- ** Dimensions in mm, []=inches
 ** Screw tightening torque : (TB501, 502) : 1.5N · m max
- Mounting toque : 0.6N · m max
 Avoid contact between TB501 and 502 wiring with mounting parts.
- Option : -J1 : (J.S.T) connector type. Refer to Instruction Manual 5.

Mating I/OConnector Terminal Mfr connector 08-50-0105 08-65-0114 CN101 A-41671-A03A197-2 09-50-8031 MOLEX CN501 087831-0820 50394-8051 51110-0851 (Optional) CN101 B2P3-VH VHR-3N SVH-21T-P1.1 (Optional) J.S.T. CN501 **B8B-PHDSS** PHDR-08VS SPHD-002T-P0.5

FG			Mating connector	Terminal	Mfr	
	-	250 Series	-	170603-2	Tyco Electronics	

<Pin Assignments>

<CN101>

Pin No.	Input
1	AC(L)
2	
3	AC(N)

CN501(Ontional)

<unoutlibrial)></unoutlibrial)>				
Pin No.	Function			
1	AUX1 : AUX1 (12V1A)			
2	AUX1G: AUX1 (GND)			
3	RC1 : REMOTE ON/OFF			
4	RCG : REMOTE ON/OFF (GND)			
5	PG : Power good			
6	PGG : Power good (GND)			
7	AUX2 : AUX2 (5V1A)			
8	AUX2G: AUX2 (GND)			



GHA

CN501