

1101122

https://www.phoenixcontact.com/in/products/1101122

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



CHARX connect standard, CCS type 1, DC charging cable, up to 500 A in Boost mode, 200 A Permanent, 1000 V DC, with vehicle charging connector and open cable end, cable: 6 m, black, straight, with charging connector holder, with analog temperature sensors, PHOENIX CONTACT logo, SAE J1772, IEC 62196-3, for charging electric vehicles (EV) with direct current (DC)

### Product description

DC charging cable with vehicle charging connector and free cable end for fast charging of electric vehicles (EV) with direct current (DC) via CCS type 1 vehicle charging inlets, for installation at charging stations for e-mobility (EVSE)

### Your advantages

- · Complete product range
- · The right charging cable for every application, from the carport to the charging park
- · Convenient handling due to the ergonomic design
- · Available with your logo on request for consistent branding of your charging station
- · Developed and produced in accordance with the IATF 16949 automotive standard and ISO 9001

### Commercial data

Item number	1101122
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	****
Product key	XWBAAB
GTIN	4055626957562
Weight per piece (including packing)	13,500 g
Weight per piece (excluding packing)	13,000 g
Customs tariff number	85444290
Country of origin	DE



1101122

https://www.phoenixcontact.com/in/products/1101122

### Technical data

### Product properties

Product type	DC charging cable
Product family	CHARX connect standard
Application	for charging electric vehicles (EV) with direct current (DC)
	for installation at charging stations for electromobility (EVSE)
Туре	DC charging cable
	with vehicle charging connector and open cable end
Design	with charging connector holder
	with analog temperature sensors
Technology	Combined Charging System
Affixed logo	PHOENIX CONTACT logo
Label	8.9 mm x 28.9 mm (customer logo on request)
Charging standard	CCS type 1
Charging mode	Mode 4
	DC level 2

### Electrical properties

Type of signal transmission	Pulse width modulation with modulated Powerline communication in accordance with ISO/IEC 15118 / DIN SPEC 70121
Note on the connection method	Crimp connection, cannot be disconnected
Coding	480 Ω (Lever actuated)
	150 $\Omega$ (Lever not actuated)
Temperature monitoring	2x Pt 1000
Type of charging current	DC
Charging power	200 kW
Charging current	200 A DC
Type of charging current	DC Boost Mode
Charging power	up to 500 kW (Boost Mode, depending on the ambient conditions. For detailed information, see the packing slip in the download area for this item.)
Charging current	up to 500 A DC
Power contact	

Number	3 (PE, DC+, DC-)
Rated voltage	1000 V DC
Rated current	200 A (up to 40 °C)

### Signal contact

olgilar contact	
Number	2 (CP, CS)
Rated voltage	30 V AC
Rated current	2 A

Temperature sensors (Pt 1000)



1101122

https://www.phoenixcontact.com/in/products/1101122

Sensor type	Pt 1000
Standards/regulations	DIN EN 60751
Attachment point	Sensor for the DC contacts
Switch-off temperature	90 °C ±1 K (equivalent to a Pt 1000 value of 1346.5 $\Omega$ )
Long-term stability	0.06 % (after 1000 hours at 130 °C)
Recommended measured current	1 mA (1 V at 0°C)
Coefficient	3850 ppm/K
Ambient temperature	-50 °C 130 °C (Operation)

### **Dimensions**

### Vehicle charging connector

Width	69.6 mm
Height	192.6 mm
Depth	284.6 mm

### Material specifications

Color (Housing)	black (9005)
Color (Handle area)	black (9005)
Color (Mating face)	black (9005)
Color (Protective cap)	black (9005)
Color (Cable)	black (9005)
Material (Vehicle charging connector)	Plastic
Material (Cable outer sheath)	TPE
Material (Contact surface)	Silver
Flammability rating according to UL 94	V0 (Mating face)

### Cable/line

Cable length	6 m ±45 mm
Wiring standards/regulations	UL 62
	FFSO7.E343212
Cable weight	max. 1900.00 kg/km
Cable type	straight
Cable structure	2 x 1 AWG + 1 x 3 AWG + 3 x 2 x 18 AWG
External cable diameter	35.30 mm ±0.5 mm
Outer sheath, material	TPE
Stripping length of the sheath	180 mm ±10 mm
Stripping length	180 mm ±10 mm
Cable resistance	$\leq$ 0.00044 $\Omega$ /m (based on a power core, at an ambient temperature of 20°C)
Bending radius	min. 529.5 mm (15x diameter)

### Mechanical properties

#### Mechanical data

Insertion/withdrawal cycles	> 10000



1101122

https://www.phoenixcontact.com/in/products/1101122

Insertion force	< 75 N
Withdrawal force	< 75 N

### Environmental and real-life conditions

#### Ambient conditions

Degree of protection (Vehicle charging connector)	IP54 / Type 3R (The degree of protection is only ensured in the ready and plugged-in state when both plug-in components are original products from Phoenix Contact or suitable standard-compliant products.)
Ambient temperature (operation)	-30 °C 40 °C
	max. 55 °C (Current reduction required, observe the DC contact temperature limit value of 90°C)
Ambient temperature (storage/transport)	-40 °C 80 °C
Altitude	5000 m (above sea level)

### Standards and regulations

#### Standards


Standards/regulations	SAE J1772	
	IEC 62196-3	



1101122

https://www.phoenixcontact.com/in/products/1101122

### **Drawings**

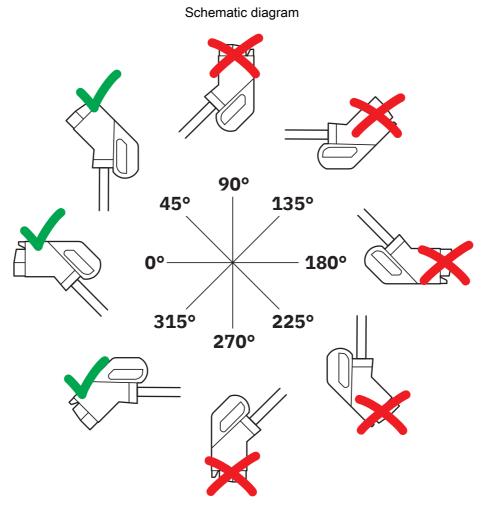


The resting position must be installed in the charging station such that the user cannot hang up the vehicle connector upside down (90° to 270°). However, positions rotated upward (45°) or downward (315°) are options for a resting position.



1101122


https://www.phoenixcontact.com/in/products/1101122

### Dimensional drawing

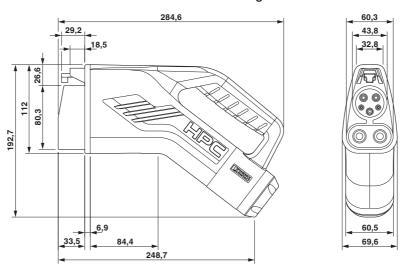

Make sure that the vehicle charging connector is placed in an appropriate charging connector holder, which ensures a minimum protection rating of IP24 in accordance with IEC 61851-1, for the entire time between charging. To create this charging connector holder, use the dimensions of the vehicle charging connector. Detailed dimensions can also be found in the Download area.

### Schematic diagram

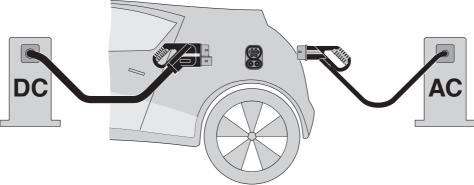


The Combined Charging System (CCS) principle - standard-compliant charging system for electric vehicles, which supports both conventional AC charging and fast DC charging. Both Vehicle Connectors fit into the CCS Vehicle Inlet.



1101122

https://www.phoenixcontact.com/in/products/1101122



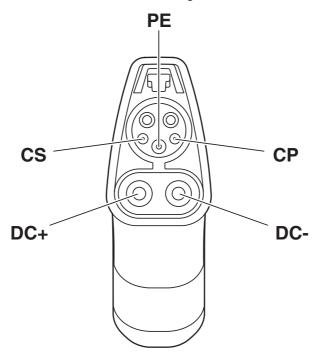


Pin assignment of the Vehicle Connector



1101122

https://www.phoenixcontact.com/in/products/1101122

### Schematic diagram

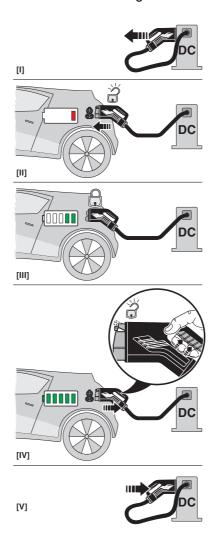


Operating instructions



1101122

https://www.phoenixcontact.com/in/products/1101122

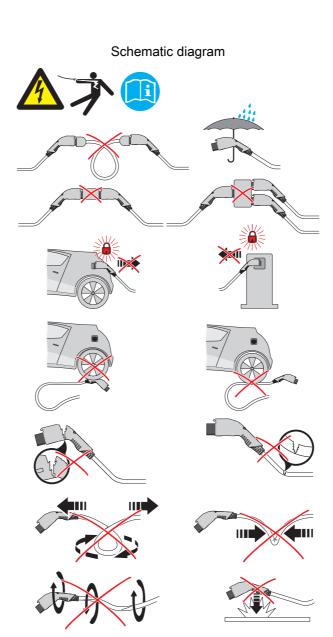

Warnings regarding use



1101122

https://www.phoenixcontact.com/in/products/1101122

### **Approvals**

To download certificates, visit the product detail page: https://www.phoenixcontact.com/in/products/1101122

c <b>FX</b> 2 us	cULus Recognized Approval ID: E473195-20220131				
		Nominal voltage U <sub>N</sub>	Nominal current I <sub>N</sub>	Cross section AWG	Cross section mm <sup>2</sup>
		1000 V	200 A	-	-



1101122

https://www.phoenixcontact.com/in/products/1101122

### Classifications

UNSPSC 21.0

### **ECLASS**

ECLASS-11.0	27144705	
ECLASS-12.0	27144705	
ECLASS-13.0	27144705	
ETIM		
ETIM 9.0	EC002897	
UNSPSC		

39121500



1101122

https://www.phoenixcontact.com/in/products/1101122

### Environmental product compliance

Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-10
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%



1101122

https://www.phoenixcontact.com/in/products/1101122

#### Accessories

#### EV-T1CCS-PARK - Charging connector holder

1624143

https://www.phoenixcontact.com/in/products/1624143



CHARX connect, CCS type 1, Charging connector holder, Accessories, Front mounting, housing: black, for vehicle charging connectors on charging stations (EVSE), SAE J1772

### EV-T1CCS-MF-M4X10-BIT-C - Repair kit

1158266

https://www.phoenixcontact.com/in/products/1158266



CHARX connect standard, CCS type 1, Repair kit, Accessories, Screw mounting, housing: black, with DC contact holder with integrated front part of the DC contacts, with replaceable mating face frame, with 5x M4X10 flat-head screws with Torx safety drive (IPR TORX PLUS®), with special bit (867/4 IPR TORX PLUS® bit, 20 IPR x 89 mm) for insulated screwdriver, for replacement of the mating face frame of vehicle charging connectors, IEC 62196-3, SAE J1772, The vehicle connector housing does not have to be opened in order to replace the mating face frame.



1101122

https://www.phoenixcontact.com/in/products/1101122

#### EV-T1CCS-MF-M4X10-C - Repair kit

1288248

https://www.phoenixcontact.com/in/products/1288248



CHARX connect standard, CCS type 1, Repair kit, Accessories, Screw mounting, housing: black, with DC contact holder with integrated front part of the DC contacts, with replaceable mating face frame, with 5x M4X10 flat-head screws with Torx safety drive (IPR TORX PLUS®), for replacement of the mating face frame of vehicle charging connectors, IEC 62196-3, SAE J1772, The vehicle connector housing does not have to be opened in order to replace the mating face frame.

#### EV-T1CCS-MF-M4X10-BIT - Repair kit

1085801

https://www.phoenixcontact.com/in/products/1085801



CHARX connect, CCS type 1, Repair kit, Accessories, Screw mounting, housing: black, with replaceable mating face frame, with 5x M4X10 flat-head screws with Torx safety drive (IPR TORX PLUS®), with special bit (867/4 IPR TORX PLUS® bit, 20 IPR x 89 mm) for insulated screwdriver, for replacement of the mating face frame of vehicle charging connectors, IEC 62196-3-1, SAE J1772, Replacement without draining the coolant



1101122

https://www.phoenixcontact.com/in/products/1101122

#### EV-T1CCS-MF-M4X10 - Repair kit

1085800

https://www.phoenixcontact.com/in/products/1085800



CHARX connect, CCS type 1, Repair kit, Accessories, Screw mounting, housing: black, with replaceable mating face frame, with 5x M4X10 flat-head screws with Torx safety drive (IPR TORX PLUS®), for replacement of the mating face frame of vehicle charging connectors, IEC 62196-3-1, SAE J1772, Replacement without draining the coolant

### EV-T1CCS-M4X20-BIT-C - Repair kit

1288250

https://www.phoenixcontact.com/in/products/1288250



CHARX connect standard, CCS type 1, Repair kit, Accessories, Screw mounting, housing: black, with DC contact holder with integrated front part of the DC contacts, with special bit (867/4 IPR TORX PLUS® bit, 20 IPR x 89 mm) for insulated screwdriver, IEC 62196-3, SAE J1772



1101122

https://www.phoenixcontact.com/in/products/1101122

### EV-T1CCS-M4X20-C - Repair kit

1288247

https://www.phoenixcontact.com/in/products/1288247



CHARX connect standard, CCS type 1, Repair kit, Accessories, Screw mounting, housing: black, with DC contact holder with integrated front part of the DC contacts, IEC 62196-3, SAE J1772

### G-INSEC-M63-L68N-NCRS-S - Cable gland

1411194

https://www.phoenixcontact.com/in/products/1411194



Cable gland, material for screw connection: Brass, nickel-plated, application: EMC, external cable diameter 32 mm  $\dots$  42 mm, shielding: yes, connecting thread: M63 x 1.5, color: silver, with O-ring



1101122

https://www.phoenixcontact.com/in/products/1101122

### CHARX PS/3AC/920DC/87.5KW - DC power module

1162690

https://www.phoenixcontact.com/in/products/1162690



CHARX power basic, Fast charging module for setting up DC charging stations, Rack mounting, input: 3-phase, output: 200 V DC...920 V DC / 125 A. The corresponding system control cabinet CHARX PS-CAB/4x87.5KW (Item No. 1165442) is necessary for operating the DC power module

### CHARX PS-M2/3AC/1000DC/30KW - DC power module

1232243

https://www.phoenixcontact.com/in/products/1232243

CHARX power basic, Fast charging module for setting up DC charging stations, 19" rack mounting, input: 3-phase, output: 30 V DC...1000 V DC / 0 A...100 A





1101122

https://www.phoenixcontact.com/in/products/1101122

### CHARX PS-M2/825DC/1000DC/30KW - DC power module

1296467

https://www.phoenixcontact.com/in/products/1296467

CHARX power basic, Fast charging module for setting up DC charging stations, 19" rack mounting, output: 30 V DC...1000 V DC / 0 A...100 A



Phoenix Contact 2025 @ - all rights reserved https://www.phoenixcontact.com

PHOENIX CONTACT (I) Pvt. Ltd. A-58/2, Okhla Industrial Area, Phase - II, New Delhi-110 020

+91.1275.71420 info@phoenixcontact.co.in