

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (http://phoenixcontact.com/download)



6.2 mm PLC basic terminal block with interference current and interference voltage protection on the control side, with push-in connection, without relay or solid-state relay, with sensor supply voltage distribution (BB), 1 N/O contact, input voltage 230 V AC

## Your advantages

High relay release voltage

☑ Resistant to interference currents



## **Key Commercial Data**

| Packing unit                         | 10 pc                          |
|--------------------------------------|--------------------------------|
| GTIN                                 | 4 046356 507776                |
| GTIN                                 | 4046356507776                  |
| Weight per Piece (excluding packing) | 26.000 g                       |
| Custom tariff number                 | 85366990                       |
| Country of origin                    | Germany                        |
| Note                                 | Made to Order (non-returnable) |

## Technical data

## Note

| Utilization restriction | EMC: class A product, see manufacturer's declaration in the download area |
|-------------------------|---|
| D: .                    |   |

### Dimensions

| Width  | 6.2 mm |
|--------|--------|
| Height | 80 mm  |
| Depth  | 94 mm  |

### Ambient conditions

| Ambient temperature (operation)         | -40 °C 55 °C |
|---|--------------|
| Ambient temperature (storage/transport) | -40 °C 85 °C |



## Technical data

## Input data

| Input voltage range in reference to U <sub>N</sub> | 0.78 1.14                         |
|--|-----------------------------------|
| Typical release voltage                            | 80 V AC                           |
| Nominal input voltage U <sub>N</sub>               | 120 V AC                          |
| Status display                                     | LED                               |
| Protective circuit                                 | Bridge rectifier Bridge rectifier |
|  | RCZ filter RCZ filter             |

## Output data

| Miniature relay, REL-MR-60DC/21AU, REL-MR-60DC/21;<br>miniature optocoupler, OPT-60DC/48DC/100, OPT-60DC/24DC/2, |
|--|
| OPT-60DC/230AC/1   |

## General

| Protective circuit    | Bridge rectifier Bridge rectifier |
|-----------------------|-----------------------------------|
|                       | RCZ filter RCZ filter             |
| Color                 | gray                              |
| Operating mode        | 100% operating factor             |
| Mounting position     | any                               |
| Assembly instructions | In rows with zero spacing         |

## Connection data

| Connection name                  | Input side                       |
|----------------------------------|----------------------------------|
| Connection method                | Push-in connection               |
| Stripping length                 | 10 mm                            |
| Conductor cross section solid    | 0.14 mm² 2.5 mm²                 |
| Conductor cross section flexible | 0.14 mm² 2.5 mm²                 |
|                                  | 0.2 mm² 2.5 mm² (Single ferrule) |
|                                  | 2x 0.5 mm² 1 mm² (TWIN ferrule)  |
| Conductor cross section AWG      | 26 14                            |

## Connection data 2

| Connection name                  | Output side                      |
|----------------------------------|----------------------------------|
| Connection method                | Push-in connection               |
| Stripping length                 | 10 mm                            |
| Conductor cross section solid    | 0.14 mm² 2.5 mm²                 |
| Conductor cross section flexible | 0.14 mm² 2.5 mm²                 |
|                                  | 0.2 mm² 2.5 mm² (Single ferrule) |
|                                  | 2x 0.5 mm² 1 mm² (TWIN ferrule)  |
| Conductor cross section AWG      | 26 14                            |

## Standards and Regulations

| Connection in acc. with standard | CUL |
|----------------------------------|-----|

## **Environmental Product Compliance**

| REACh SVHC | Lead 7439-92-1 |
|------------|----------------|
|            |                |




## Technical data

## **Environmental Product Compliance**

| China RoHS | Environmentally Friendly Use Period = 50  |
|------------|---|
|            | For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration" |


## **Drawings**

## Application drawing

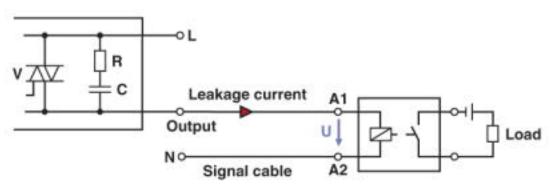

Occurrence of interference signals Scenario 1: controller - AC output card

### Application drawing

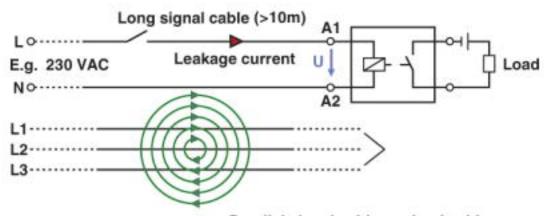


Parallel signal cables or load cables

Occurrence of interference signals Scenario 2: long signal cables





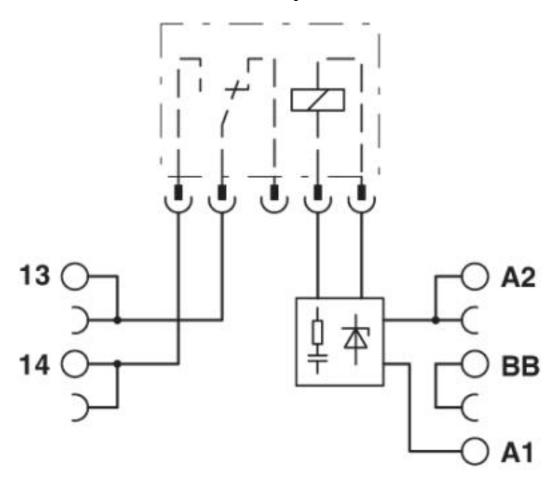

## Classifications

## eCl@ss

| eCl@ss 4.0 | 27371000 |
|------------|----------|
| eCl@ss 4.1 | 27371000 |
| eCl@ss 5.0 | 27371600 |
| eCl@ss 5.1 | 27371600 |
| eCl@ss 6.0 | 27371600 |
| eCl@ss 7.0 | 27371603 |
| eCl@ss 8.0 | 27371603 |
| eCl@ss 9.0 | 27371603 |

## **ETIM**

| ETIM 2.0 | EC001456 |
|----------|----------|
| ETIM 3.0 | EC001456 |
| ETIM 4.0 | EC001456 |
| ETIM 5.0 | EC001456 |



## Classifications

## **ETIM**

| ETIM 6.0 | EC001456 |
|----------|----------|
| ETIM 7.0 | EC001456 |

### **UNSPSC**

| UNSPSC 6.01   | 30211917 |
|---------------|----------|
| UNSPSC 7.0901 | 39121516 |
| UNSPSC 11     | 39121516 |
| UNSPSC 12.01  | 39121516 |
| UNSPSC 13.2   | 39122326 |

## Approvals

Approvals

Approvals

DNV GL / UL Recognized / cUL Recognized / EAC / cULus Recognized

Ex Approvals

### Approval details

| DNV GL | TUV | https://approvalfinder.dnvgl.com/ | TAE0000196-02 |
|--------|-----|-----------------------------------|---------------|
|--------|-----|-----------------------------------|---------------|

UL Recognized http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm FILE E 238705

cUL Recognized http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm FILE E 238705

EAC RU C-DE.A\*30.B.01082

cULus Recognized



Accessories

Accessories

Bridge

Continuous plug-in bridge - FBST 500-PLC RD - 2966786



Continuous plug-in bridge, length: 500 mm, color: red

Continuous plug-in bridge - FBST 500-PLC BU - 2966692



Continuous plug-in bridge, length: 500 mm, color: blue

Continuous plug-in bridge - FBST 500-PLC GY - 2966838



Continuous plug-in bridge, length: 500 mm, color: gray

Single plug-in bridge - FBST 6-PLC RD - 2966236



Single plug-in bridge, length: 6 mm, number of positions: 2, color: red

Single plug-in bridge - FBST 6-PLC BU - 2966812



Single plug-in bridge, length: 6 mm, number of positions: 2, color: blue  $\,$ 



### Accessories

Single plug-in bridge - FBST 6-PLC GY - 2966825



Single plug-in bridge, length: 6 mm, number of positions: 2, color: gray

Single plug-in bridge - FBST 8-PLC GY - 2967688



Single plug-in bridge, length: 8 mm, number of positions: 2, color: gray

Single plug-in bridge - FBST 14-PLC BK - 2967691



Single plug-in bridge, length: 14 mm, number of positions: 2, color: black

### Controller board

System connection - PLC-V8/FLK14/IN - 2296553



V8 adapter for 8 x PLC-INTERFACE (6.2 mm), controller: PLC system cabling of input cards, connection 1: Screw connection 1x, connection 2: IDC/FLK pin strip 1x 14-position, connection 3: Plug connection (Can be snapped onto 8x PLC-INTERFACE terminals), number of channels: 8, control logic: positive switching

System connection - PLC-V8/FLK14/IN/M - 2304115



V8 adapter for 8 x PLC-INTERFACE (6.2 mm), controller: PLC system cabling of input cards, connection 1: Screw connection 1x, connection 2: IDC/FLK pin strip 1x 14-position, connection 3: Plug connection (Can be snapped onto 8x PLC-INTERFACE terminals), number of channels: 8, control logic: negative switching



### Accessories

System connection - PLC-V8/D15S/IN - 2296074



V8 adapter for 8 x PLC-INTERFACE (6.2 mm), controller: PLC system cabling of input cards, connection 1: Screw connection 1x, connection 2: D-SUB pin strip 1x 15-position, connection 3: Plug connection (Can be snapped onto 8x PLC-INTERFACE terminals), number of channels: 8, control logic: positive switching

#### System connection - PLC-V8/D15B/IN - 2296087



V8 adapter for 8 x PLC-INTERFACE (6.2 mm), controller: PLC system cabling of input cards, connection 1: Screw connection 1x, connection 2: D-SUB socket strip 1x 15-position, connection 3: Plug connection (Can be snapped onto 8x PLC-INTERFACE terminals), number of channels: 8, control logic: positive switching

### DIN rail

DIN rail, unperforated - NS 35/7,5 V2A UNPERF 2000MM - 0801377



DIN rail, unperforated, Standard profile, width: 35 mm, height: 7.5 mm, acc. to EN 60715, material: Stainless steel V2A, uncoated, length: 2000 mm, color: silver

#### DIN rail perforated - NS 35/7,5 PERF 2000MM - 0801733



DIN rail perforated, Standard profile, width: 35 mm, height: 7.5 mm, acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, length: 2000 mm, color: silver

### DIN rail, unperforated - NS 35/7,5 CU UNPERF 2000MM - 0801762



DIN rail, unperforated, Standard profile, width: 35 mm, height: 7.5 mm, acc. to EN 60715, material: Copper, uncoated, length: 2000 mm, color: copper-colored



## Accessories

DIN rail, unperforated - NS 35/15 UNPERF 2000MM - 1201714



DIN rail, unperforated, Standard profile, width: 35 mm, height: 15 mm, similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, length: 2000 mm, color: silver

DIN rail, unperforated - NS 35/15 CU UNPERF 2000MM - 1201895



DIN rail, unperforated, Standard profile, width: 35 mm, height: 15 mm, similar to EN 60715, material: Copper, uncoated, length: 2000 mm, color: copper-colored

DIN rail, unperforated - NS 35/15-2,3 UNPERF 2000MM - 1201798



DIN rail, unperforated, Standard profile 2.3 mm, width: 35 mm, height: 15 mm, acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, length: 2000 mm, color: silver

DIN rail, unperforated - NS 35/15 AL UNPERF 2000MM - 1201756



DIN rail, unperforated, Standard profile, width: 35 mm, height: 15 mm, similar to EN 60715, material: Aluminum, uncoated, length: 2000 mm, color: silver

DIN rail perforated - NS 35/15 PERF 2000MM - 1201730



DIN rail perforated, Standard profile, width: 35 mm, height: 15 mm, similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, length: 2000 mm, color: silver



## Accessories

DIN rail, unperforated - NS 35/7,5 UNPERF 2000MM - 0801681



DIN rail, unperforated, Standard profile, width: 35 mm, height: 7.5 mm, acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, length: 2000 mm, color: silver

#### Labeled terminal marker

Zack marker strip - ZB 6,LGS:FORTL.ZAHLEN - 1051016



Zack marker strip, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, printed horizontally: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 491 ... 500, mounting type: snap into tall marker groove, for terminal block width: 6.2 mm, lettering field size: 6.15 x 10.5 mm, Number of individual labels: 10

### Partition plate

Separating plate - PLC-ATP BK - 2966841



Separating plate, 2 mm thick, required at the start and end of a PLC terminal strip. Furthermore, it is used for: visual separation of groups, safe isolation of different voltages of neighboring PLC relays in acc. with DIN VDE 0106-101, isolation

#### Power module

Power terminal block - PLC-ESK GY - 2966508



Power terminal block, for the input of up to four potentials, for mounting on NS 35/7.5

### Screwdriver tools

Screwdriver - SZF 1-0,6X3,5 - 1204517



Actuation tool, for ST terminal blocks, also suitable for use as a bladed screwdriver, size: 0.6 x 3.5 x 100 mm, 2-component grip, with non-slip grip



### Accessories

#### Terminal marking

Zack marker strip - ZB 6:UNBEDRUCKT - 1051003



Zack marker strip, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snap into tall marker groove, for terminal block width: 6.2 mm, lettering field size: 6.15 x 10.5 mm, Number of individual labels: 10

### Zack marker strip - ZB 6/WH-100:UNBEDRUCKT - 5060935



Zack marker strip, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snap into tall marker groove, for terminal block width: 6.2 mm, lettering field size: 6.15 x 10.5 mm, Number of individual labels: 10

#### Marker for terminal blocks - UC-TM 6 - 0818085



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: snap into tall marker groove, for terminal block width: 6.2 mm, lettering field size: 5.6 x 10.5 mm, Number of individual labels: 80

#### Marker for terminal blocks - UCT-TM 6 - 0828736



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: snap into tall marker groove, for terminal block width: 6.2 mm, lettering field size: 5.6 x 10.5 mm, Number of individual labels: 60

### Necessary add-on products

### Single relay - REL-MR- 60DC/21AU - 2961134



Plug-in miniature power relay, with multi-layer gold contact, 1 PDT, input voltage 60 V DC



## Accessories

Single relay - REL-MR- 60DC/21 - 2961118



Plug-in miniature power relay, with power contact, 1 PDT, input voltage 60 V DC

Miniature solid-state relay - OPT-60DC/ 48DC/100 - 2966621



Plug-in miniature solid-state relay, input solid-state relay, 1 N/O contact, input: 60 V DC, output: 3 - 48 V DC/100 mA

Miniature solid-state relay - OPT-60DC/ 24DC/ 2 - 2966605



Plug-in miniature solid-state relay, power solid-state relay, 1 N/O contact, input: 60 V DC, output: 3 ... 33 V DC/3 A

Miniature solid-state relay - OPT-60DC/230AC/ 1 - 2967963



Plug-in miniature solid-state relay, power solid-state relay, 1 N/O contact, input: 60 V DC, output: 24 - 253 V AC/0.75  $^{\Delta}$ 

Phoenix Contact 2019 @ - all rights reserved http://www.phoenixcontact.com