

servo motor BMH - 3.3 Nm - 6000 rpm - keyed shaft - without brake - IP54

BMH1001P17A2A

! Discontinued on: 9 Feb 2023

① Discontinued

EAN Code: 3606485195803

Main

| Device short name | вмн | | | |
|---------------------------|--|--|--|--|
| Product or component type | Servo motor | | | |
| Maximum mechanical speed | 6000 rpm | | | |
| Continuous stall torque | 3.3 N.m for LXM32.D12N4 at 3 A, 400 V, three phase 3.3 N.m for LXM32.D12N4 at 3 A, 480 V, three phase 3.4 N.m for LXM32.D18N4 at 6 A, 400 V, three phase 3.4 N.m for LXM32.D18N4 at 6 A, 480 V, three phase | | | |
| Peak stall torque | 10.8 N.m for LXM32.D12N4 at 3 A, 400 V, three phase 10.8 N.m for LXM32.D12N4 at 3 A, 480 V, three phase 10.8 N.m for LXM32.D18N4 at 6 A, 400 V, three phase 10.8 N.m for LXM32.D18N4 at 6 A, 480 V, three phase | | | |
| Nominal output power | 800 W for LXM32.D12N4 at 3 A, 400 V, three phase 800 W for LXM32.D12N4 at 3 A, 480 V, three phase 1300 W for LXM32.D18N4 at 6 A, 400 V, three phase 1300 W for LXM32.D18N4 at 6 A, 480 V, three phase | | | |
| Nominal torque | 1.9 N.m for LXM32.D12N4 at 3 A, 400 V, three phase 1.9 N.m for LXM32.D12N4 at 3 A, 480 V, three phase 3.1 N.m for LXM32.D18N4 at 6 A, 400 V, three phase 3.1 N.m for LXM32.D18N4 at 6 A, 480 V, three phase | | | |
| Nominal speed | 4000 rpm for LXM32.D12N4 at 3 A, 400 V, three phase 4000 rpm for LXM32.D12N4 at 3 A, 480 V, three phase 4000 rpm for LXM32.D18N4 at 6 A, 400 V, three phase 4000 rpm for LXM32.D18N4 at 6 A, 480 V, three phase | | | |
| Product compatibility | LXM32.D12N4 at 400480 V three phase LXM32.D18N4 at 400480 V three phase | | | |
| Shaft end | Keyed | | | |
| IP degree of protection | IP54 standard | | | |
| Speed feedback resolution | 32768 points/turn x 4096 turns | | | |
| Holding brake | Without | | | |
| Mounting support | International standard flange | | | |
| Electrical connection | Rotatable right-angled connectors | | | |

Complementary

| Range compatibility | Lexium 32 |
|---------------------------|-------------|
| [Us] rated supply voltage | 480 V |
| Network number of phases | Three phase |
| Continuous stall current | 3.15 A |
| Continuous power | 1.76 W |

| Maximum current Irms | 11.9 A for LXM32.D12N4 11.9 A for LXM32.D18N4 | | | | |
|---------------------------------------|---|--|--|--|--|
| Maximum permanent current | 11.93 A | | | | |
| Second shaft | Without second shaft end | | | | |
| Shaft diameter | 19 mm | | | | |
| Shaft length | 40 mm | | | | |
| key width | 30 mm | | | | |
| Feedback type | Multiturn SinCos Hiperface | | | | |
| Motor flange size | 100 mm | | | | |
| Number of motor stacks | 1 | | | | |
| Torque constant | 1.1 N.m/A at 120 °C | | | | |
| Back emf constant | 70.3 V/krpm at 120 °C | | | | |
| Number of motor poles | 10 | | | | |
| Rotor inertia | 3.19 kg.cm ² | | | | |
| Stator resistance | 3.1 Ohm at 20 °C | | | | |
| Stator inductance | 13.9 mH at 20 °C | | | | |
| Stator electrical time constant | 4.5 ms at 20 °C | | | | |
| Maximum radial force Fr | 900 N at 1000 rpm 720 N at 2000 rpm 630 N at 3000 rpm 570 N at 4000 rpm 530 N at 5000 rpm | | | | |
| Maximum axial force Fa | 0.2 x Fr | | | | |
| type of cooling | Natural convection | | | | |
| Length | 128.6 mm | | | | |
| Centring collar diameter | 95 mm | | | | |
| centring collar depth | 3.5 mm | | | | |
| Number of mounting holes | 4 | | | | |
| Mounting holes diameter | 9 mm | | | | |
| Circle diameter of the mounting holes | 115 mm | | | | |
| Net weight | 3.34 kg | | | | |
| Sizing reference | BMH1001P | | | | |
| Network number of phases | 3 | | | | |
| Accuracy error [angular] | 4.8 ° | | | | |
| Temperature copper hot | 135 °C | | | | |
| Temperature magnet hot | 100 °C | | | | |
| Temperature magnet rt | 20 °C | | | | |

Packing Units

| Unit Type of Package 1 | PCE |
|------------------------------|-----------|
| Number of Units in Package 1 | 1 |
| Package 1 Height | 19.500 cm |
| Package 1 Width | 22.500 cm |

| Package 1 Length | 39.500 cm |
|------------------------------|-----------|
| Package 1 Weight | 4.585 kg |
| Unit Type of Package 2 | S04 |
| Number of Units in Package 2 | 2 |
| Package 2 Height | 30.000 cm |
| Package 2 Width | 40.000 cm |
| Package 2 Length | 60.000 cm |
| Package 2 Weight | 9.820 kg |
| Unit Type of Package 3 | P06 |
| Number of Units in Package 3 | 8 |
| Package 3 Height | 75.000 cm |
| Package 3 Width | 80.000 cm |
| Package 3 Length | 60.000 cm |
| Package 3 Weight | 47.280 kg |

Contractual warranty

Warranty 18 months



Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing "Use Better, Use Longer, Use Again" campaign to extend product lifetimes and recyclability.

Environmental Data explained >

How we assess product sustainability >

| ☑ Environmental footprint | | | | |
|---|-------------------------------|--|--|--|
| Carbon footprint (kg.eq.CO2 per CR, Total Life cycle) | 1435 | | | |
| Environmental Disclosure | Product Environmental Profile | | | |

Use Better

| Packaging made with recycled cardboard | Yes |
|--|--|
| Packaging without single use plastic | No |
| EU RoHS Directive | Pro-active compliance (Product out of EU RoHS legal scope) |
| SCIP Number | A7df881f-135f-4256-b8c2-ea55d4c9a151 |
| REACh Regulation | REACh Declaration |
| PVC free | Yes |

Use Again


| ○ Repack and remanufacture | | | | | |
|----------------------------|---|--|--|--|--|
| Circularity Profile | No need of specific recycling operations | | | | |
| Take-back | No | | | | |
| WEEE | The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins | | | | |

BMH1001P17A2A

Dimensions Drawings

Servo Motors Dimensions

Example with Straight Connectors

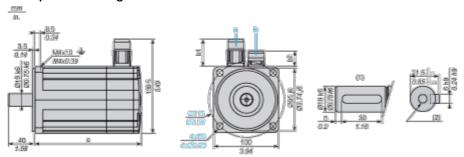

- a: Power supply for servo motor brake
- b: Power supply for servo motor encoder
- (1) Shaft end, keyed slot (optional)
- (2) For screw M6 x 21 mm/M6 x 0.83 in.

Dimensions in mm

| Straight c | onnectors | Rotatable angled connectors | | c (without brake) | a (with brake) |
|------------|-----------|-----------------------------|------|-------------------|----------------|
| b1 | b2 | b1 | b2 | c (without brake) | c (with brake) |
| 39.5 | 25.5 | 39.5 | 39.5 | 128 | 170 |

Dimensions in in


| Straight c | onnectors | Rotatable angled connectors | | c (without brake) | a (with hands) | |
|------------|-----------|-----------------------------|------|-------------------|----------------|--|
| b1 | b2 | b1 | b2 | c (without brake) | c (with brake) | |
| 1.55 | 1.00 | 1.55 | 1.55 | 5.03 | 6.69 | |

Performance Curves

400 V 3-Phase Supply Voltage


Torque/Speed Curves

Servo motor with LXM32•D12N4 servo drive



- X Speed in rpm
- Y Torque in Nm
- 1 Peak torque
- 2 Continuous torque

Servo motor with LXM32•D18N4 servo drive




- X Speed in rpm
- Y Torque in Nm
- 1 Peak torque
- 2 Continuous torque

480 V 3-Phase Supply Voltage


Torque/Speed Curves

Servo motor with LXM32•D12N4 servo drive



- X Speed in rpm
- Y Torque in Nm
- 1 Peak torque
- 2 Continuous torque

Servo motor with LXM32•D18N4 servo drive



- X Speed in rpm
- Y Torque in Nm
- 1 Peak torque
- 2 Continuous torque