Brand of NTN corporation

Technical data

71908CVUJ84

High precision angular contact ball bearings

High precision angular contact ball bearing, laminated resin cage centred on outer ring

VISUAL (S)

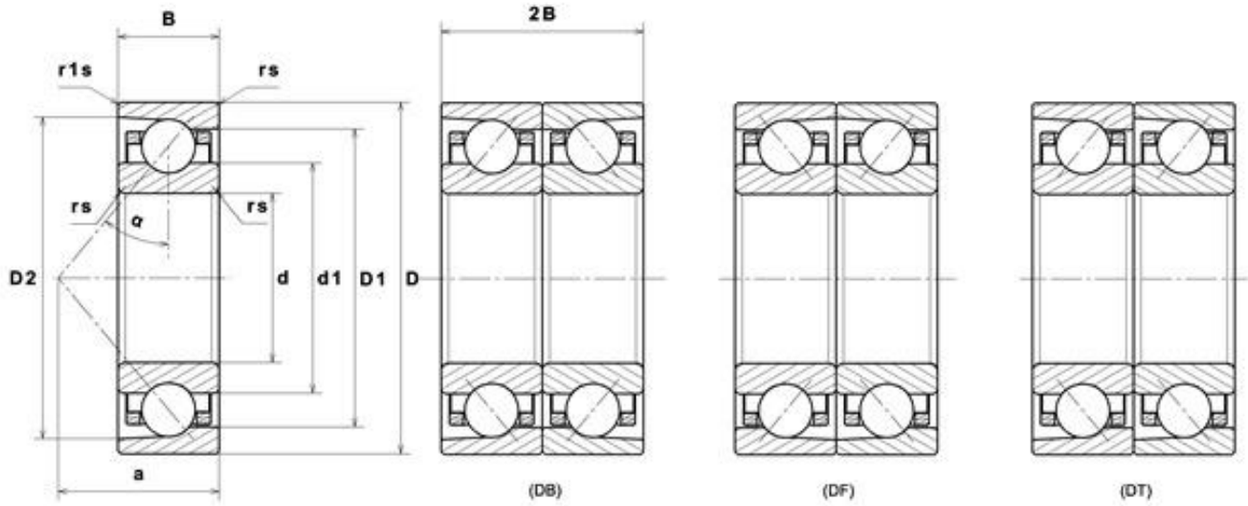

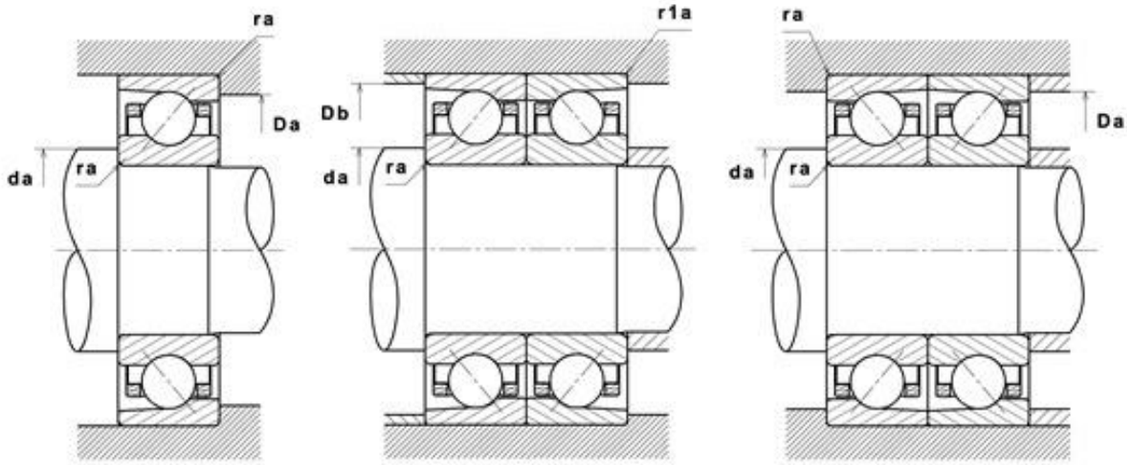

71908CVUJ84
High precision angular contact ball bearings

PRODUCT DEFINITION	
Brand	SNR
d - Internal diameter	40 mm
D - External diameter	62 mm
B - Bearing/Inner ring width	12 mm
d1 - External diameter inner ring	46,8 mm
D1 - Inner diameter outer ring	55,2 mm
D2 - Inner diameter outer ring	58,22 mm
a - Charge load application point	13 mm
- Contact angle	15 °
rs - Min fillet radius	0,6 mm
r1s - Min fillet radius	0,3 mm
Precision class	P4
Mass	0,11 kg

PRODUCT PERFORMANCE	
C - Dynamic load	14300000 mN
C0 - Static load	11800000 mN
Cu - Fatigue limit load	650000 mN
f0 - Coefficient	15.906
Axial displacement K Factor	1.34
Preload level	8
Preload value	230000 mN
Axial rigidity	76 N/µm
Radial rigidity	368 N/µm

71908CVUJ84
High precision angular contact ball bearings

PRODUCT PERFORMANCE	
Tmin - Min operating temperature	243,15 °K
Tmax - Max operating temperature	393,15 °K
N lim - Oil lubrication limit speed	204000 °/s
N lim - Grease lubrication limit speed	138000 °/s

BEARING FREQUENCIES	
BPFO - Over rolling frequency on outer ring (60 rpm)	8.357 Hz
BPFI - Over rolling frequency on inner (60 rpm)	10.643 Hz
BSF - Over rolling frequency on rolling element (60 rpm)	7.915 Hz
BRF - Rotational frequency – rolling element (60 rpm)	3.958 Hz
FTF - Rotational frequency - cage (60 rpm)	0.44 Hz

ABUTMENT	
da min - Min shoulder diameter IR	44,5 mm
db min - Min IR shoulder diameter	44,5 mm
Da max - Max shoulder diameter OR	57,5 mm
Db max - Max OR shoulder diameter	57,5 mm
r1a - Max fillet radius	0,3 mm
ra max - Max shaft & housing fillet radius	0,6 mm

71908CVUJ84
High precision angular contact ball bearings

INDUSTRY CALCUL FACTORS

Equivalent dynamic radial load

P = X.Fr + Y.Fa

Series		e	Single or DT bearing arrangement				DB or DF arrangement			
			Fa / Fr ≤ e		Fa / Fr > e		Fa / Fr ≤ e		Fa / Fr > e	
			X	Y	X	Y	X	Y	X	Y
70 (NTN & SNR) 72 (NTN & SNR) 78 (NTN) 79 (NTN) 719 (SNR)	15°	0.178	0.38	1	0	0.44	1.47	1	1.65	0.72	2.39
		0.357	0.4				1.4		1.57		2.28
		0.714	0.43				1.3		1.46		2.11
		1.07	0.46				1.23		1.38		2
		1.43	0.47				1.19		1.34		1.93
		2.14	0.5				1.12		1.26		1.82
		3.57	0.55				1.02		1.14		1.66
		5.35	0.56						1.12		1.63
		7.14	0.56				1		1.12		1.63
	25°		0.68			0.41	0.87		0.92	0.67	1.41
	30°		0.8			0.39	0.76		0.78	0.63	1.24

Equivalent static radial load

$P_o = X_o.Fr + Y_o.Fa$

Series		Single or DT bearing arrangement		DB or DF arrangement	
		X_0	Y_0	X_0	Y_0
70 (NTN & SNR) 72 (NTN & SNR) 78 (NTN) 79 (NTN) 719 (SNR)	15°	0.5	0.46	1	0.92
	25°		0.38		0.76
	30°		0.33		0.66

For single or DT bearing arrangement :

If Po <Fr, then use Po = Fr