SIEMENS

Data sheet 3KD2230-2ME10-0

Switch disconnector 32 A, Size 1, 3-pole Front operating mechanism left Basic unit without handle Box terminal



Model	
product brand name	SENTRON
product designation	3KD switch disconnector
design of the product	Switch
display version / for switch position indicator door-	ON-OFF
coupling rotary operating mechanism	
design of the operating mechanism	Without handle
type of the driving mechanism	Front operating mechanism
type of the driving mechanism / motor drive	No

General technical data	
number of poles	3
type of device	fixed mounting
size of switch disconnector	1
mechanical service life (switching cycles) / typical	15 000
electrical endurance (switching cycles)	
• at AC-23 A / at 690 V	6 000
• at DC-23 A / at 440 V	1 500

 I2t value / with closed switch / at 1000 V / for combination switch +gG/aM SITOR fuse / maximum 	2 331 A²·s
 I2t value / of the fuse / at 500 V / maximum permissible 	26 505 A²·s
• I2t value / of the gG fuse / at 690 V / maximum permissible	24 005 A²·s
 I2t value / of the gG/aM SITOR fuse / at 1000 V / maximum permissible 	6 000 A²-s
 I2t value / of the molded case circuit breaker / at 415 V / maximum permissible 	480 000 A²·s
position / of the switch operating mechanism	at the left end
overvoltage in percent / relative to the operating voltage / at AC / at 400, 500, 690 V / at 50/60 Hz	10 %
overvoltage category	III
degree of pollution	3
Voltage	
operating voltage / with current paths in series	
with degree of pollution 2 / at DC / rated value	440 V / 3
with degree of pollution 3 / at DC / rated value	440 V / 3
insulation voltage	
• rated value	1 000 V
surge voltage resistance / rated value	8 kV
Supply voltage	
operating current / at AC / rated value	32 A
operating voltage	
• at AC / at 50/60 Hz / rated value	1 000 V
Protection class	
protection class IP	IP20
protection class IP	
with closed switch / with cover or cable lug	IP20
cover	lines.
• on the front	IP20
Dissipation	
power loss [W]	
 with conventional rated thermal current / per pole 	0.4 W
 with conventional rated thermal current / per device 	1.2 W
• for rated value of the current / at AC / in hot operating state / per pole	0.4 W
Current	

• operating current / at AC-23 A / at 690 V / rated value	32 A
• operating current / at AC-23 A / at 500 V / rated value	32 A
• operating current / at AC-23 A / at 400 V / rated value	32 A
• operating current / at AC-22 A / at 690 V / rated value	32 A
• operating current / at AC-22 A / at 500 V / rated value	32 A
• operating current / at AC-22 A / at 400 V / rated value	32 A
• operating current / at AC-20 A / at 1000 V / maximum	32 A
• operating current / at AC-21 A / at 400 V / rated value	32 A
• operating current / at AC-21 A / at 500 V / rated value	32 A
• operating current / at AC-21 A / at 690 V / rated value	32 A
 operating current / at AC-23 A / at 500 V / at 50/60 Hz / rated value / maximum 	32 A
• operating current / at AC-22 A / at 500 V / at 50/60 Hz / rated value / maximum	32 A
• operating current / at AC-22 A / at 400 V / at 50/60 Hz / rated value / maximum	32 A
• operating current / at AC-22 A / at 690 V / at 50/60 Hz / rated value / maximum	32 A
• operating current / at AC-23 A / at 400 V / at 50/60 Hz / rated value / maximum	32 A
• operating current / at AC-23 A / at 690 V / at 50/60 Hz / rated value / maximum	32 A
• operating current / at DC-20 A / at 1000 V / maximum	32 A / 1
• operating current / at DC-23 A / at 440 V / rated value / note	32 A / 3
• operating current / at DC-23 A / at 220 V / rated value / note	32 A / 2
• operating current / at DC-22 A / at 440 V / rated value / note	32 A / 3
• operating current / at DC-22 A / at 220 V / rated value / note	32 A / 2
• operating current / at DC-21 A / at 440 V / rated value / note	32 A / 3

 operating current / at DC-21 A / at 220 V / rated value 	32 A / 2
continuous current / of upstream fuse / at 500 V and 690 V / rated value	100 A
continuous current / of upstream fuse / at 1000 V / rated value	100 A
continuous current / of upstream molded case circuit breaker / at 415 V / rated value	100 A
operating current / at DC / rated value	32 A
let-through current / of the fuse / at 500 V / maximum permissible	12 500 A
let-through current / of the gG fuse / at 690 V / maximum permissible	14 700 A
let-through current / of the gG/aM SITOR fuse / at 1000 V / maximum permissible	4 700 A
let-through current / of the molded case circuit breaker / at 415 V / maximum permissible	20 000 A
Main circuit	
operating power	
• at AC-23 A / at 400 V / at 50/60 Hz / rated value	15 kW
• at AC-23 A / at 500 V / rated value	18.5 kW
• at AC-23 A / at 690 V / at 50/60 Hz / rated value	30 kW
operating current / rated value	32 A
Auxiliary circuit	
Auxiliary circuit number of connected NC contacts / for auxiliary contacts	0
number of connected NC contacts / for auxiliary	0
number of connected NC contacts / for auxiliary contacts number of connected NO contacts / for auxiliary	
number of connected NC contacts / for auxiliary contacts number of connected NO contacts / for auxiliary contacts number of connected CO contacts / for auxiliary	0
number of connected NC contacts / for auxiliary contacts number of connected NO contacts / for auxiliary contacts number of connected CO contacts / for auxiliary contacts number of CO contacts / for auxiliary contacts number of NC contacts / for auxiliary contacts	0
number of connected NC contacts / for auxiliary contacts number of connected NO contacts / for auxiliary contacts number of connected CO contacts / for auxiliary contacts number of CO contacts / for auxiliary contacts	0 0 4
number of connected NC contacts / for auxiliary contacts number of connected NO contacts / for auxiliary contacts number of connected CO contacts / for auxiliary contacts number of CO contacts / for auxiliary contacts number of NC contacts / for auxiliary contacts	0 0 4 0
number of connected NC contacts / for auxiliary contacts number of connected NO contacts / for auxiliary contacts number of connected CO contacts / for auxiliary contacts number of CO contacts / for auxiliary contacts number of NC contacts / for auxiliary contacts number of NO contacts / for auxiliary contacts	0 0 4 0
number of connected NC contacts / for auxiliary contacts number of connected NO contacts / for auxiliary contacts number of connected CO contacts / for auxiliary contacts number of CO contacts / for auxiliary contacts number of NC contacts / for auxiliary contacts number of NO contacts / for auxiliary contacts Suitability	0 0 4 0
number of connected NC contacts / for auxiliary contacts number of connected NO contacts / for auxiliary contacts number of connected CO contacts / for auxiliary contacts number of CO contacts / for auxiliary contacts number of NC contacts / for auxiliary contacts number of NO contacts / for auxiliary contacts Suitability suitability for use	0 0 4 0 0 0
number of connected NC contacts / for auxiliary contacts number of connected NO contacts / for auxiliary contacts number of connected CO contacts / for auxiliary contacts number of CO contacts / for auxiliary contacts number of NC contacts / for auxiliary contacts number of NO contacts / for auxiliary contacts Suitability suitability suitability for use • main switch	0 0 4 0 0 0
number of connected NC contacts / for auxiliary contacts number of connected NO contacts / for auxiliary contacts number of connected CO contacts / for auxiliary contacts number of CO contacts / for auxiliary contacts number of NC contacts / for auxiliary contacts number of NO contacts / for auxiliary contacts Suitability suitability suitability for use main switch switch disconnector	0 0 4 0 0 0
number of connected NC contacts / for auxiliary contacts number of connected NO contacts / for auxiliary contacts number of connected CO contacts / for auxiliary contacts number of CO contacts / for auxiliary contacts number of NC contacts / for auxiliary contacts number of NO contacts / for auxiliary contacts Suitability suitability suitability for use main switch switch disconnector EMERGENCY OFF switch	0 0 4 0 0 0 Ves Yes Yes
number of connected NC contacts / for auxiliary contacts number of connected NO contacts / for auxiliary contacts number of connected CO contacts / for auxiliary contacts number of CO contacts / for auxiliary contacts number of NC contacts / for auxiliary contacts number of NO contacts / for auxiliary contacts Suitability suitability suitability for use main switch switch disconnector EMERGENCY OFF switch safety switch	0 0 4 0 0 0 Yes Yes Yes Yes
number of connected NC contacts / for auxiliary contacts number of connected NO contacts / for auxiliary contacts number of connected CO contacts / for auxiliary contacts number of CO contacts / for auxiliary contacts number of NC contacts / for auxiliary contacts number of NO contacts / for auxiliary contacts suitability suitability suitability for use main switch switch disconnector EMERGENCY OFF switch safety switch maintenance/repair switch	0 0 4 0 0 0 Ves Yes Yes Yes Yes

• trip indicator	No
voltage trigger	No
• undervoltage release	No
 undervoltage release with leading contact 	No
product extension / auxiliary switch	Yes
product extension / optional	
• motor drive	No
 voltage trigger 	No
Short circuit	

Short circuit	
short-time withstand current (Icw) / at AC 1000 V/DC 440 V / limited to 1 s / rated value	3 kA
short-circuit current making capacity (Icm)	
 for switch disconnector / at 1000 V AC / without fuse link / rated value / minimum 	7 kA
 for switch disconnector / at DC 440 V / without fuse link / rated value / minimum 	7 kA
 for switch disconnector / without fuse link / rated value / minimum 	7 kA
conditional short-circuit current / with line-side fuse protection	
 at 415 V / by molded case circuit breaker / rated value 	36 kA
• at 500 V / by gG fuse / rated value	100 kA
• at 690 V / by gG fuse / rated value	100 kA

Connections	
type of connectable conductor cross-sections	
with flexible busbar	2x (0,8x9 mm²)
type of connectable conductor cross-sections	
• for copper busbar	'1 x (2 x 9 mm²)
type of connectable conductor cross-sections / for	
copper conductor	
• solid	1x (1 16 mm²)
 finely stranded / with core end processing 	1x (1 35 mm²)
• stranded	1x (6 35 mm²)
type of electrical connection	
• for main current circuit	box terminal

Mechanical Design	
height	119 mm
width	94 mm
depth	68 mm
mounting type	Screw fixing and standard rail mounting 35 mm
mounting type	

• front mounting with 4-hole attachment	No
 front mounting with central attachment 	No
• rail mounting	Yes
mounting position	any
net weight	783 g

Environmental conditions	
ambient temperature / during operation	
• minimum	-25 °C
• maximum	70 °C
ambient temperature / during storage	
• minimum	-50 °C
• maximum	80 °C

Certificates

reference code

• acc. to DIN EN 61346-2

• acc. to DIN EN 81346-2 Q

General Product Approval	Declaration of	Shipping Ap-	other
	Conformity	proval	

Q





Miscellaneous





Miscellaneous

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

http://www.siemens.com/lowvoltage/catalogs

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3KD2230-2ME10-0

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3KD2230-2ME10-0


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...) http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3KD2230-2ME10-0


CAx-Online-Generator


http://www.siemens.com/cax


Tender specifications

http://www.siemens.com/specifications

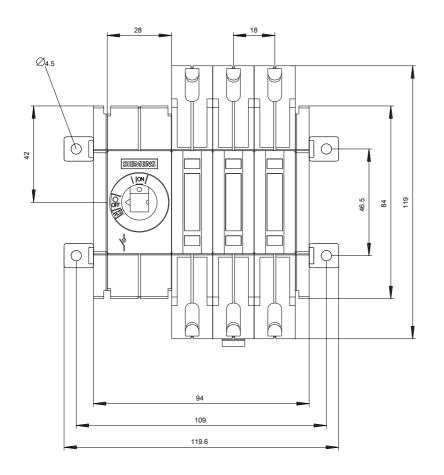

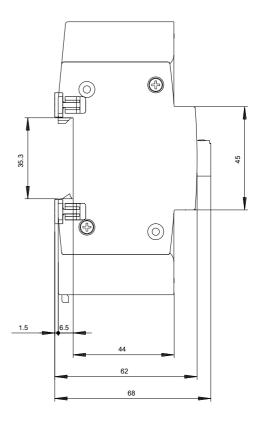

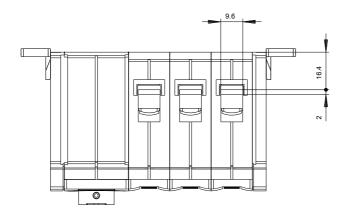

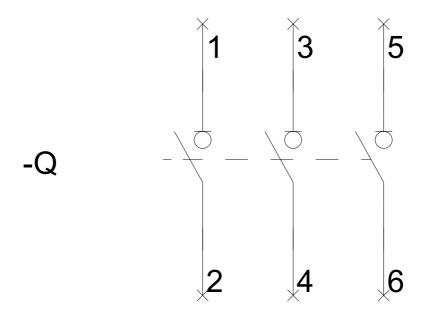

-CR

