


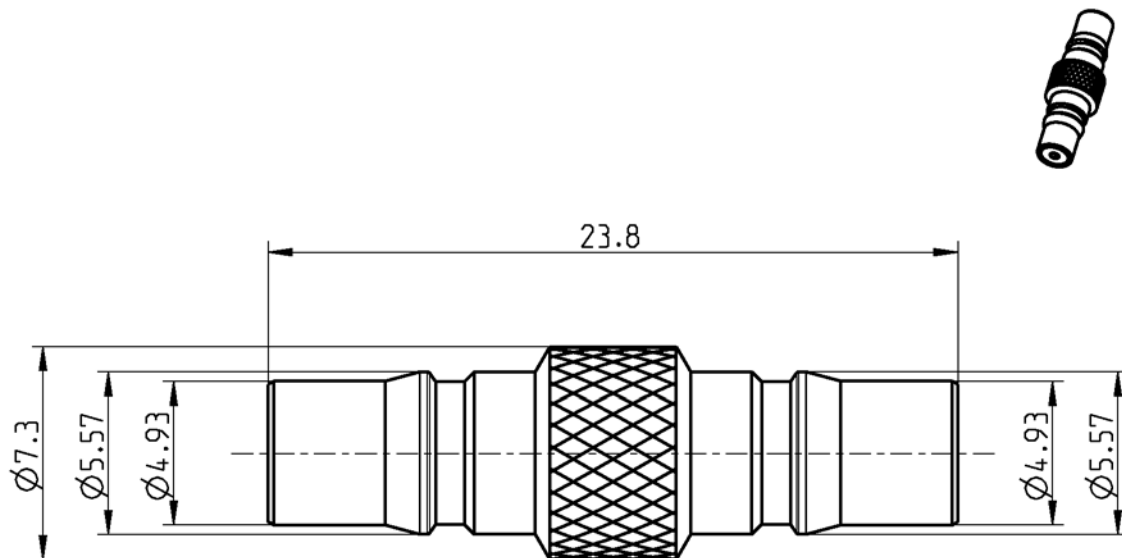

All dimensions are in mm; tolerances according to ISO 2768 m-H

Interface

According to

Rosenberger 28K000-000, series QMA
Rosenberger is an authorised QLF® manufacturer

Documents

N/A

Material and plating

Connector parts

Center contact
Outer contact
Body
Dielectric

Material

Beryllium copper
Brass
Brass
PTFE

Plating

AuroDur, gold plated
White bronze(e.g. Optalloy®)
White bronze(e.g. Optalloy®)

**ADAPTOR
QMA JACK -JACK**
28K101-K00N5
Electrical data

Impedance	50 Ω
Frequency	DC to 18 GHz
Return loss	≥ 32 dB, DC to 3 GHz ≥ 28 dB, 3 to 6 GHz
Insertion loss	$\leq 0.05 \times \sqrt{f(\text{GHz})}$ dB, DC to 6 GHz
Insulation resistance	$\geq 5 \times 10^3$ M Ω
Center contact resistance	≤ 3 m Ω
Outer contact resistance	≤ 2.5 m Ω
Test voltage, at sea level, 50Hz	1000 V rms
Working voltage, at sea level, 50Hz	480 V rms
RF-leakage	≥ 95 dB up to 2 GHz ≥ 80 dB up to 4 GHz ≥ 70 dB up to 6 GHz
Intermodulation (3 rd order)	≤ -120 dBc @ 2 x 20 W

Mechanical data

Mating cycles	min. 100
Center contact captivation: axial	≥ 20 N
Engagement force	typ. 25 N
Disengagement force	typ. 20 N
Retention force for interface	60 N min.

Environmental data

Temperature range	-40°C to +85°C
Storage temperature	-40°C to +85°C
Thermal shock	IEC 60169-1 16.4 (-40 / +85°C)
Corrosion	IEC 60169-1 16.7 (48 hrs)
Vibration	IEC 60068-2-64 random
Damp heat, steady state	IEC 60169-1 16.3 (96 hrs)
2002/95/EC (RoHS)	compliant

Tooling

N/A

Suitable cables

N/A

Packing

Standard	1 pce in box
Weight	3.2 g/pce

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Draft	Date	Approved	Date	Rev.	Engineering change number	Name	Date
Inge Mühlauser	05/10/04	M. Schmid	27.06.07	c00	07-0154	Krautenbacher S.	27.06.07

Rosenberger Hochfrequenztechnik GmbH & Co. KG
P.O.Box 1260 D-84526 Tittmoning Germany
www.rosenberger.de

Tel.: +49 8684 18-0
Fax: +49 8684 18-499
email: info@rosenberger.de

Page
2 / 2