


# MMBT3906T

## PNP Epitaxial Silicon Transistor

### Features

- General purpose amplifier transistor.
- Ultra-Small Surface Mount Package for all types.
- Suitable for general switching & amplification
- Well suited for portable application
- As complementary type, NPN MMBT3904T is recommended



### Absolute Maximum Ratings $T_a = 25^\circ\text{C}$ unless otherwise noted

| Symbol    | Parameter                 | Value     | Unit             |
|-----------|---------------------------|-----------|------------------|
| $V_{CBO}$ | Collector-Base Voltage    | -40       | V                |
| $V_{CEO}$ | Collector-Emitter Voltage | -40       | V                |
| $V_{EBO}$ | Emitter-Base Voltage      | -5        | V                |
| $I_C$     | Collector Current         | 200       | mA               |
| $T_J$     | Junction Temperature      | 150       | $^\circ\text{C}$ |
| $T_{STG}$ | Storage Temperature Range | -55 ~ 150 | $^\circ\text{C}$ |

- \* 1. These ratings are limiting values above which the serviceability of any semiconductor device may be impaired.  
2. These are steady state limits. The factory should be consulted on applications involving pulsed or low duty cycle operations.

### Thermal Characteristics\* $T_a = 25^\circ\text{C}$ unless otherwise noted

| Symbol          | Parameter                                       | Max | Unit                      |
|-----------------|---|-----|---------------------------|
| $P_C$           | Collector Power Dissipation, by $R_{\theta JA}$ | 250 | mW                        |
| $R_{\theta JA}$ | Thermal Resistance, Junction to Ambient         | 500 | $^\circ\text{C}/\text{W}$ |

\* Minimum land pad.

### Electrical Characteristics\* $T_a = 25^\circ\text{C}$ unless otherwise noted

| Symbol        | Parameter                            | Test Condition  | Min.                        | Max.           | Unit   |
|---------------|--------------------------------------|---|-----------------------------|----------------|--------|
| $BV_{CBO}$    | Collector-Base Breakdown Voltage     | $I_C = -10\mu\text{A}, I_E = 0$   | -40                         |                | V      |
| $BV_{CEO}$    | Collector-Emitter Breakdown Voltage  | $I_C = -1\text{mA}, I_B = 0$  | 40                          |                | V      |
| $BV_{EBO}$    | Emitter-Base Breakdown Voltage       | $I_E = -10\mu\text{A}, I_C = 0$   | -5                          |                | V      |
| $I_{CEX}$     | Collector Cut-off Current            | $V_{CE} = -30\text{V}, V_{EB(OFF)} = -0.3\text{V}$  |                             | -50            | nA     |
| $h_{FE}$      | DC Current Gain                      | $V_{CE} = 1\text{V}, I_C = -0.1\text{mA}$<br>$V_{CE} = 1\text{V}, I_C = -1\text{mA}$<br>$V_{CE} = 1\text{V}, I_C = -10\text{mA}$<br>$V_{CE} = 1\text{V}, I_C = -50\text{mA}$<br>$V_{CE} = 1\text{V}, I_C = -100\text{mA}$ | 60<br>80<br>100<br>60<br>30 | 300            |        |
| $V_{CE(sat)}$ | Collector-Emitter Saturation Voltage | $I_C = -10\text{mA}, I_B = -1\text{mA}$<br>$I_C = -50\text{mA}, I_B = -5\text{mA}$  |                             | -0.25<br>-0.4  | V<br>V |
| $V_{BE(sat)}$ | Base-Emitter Saturation Voltage      | $I_C = -10\text{mA}, I_B = -1\text{mA}$<br>$I_C = -50\text{mA}, I_B = -5\text{mA}$  | -0.65                       | -0.85<br>-0.95 | V<br>V |
| $f_T$         | Current Gain Bandwidth Product       | $V_{CE} = -20\text{V}, I_C = -10\text{mA}, f = 100\text{MHz}$   | 250                         |                | MHz    |
| $C_{ob}$      | Output Capacitance                   | $V_{CB} = -5\text{V}, I_E = 0, f = 1\text{MHz}$   |                             | 7.0            | pF     |
| $C_{ib}$      | Input Capacitance                    | $V_{EB} = -0.5\text{V}, I_C = 0, f = 1\text{MHz}$   |                             | 15             | pF     |
| $t_d$         | Delay Time                           | $V_{CC} = -3\text{V}, I_C = -10\text{mA}$   |                             | 35             | ns     |
| $t_r$         | Rise Time                            | $I_{B1} = - I_{B2} = -1\text{mA}$   |                             | 35             | ns     |
| $t_s$         | Storage Time                         |   |                             | 225            | ns     |
| $t_f$         | Fall Time                            |   |                             | 75             | ns     |

\* DC Item are tested by Pulse Test : Pulse Width $\leq$ 300us, Duty Cycle $\leq$ 2%

Typical Performance Characteristics

Figure 1. DC Current Gain

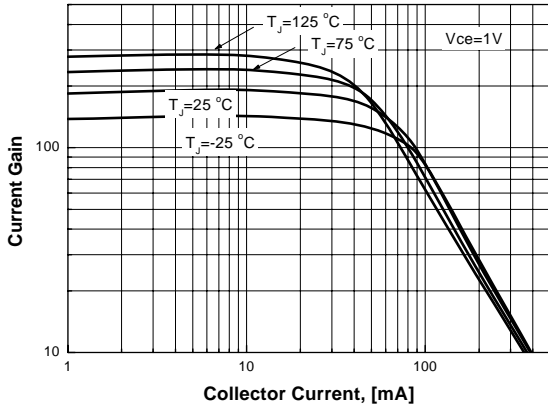


Figure 2. Collector-Emitter Saturation Voltage

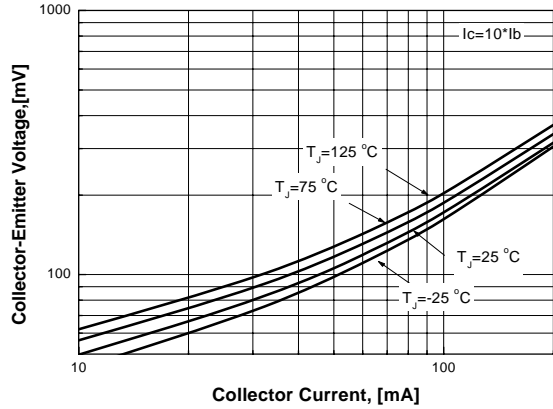


Figure 3. Base- Emitter Saturation Voltage

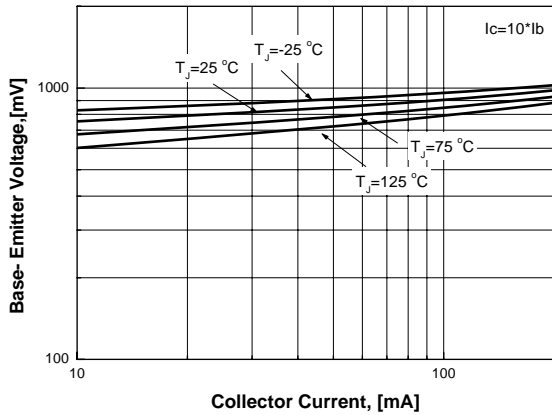


Figure 4. Collector- Base Leakage Current

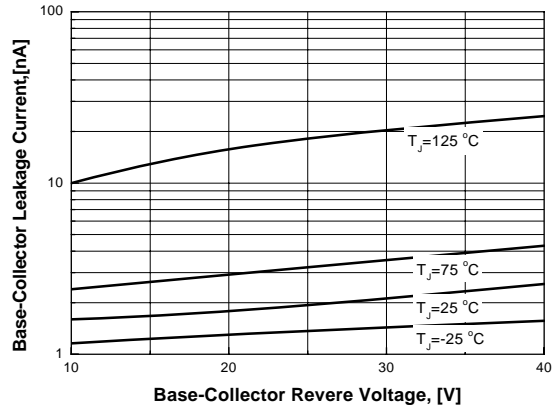


Figure 5. Collector- Base Capacitance


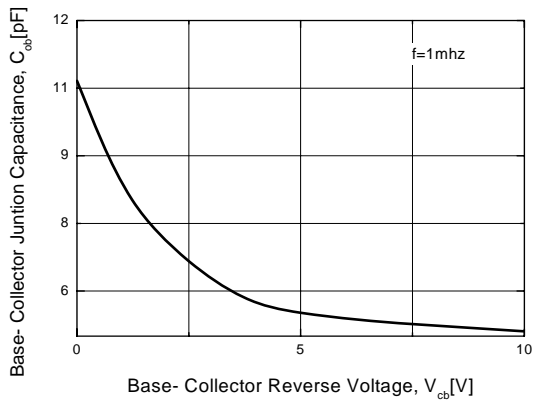



Figure 6. Power Derating

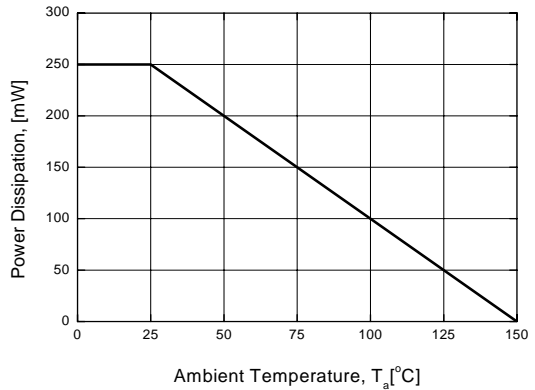

# Package Dimensions

## SOT-523F

- Case : SOT-523F
- Case Material(Molded Plastic): KTMC1060SC
- UL Flammability classification rating : "V0"
- Moisture Sensivity level per JESD22-A1113B : MSL 1
- Lead terminals solderable per MIL-STD7502026 /JESD22A121
- Lead Free Plating : Pure Tin(Matte)

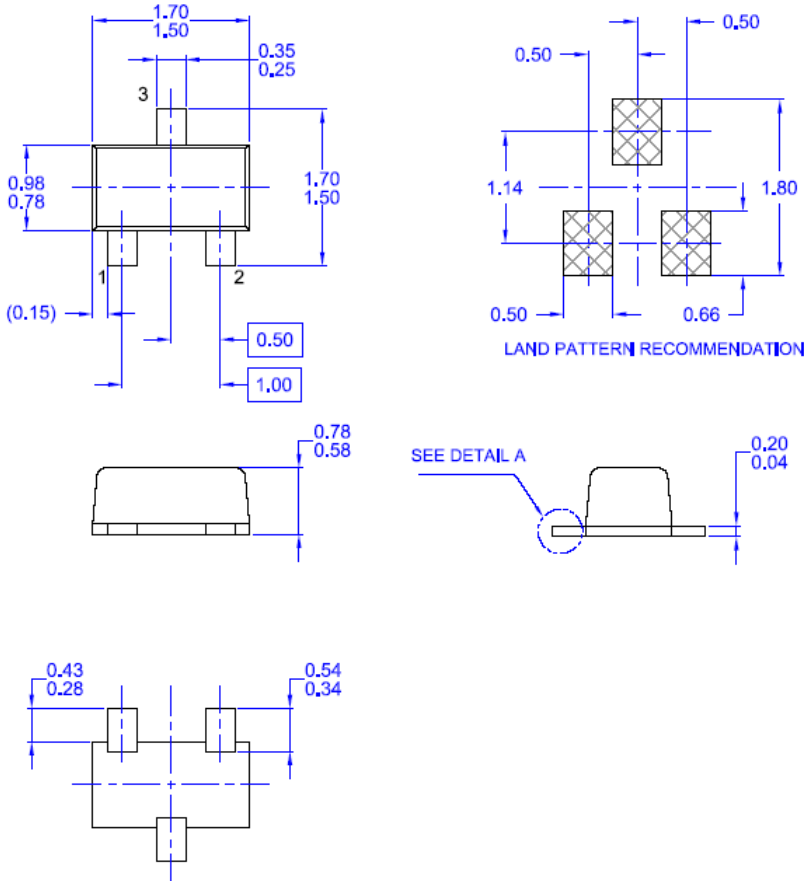


Dimensions in Millimeters



## TRADEMARKS

The following are registered and unregistered trademarks and service marks Fairchild Semiconductor owns or is authorized to use and is not intended to be an exhaustive list of all such trademarks.

|                                      |  |  |                                  |
|--------------------------------------|--|--|----------------------------------|
| ACEx <sup>®</sup>                    | Green FPS <sup>™</sup>   | Power247 <sup>®</sup>                  | SuperSOT <sup>™</sup> -8         |
| Build it Now <sup>™</sup>            | Green FPS <sup>™</sup> e-Series <sup>™</sup>   | POWEREDGE <sup>®</sup>                 | SyncFET <sup>™</sup>             |
| CorePLUS <sup>™</sup>                | GTO <sup>™</sup>   | Power-SPM <sup>™</sup>                 | The Power Franchise <sup>®</sup> |
| CROSSVOLT <sup>™</sup>               | <i>i-Lo</i> <sup>™</sup>   | PowerTrench <sup>®</sup>               | the power franchise              |
| CTL <sup>™</sup>                     | IntelliMAX <sup>™</sup>  | Programmable Active Droop <sup>™</sup> | TinyBoost <sup>™</sup>           |
| Current Transfer Logic <sup>™</sup>  | ISOPLANAR <sup>™</sup>   | QFET <sup>®</sup>                      | TinyBuck <sup>™</sup>            |
| EcoSPARK <sup>®</sup>                | MegaBuck <sup>™</sup>  | QS <sup>™</sup>                        | TinyLogic <sup>®</sup>           |
| <b>F</b> <sup>®</sup>                | MICROCOUPLER <sup>™</sup>  | QT Optoelectronics <sup>™</sup>        | TINYOPTO <sup>™</sup>            |
| Fairchild <sup>®</sup>               | MicroFET <sup>™</sup>  | Quiet Series <sup>™</sup>              | TinyPower <sup>™</sup>           |
| Fairchild Semiconductor <sup>®</sup> | MicroPak <sup>™</sup>  | RapidConfigure <sup>™</sup>            | TinyPWM <sup>™</sup>             |
| FACT Quiet Series <sup>™</sup>       | MillerDrive <sup>™</sup>   | SMART START <sup>™</sup>               | TinyWire <sup>™</sup>            |
| FACT <sup>®</sup>                    | Motion-SPM <sup>™</sup>  | SPM <sup>®</sup>                       | μSerDes <sup>™</sup>             |
| FAST <sup>®</sup>                    | OPTOLOGIC <sup>®</sup>   | STEALTH <sup>™</sup>                   | UHC <sup>®</sup>                 |
| FastvCore <sup>™</sup>               | OPTOPLANAR <sup>®</sup>  | SuperFET <sup>™</sup>                  | UniFET <sup>™</sup>              |
| FPST <sup>™</sup>                    |  <sup>®</sup> | SuperSOT <sup>™</sup> -3               | VCX <sup>™</sup>                 |
| FRFET <sup>®</sup>                   | PDP-SPM <sup>™</sup>   | SuperSOT <sup>™</sup> -6               |                                  |
| Global Power Resource <sup>SM</sup>  | Power220 <sup>®</sup>  |  |                                  |

## DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION, OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS. THESE SPECIFICATIONS DO NOT EXPAND THE TERMS OF FAIRCHILD'S WORLDWIDE TERMS AND CONDITIONS, SPECIFICALLY THE WARRANTY THEREIN, WHICH COVERS THESE PRODUCTS.

## LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.

As used herein:

- Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.
- A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

## PRODUCT STATUS DEFINITIONS

### Definition of Terms

| Datasheet Identification | Product Status         | Definition   |
|--------------------------|------------------------|--|
| Advance Information      | Formative or In Design | This datasheet contains the design specifications for product development. Specifications may change in any manner without notice.   |
| Preliminary              | First Production       | This datasheet contains preliminary data; supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve design. |
| No Identification Needed | Full Production        | This datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve design.   |
| Obsolete                 | Not In Production      | This datasheet contains specifications on a product that has been discontinued by Fairchild semiconductor. The datasheet is printed for reference information only.                                      |