

1467144

https://www.phoenixcontact.com/gb/products/1467144

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



M23, Coupler connector, series: M23 PRO, straight, shielded: yes, for standard and ONECLICK fast locking system, No. of pos.: 12, Direction of rotation: Standard, contact connection type: Pin, Solder connection, cable diameter range: 3 mm ... 15 mm, coding: N, Item is lead-free in accordance with RoHS II without Exemption 6c (Pb < 0.1 %)

Your advantages

- · Solutions with cross-manufacturer compatibility for standard and fast locking systems
- · Modern, consistent design for highly convenient operation
- Easy, cost-effective cable assembly: uniform shielding of M17 to M40

Commercial data

Item number	1467144
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	ABRBHI
Product key	ABRABG
GTIN	4063151862671
Weight per piece (including packing)	119.3 g
Weight per piece (excluding packing)	103.391 g
Customs tariff number	85366990
Country of origin	DE



1467144

https://www.phoenixcontact.com/gb/products/1467144

Technical data

Notes

Notes on operation	Please observe the derating curve.			
Safety note				
Safety note	WARNING: The connectors may not be plugged in or disconnected under load. Ignoring the warning or improper use may damage persons and/or property.			
	 WARNING: Commission properly functioning products only. The products must be regularly inspected for damage. Decommission defective products immediately. Replace damaged products. Repairs are not possible. 			
	WARNING: Only electrically qualified personnel may install and operate the product. They must observe the following safety notes. The qualified personnel must be familiar with the basics of electrical engineering. They must be able to recognize and prevent danger. The relevant symbol on the packaging indicates that only personnel familiar with electrical engineering are allowed to install and operate the product.			
	The products are suitable for applications in plant, controller, and electrical device engineering.			
	 When operating the connectors in outdoor applications, they must be separately protected against environmental influences. 			
	 Assembled products may not be manipulated or improperly opened. 			
	 Only use mating connectors that are specified in the technical data of the standards listed (e.g. the ones listed in the product accessories online at phoenixcontact.com/products). 			
	 When using the product in direct connection with third-party manufacturers, the user is responsible. 			
	 For operating voltages > 50 V AC, conductive connector housings must be grounded 			
	 Ensure that the protective or functional ground has been properly connected. 			
	 VDE 0100/1.97 § 411.1.3.2 and DIN EN 60 204/11.98 § 14.1.3 are applicable when combining several circuits in a cable and/or connector 			
	Only use tools recommended by Phoenix Contact			
	 The installation notes/Design In documents online on the download page at phoenixcontact.com/products must be observed for this product. 			
	 Operate the connector only when it is fully plugged in and interlocked. 			
	 Ensure that when laying the cable, the tensile load on the connectors does not exceed the upper limit specified in the standards. 			
	 Observe the minimum bending radius of the cable. Lay the cable without twisting it. 			
	 The connector warms up in normal operation. Depending on the ambient conditions, the surface of the connector can continue to warm up. In this case, the user is responsible for posting 			



1467144

https://www.phoenixcontact.com/gb/products/1467144

	warnings (e.g. DIN EN ISO 13732-1:2008-12).
ct properties	
roduct type	Circular connector (cable-side)
	(1111)
ector	
lating body	
oding	N
ontact material	CuZn
ontact material	Ni/Au
sertion/withdrawal cycles	100
onnection method	Solder connection
ontact switching type	Pin
pplication	Signal
umber of positions	12
irection of rotation	Standard
onnection profile	12
umber Contact (Signal contacts)	12
iameter Contact (Signal contacts)	1 mm
tz wire cross-section min. Contact (Signal contacts)	0.08 mm²
tz wire cross-section max. Contact (Signal contacts)	1 mm²
ominal current per signal contact	8 A (for max. connection cross section)
ated voltage Contact (Signal contacts)	150 V
ated surge voltage	2.5 kV
vervoltage category	III
egree of pollution	3
estallation height	2000 m
sing	
hread type	M23
ype of locking	for standard and ONECLICK fast locking system
g screw connection	none
ousing material	GD-Zn
	IP66/IP68 (2 m / 24 h)
egree of protection (plugged in)	
egree of protection (plugged in)	
	3 mm 15 mm (Universal gasket)




https://www.phoenixcontact.com/gb/products/1467144



Drawings

Schematic diagram

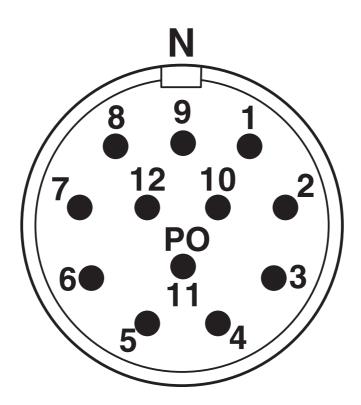

Contact chamber numbering (view of plug-in side), standard pin



1467144

https://www.phoenixcontact.com/gb/products/1467144

Approvals

To download certificates, visit the product detail page: https://www.phoenixcontact.com/gb/products/1467144

CUL Recognized Approval ID: E335019-20141210				
	Nominal voltage $\mathbf{U}_{\mathbf{N}}$	Nominal current I _N	Cross section AWG	Cross section mm ²
	150 V	5 A	- 18	-

71	UL Recognized Approval ID: E335019-20	UL Recognized Approval ID: E335019-20141210				
		Nominal voltage U _N	Nominal current I _N	Cross section AWG	Cross section mm ²	
		150 V	6 A	- 18	-	



1467144

https://www.phoenixcontact.com/gb/products/1467144

Classifications

ECLASS

	ECLASS-13.0	27440116		
ΕΊ	ETIM			
	ETIM 9.0	EC002635		



1467144

https://www.phoenixcontact.com/gb/products/1467144

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions		
China RoHS			
Environment friendly use period (EFUP)	EFUP-E		
	No hazardous substances above the limits		
EU REACH SVHC			
REACH candidate substance (CAS No.)	No substance above 0.1 wt%		

Phoenix Contact 2025 @ - all rights reserved https://www.phoenixcontact.com

PHOENIX CONTACT Ltd Halesfield 13, Telford Shropshire, TF7 4PG 01952 681700 info@phoenixcontact.co.uk