



Brand of NTN corporation

Technical data

6207F604


Single row deep groove ball bearings



TOPLINE deep groove ball bearing, radial contact, pressed steel cage, shields on both sides, applications up to 350°C.

TOPLINE

VISUAL (S)

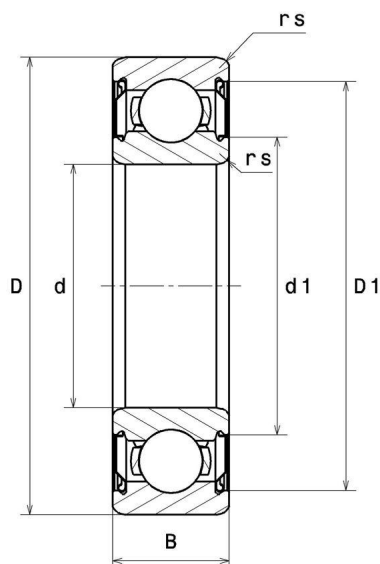


NTN Europe

1 rue des Usines · BP 2017 · 74010 Annecy Cedex · France · Tel. +33 (0)4 50 65 30 00
S.A. au capital de 322 639 919 € · RCS ANNECY B 325 821 072 · Id. Fiscale : FR 48 325 821 072
SIRET 325 821 072 00015 · Code APE 2815 Z · Code NACE 28.15

6207F604

Single row deep groove ball bearings

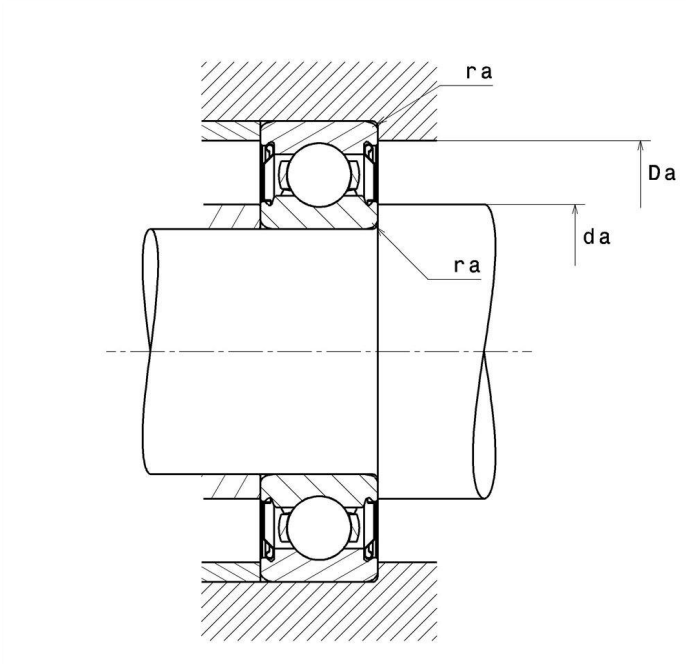

PRODUCT DEFINITION	
Brand	SNR
d - Internal diameter	35 mm
D - External diameter	72 mm
B - Bearing/Inner ring width	17 mm
d1 - External diameter inner ring	44 mm
D1 - Inner diameter outer ring	62,7 mm
rs - Min fillet radius	1,1 mm
Radial clearance class	> C5
Mass	0,27 kg

PRODUCT PERFORMANCE	
C0 - Static load	15300000 mN
f0 - Coefficient	13.8
N lim - Mechanical Limit Speed	480 °/s

6207F604

Single row deep groove ball bearings

PRODUCT PERFORMANCE

Tmin - Min operating temperature	243,15 °K
Tmax - Max operating temperature	623,15 °K

BEARING FREQUENCIES

BPFO - Over rolling frequency on outer ring (60 rpm)	3.565 Hz
BPFI - Over rolling frequency on inner (60 rpm)	5.435 Hz
BSF - Over rolling frequency on rolling element (60 rpm)	4.606 Hz
BRF - Rotational frequency - rolling element (60 rpm)	2.303 Hz
FTF - Rotational frequency - cage (60 rpm)	0.396 Hz

ABUTMENT

da min - Min shoulder diameter IR	41,5 mm
da max - Max shoulder diameter IR	44 mm
Da max - Max shoulder diameter OR	65,5 mm
ra max - Max shaft & housing fillet radius	1 mm



NTN Europe

1 rue des Usines · BP 2017 · 74010 Annecy Cedex · France · Tel. +33 (0)4 50 65 30 00
S.A. au capital de 322 639 919 € · RCS ANNECY B 325 821 072 · Id. Fiscale : FR 48 325 821 072
SIRET 325 821 072 00015 · Code APE 2815 Z · Code NACE 28.15

INDUSTRY CALCUL FACTORS

Equivalent dynamic radial load

$P = X.F_r + Y.F_a$

$\frac{f_0 F_a}{C_0}$	e	Fa / Fr ≤ e		Fa / Fr > e	
		X	Y	X	Y
0.172	0.19	1	0	0.56	2.3
0.345	0.22				1.99
0.689	0.26				1.71
1.03	0.28				1.55
1.38	0.3				1.45
2.07	0.34				1.31
3.45	0.38				1.15
5.17	0.42				1.04
6.89	0.44				1

Equivalent static radial load

$P_0 = X_0.F_r + Y_0.F_a$

X_0	Y_0
0.6	0.5

For single or DT bearing arrangement :

If $P_0 < F_r$, then use $P_0 = F_r$

