

Declaration of conformity



**EC/EEA DECLARATION OF CONFORMITY & INCORPORATION**  
No 14

The undersigned, representing the following manufacturer

name	SOLARTRON MOBREY LTD		
address	158 EDINBURGH AVENUE SLOUGH BERKSHIRE UK SL1 4UE		
tel No	(0)1753 756600	fax No	(0)1753 823589

herewith declares that the product

type of equipment	ULTRASONIC LIQUID LEVEL SWITCH
type Nos.	003** & 71307/**

Minor variations in the design to suit the application and mounting requirements are identified by alpha/numeric characters in the type number where indicated \* above

is in conformity with the provisions of the following EC directive(s)

reference No	title
89/336/EEC	ELECTROMAGNETIC COMPATIBILITY
92/31/EEC	AMENDING 89/336/EEC
98/37/EC	MACHINERY DIRECTIVE

and that the following standards have been applied

number	issue	subject	parts
EN 50081	1992	EMC GENERAL EMISSION REQUIREMENTS RESIDENTIAL, COMMERCIAL & LIGHT INDUSTRY	1
EN 50082	1992	EMC GENERAL EMISSION REQUIREMENTS RESIDENTIAL, COMMERCIAL & LIGHT INDUSTRY	1

the last two digits of the year in which the CE marking was first affixed is 97

**WHEN THIS PRODUCT IS INSTALLED INTO MACHINERY IT MUST NOT BE PUT INTO SERVICE UNTIL THE MACHINERY INTO WHICH IT IS TO BE INCORPORATED HAS BEEN DECLARED IN CONFORMITY WITH THE PROVISIONS OF THE MACHINERY DIRECTIVE.**

Slough UK

Date 23<sup>rd</sup> March 2000

Signed

Dr G. J. Primavesi Technical Director

P:\EC EEA Declaration.SERIES003.Doc

FORM: L1939 Rev 3 OCTOBER 1999

**Solartron Mobrey Limited**

158 Edinburgh Avenue Slough Berks UK SL1 4UE  
Tel: 01753 756600 Fax: 01753 823589  
e-mail: sales@solartron.com www.solartron.com



a Roxboro Group Company

Solartron Mobrey GmbH	Deutschland	tel: 0211/99 808-0
Solartron Mobrey Ltd	China	tel: 021 6353 5652
Mobrey sp z o o	Polska	tel: 022 871 7865
Solartron Mobrey AB	Sverige	tel: 08-725 01 00
Mobrey SA	France	tel: 01.34.30.28.30
Solartron Mobrey SA-NV	Belgium	tel: 02/465 3879
Solartron Mobrey	USA	tel: (281) 398 7890



The right is reserved to amend details given in this publication without notice

IP246  
Jan 2001

process measurement solutions



# Mobrey Ultrasonic liquid level switch

## 003S Integral sensor series

Instruction leaflet  
IP246

### Operation

The moulded body contains two piezo-electric crystals, one each side of a gap at the tip of the sensor.

An ultrasonic signal is transmitted from one crystal into the gap, but if there is air or gas in the sensor gap then the signal is not received by the other crystal. However, if there is a liquid present, the signal will be transmitted and the integral electronics will switch the output circuitry to signal the presence of a liquid.



### Description

Manufactured in Polyphenylene Sulphide (PPS) for corrosion resistance in most liquids, the 003 range of sensors can be mounted in any position in a tank using either a 1" or 3/4" thread available in BSPP, BSPT and NPT thread forms.

A thread is provided on each side of a hexagonal boss to allow either external or internal / pole mounting of the sensor.

Comprising a one piece moulded body with an integral pcb, the 003 switch is factory sealed and supplied with a 3m flying lead for customer connection. The Mobrey 003 switch is designed for high or low level alarm duties to give a voltage free changeover contact or dual solid state transistor output for alarm signalling or as part of a pump control system.



## Installation

The 003 sensor may be mounted at any angle in the vessel, although care should be taken to ensure that the liquid is free to drain out of the sensor gap. Position the sensor away from entry or exit points to avoid areas of excessive turbulence or aeration, and avoid installation in the direct flow of liquid. Baffle plates may be used if necessary. Ensure a clearance of at least 25mm from all sensor surfaces to vessel wall to avoid forming air pockets or sludge traps.


The sensor has a dual thread mounting to allow either internal or external mounting. A thread may be tapped in the vessel wall or, if the vessel has thin walls or is pressurised, a threaded boss brazed, welded or otherwise attached to the vessel wall will be required. Note the position of the markings on the hexagon flats of the sensor which show the orientation of the sensor gap, then install in the vessel as follows :-

## Wiring

The sensor is factory fitted with a flying lead. Extensions may be made using a suitably weatherproof junction box and a choice of

Parallel threaded models : ensure that the flat nitrile sealing gasket is in place over the chosen thread to effect a seal between the hexagon surface and the vessel. Screw the sensor into the vessel, taking care not to twist the sensor cable, until the joint is finger tight. Using the hexagon, carefully complete the seal by tightening the sensor a further 1/6 of a turn only, such that the sensor gap is as near vertical as possible. Taper threaded models : use PTFE or equivalent pipe seal tape wound around the sensor threads to effect the seal. Screw the sensor into the vessel, taking care not to twist the sensor cable, until the joint is finger tight. Using the hexagon, carefully complete the seal by tightening the sensor, aligning the sensor gap as near vertical as possible. Track the cable to the connection point or a junction box, securing at regular intervals. Take care not to bend the cable tighter than a 50mm radius.

cable that does not introduce excessive voltage drop. Connections are as follows :-

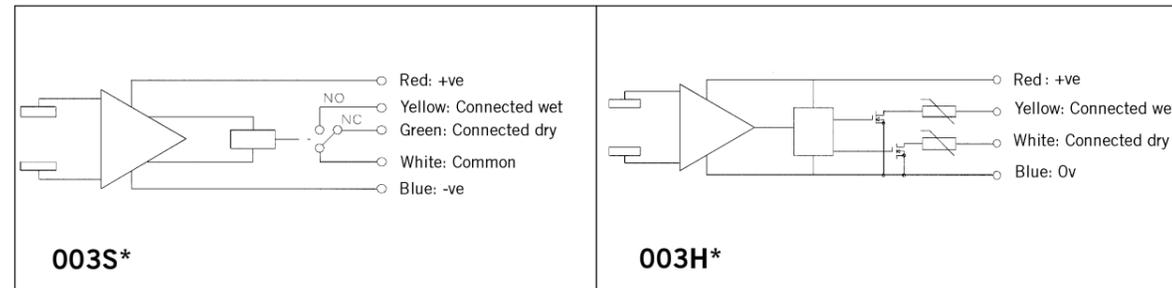

## Electrical characteristics

	003S* models	003H* models
<b>Switching function</b>	SPCO relay (energised wet)	2 x FET open drain (short circuit protected.)
<b>Max. switched current</b>	1A at 30v res. 0.25A at 30v ind.	100mA max.
<b>Max. switched voltage</b>	30v	30v
<b>Power supply</b>	18-30v dc or ac	18-30v dc or ac
<b>Dry current drawn</b>	10mA nom.	8mA nom. (4mA min.)
<b>Wet current drawn</b>	25mA max.	16mA nom. (20mA max.)
<b>Cable length</b>	3m : 5 core 7/0.2mm	3m : 4 core 7/0.2mm
<b>Cable sheathing</b>	PVC	PVC
<b>IP rating of sensor</b>	IP66/IP68 (3m)	IP66/IP68 (3m)

Not suitable for use in intrinsically safe circuits.  
Not suitable for the direct starting of large motors.

## Mechanical / operating characteristics

	003S* models	003H* models
<b>Sensor material</b>	PPS	PPS
<b>Operating pressure</b>	20 bar	20 bar
<b>Operating Temp.</b>	-20°C to +70°C	-40°C to + 105°C
<b>Ambient temperature</b>	As operating temp.	As operating temp.
<b>Minimum S. G.</b>	0.50	0.50
<b>Max. viscosity</b>	5000cSt. at 20°C	5000cSt. at 20°C
<b>Switching response</b>	50ms dry-wet 0.5s wet-dry	50ms dry-wet 0.5s wet-dry
<b>Hysteresis</b>	< 4mm	< 4mm
<b>Repeatability</b>	+/- 2mm	+/- 2mm
<b>Overall length</b>	110mm	110mm
<b>Length into tank :</b>		
<b>external mount</b>	79mm	79mm
<b>Body diameter</b>	22mm	22mm
<b>Thread size 003*0</b>	3/4" BSPT	3/4" BSPT
<b>003*1</b>	3/4" BSPP	3/4" BSPP
<b>003*2</b>	1" BSPT	1" BSPT
<b>003*5</b>	1" NPT	1" NPT


## Maintenance

The sensor is factory sealed, contains no moving parts and requires no maintenance in most applications. The sensor may need to be

cleaned periodically when used with liquids which could cause a build-up on the sensor surfaces. Note : the sensor is not suitable for steam cleaning.

## Spare parts

There are no spare parts for this factory sealed switch. A complete new switch should be fitted.

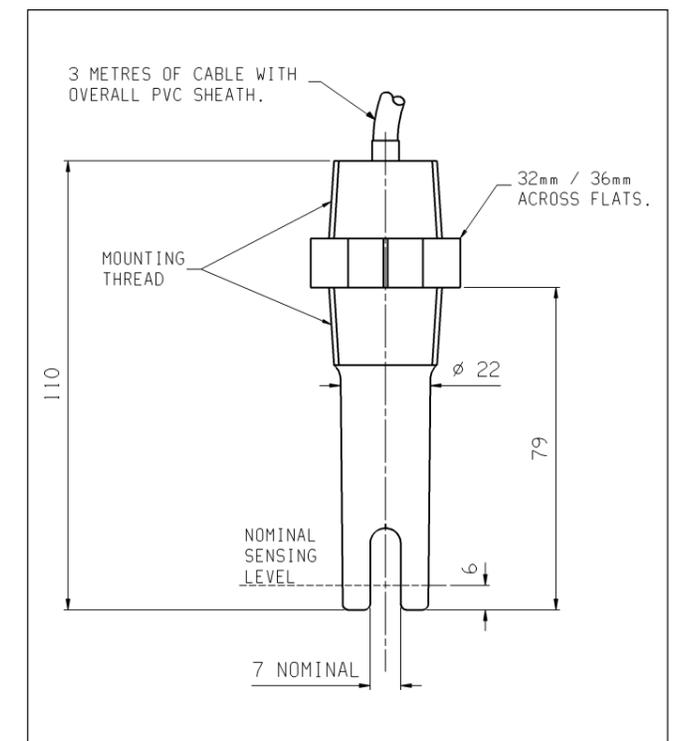

Meets the requirements of the EMC European Directive 89/336/EEC  
Light Industrial EN50081-1 & EN 50082-1 /  
Industrial EN50081-2 & EN50082-2