



IVO IRION & VOSSELER
 ZÄHLERFABRIK GMBH & CO.
 P.O. BOX 3360
 D-7730 VS-SCHWENNINGEN
 GERMANY
 TELEPHONE: (077 20) 699-1
 TELEX: 794 560 ivo d

Product Information

**Electromechanical Counters
 without reset**
F 103, F 123, F 163, F 173
 - for DC or AC -

F 103
 4.85

Description


This counter is designed to operate from DC or AC without the use of a rectifier. It also incorporates an anti-shock device to prevent miscounting.

Applications:

Include all forms of gaming machines, copying machines etc.

Ordering information

1. Type No. (e. g. F 103.003)
 2. DC or AC and voltage
 3. Frequency for AC
- Accessories
 - Specials

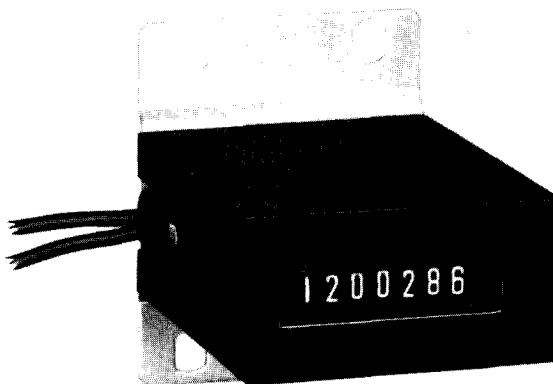

Base-plate mounting F 163

Versions

Fixing	Front dimensions Width x Height	Figures	Shockproofing	Type No.
Rear screw mounting	50 x 25 mm	7	without	F 103.001
		7	with	F 103.003
		6	without	F 103.005
		6	with	F 103.007
Front panel for spring clip	53,2 x 28,2 mm	7	without	F 123.001
		7	with	F 123.003
		6	without	F 123.005
		6	with	F 123.007
Base-plate mounting	50 x 25 mm	7	without	F 163.001
		7	with	F 163.003
		6	without	F 163.005
		6	with	F 163.007
Front panel for screw fixing	60 x 50 mm	7	without	F 173.001
		7	with	F 173.003
		6	without	F 173.005
		6	with	F 173.007

Technical data

Operation	Electromagnetic impulse drive	Protection mode	IP 51 DIN 40050
Method of counting	One pulse adds one unit in two half-steps	Test voltage	According to VDE 0660 § 65
Counting range	6 digits, 999 999 7 digits, 9 999 999	Ambient temperature	- 5° C . . + 50° C
Counter reading on delivery	500 before 0	Life expectancy	Appr. 50 million operations
Figures	4 mm high, white on black	Case	Metal base plate with a matt black plastic cover.
Electrical connection	By flying leads 300 mm long. For voltages above 42 V the counter case has to be earthed by means of the screw provided.	Weight	Approx. 150 g
		Accessories	Mounting rail for F 103. Standard length 300 mm. Part No. 080.00.082

