




Brand of NTN corporation

Technical data

6011HVZZ


Single row deep groove ball bearings



TOPLINE deep groove ball bearing, radial contact, pressed polyamide cage, shields on both sides, for high speed applications

TOPLINE

VISUAL (S)

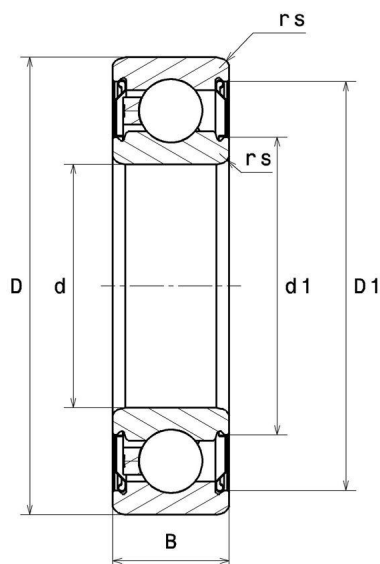


NTN Europe

1 rue des Usines · BP 2017 · 74010 Annecy Cedex · France · Tel. +33 (0)4 50 65 30 00
S.A. au capital de 322 639 919 € · RCS ANNECY B 325 821 072 · Id. Fiscale : FR 48 325 821 072
SIRET 325 821 072 00015 · Code APE 2815 Z · Code NACE 28.15

6011HVZZ

Single row deep groove ball bearings

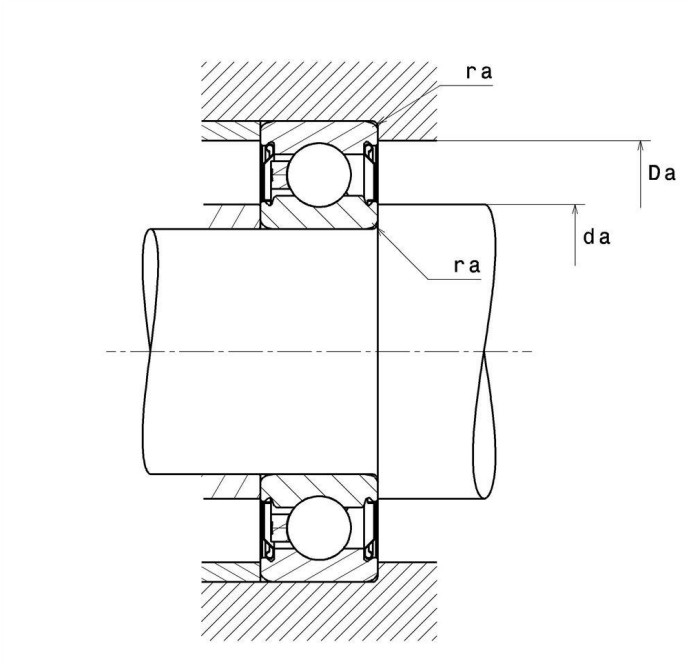

PRODUCT DEFINITION	
Brand	SNR
d - Internal diameter	55 mm
D - External diameter	90 mm
B - Bearing/Inner ring width	18 mm
d1 - External diameter inner ring	65,7 mm
D1 - Inner diameter outer ring	81,5 mm
rs - Min fillet radius	1,1 mm
Radial clearance class	C3
Mass	0,387 kg

PRODUCT PERFORMANCE	
C - Dynamic load	29800000 mN
C0 - Static load	21300000 mN
Cu - Fatigue limit load	970000 mN

6011HVZZ

Single row deep groove ball bearings

PRODUCT PERFORMANCE

f0 - Coefficient	15.4
N lim - Mechanical Limit Speed	72000 °/s
Tmin - Min operating temperature	223,15 °K
Tmax - Max operating temperature	393,15 °K

BEARING FREQUENCIES

BPFO - Over rolling frequency on outer ring (60 rpm)	5.575 Hz
BPFI - Over rolling frequency on inner (60 rpm)	7.425 Hz
BSF - Over rolling frequency on rolling element (60 rpm)	6.884 Hz
BRF - Rotational frequency - rolling element (60 rpm)	3.442 Hz
FTF - Rotational frequency - cage (60 rpm)	0.429 Hz

ABUTMENT

da min - Min shoulder diameter IR	61,5 mm
da max - Max shoulder diameter IR	65,7 mm
Da max - Max shoulder diameter OR	83,5 mm
ra max - Max shaft & housing fillet radius	1 mm



NTN Europe

1 rue des Usines · BP 2017 · 74010 Annecy Cedex · France · Tel. +33 (0)4 50 65 30 00
S.A. au capital de 322 639 919 € · RCS ANNECY B 325 821 072 · Id. Fiscale : FR 48 325 821 072
SIRET 325 821 072 00015 · Code APE 2815 Z · Code NACE 28.15

INDUSTRY CALCUL FACTORS

Equivalent dynamic radial load

$P = X.F_r + Y.F_a$

$\frac{f_0 F_a}{C_0}$	e	Fa / Fr ≤ e		Fa / Fr > e	
		X	Y	X	Y
0.172	0.19	1	0	0.56	2.3
0.345	0.22				1.99
0.689	0.26				1.71
1.03	0.28				1.55
1.38	0.3				1.45
2.07	0.34				1.31
3.45	0.38				1.15
5.17	0.42				1.04
6.89	0.44				1

Equivalent static radial load

$P_0 = X_0.F_r + Y_0.F_a$

X_0	Y_0
0.6	0.5

For single or DT bearing arrangement :

If $P_0 < F_r$, then use $P_0 = F_r$

