

Datasheet

RS Pro Converter Cable USB to RS232



Features:

Quick solution for the use of peripheral devices with serial interfaces (e.g. modems, digital cameras, printers) with notebooks or computers with USB interface

- Data transfer rate of over 1Mbit/s
- Connections: 1x USB Type A, 1x DB 9pin connector
- Equivalent to the USB 1.1 specification
- Length: 1.8 m
- Contents: Converter cable, adapter DB9 FDB25 M, driver CD



ENGLISH

Specifications:

Connector A: USB
Connector A Gender: Male
Connector A Type: USB
Connector B: D-sub, 9-pin (Serial)
Connector B Gender: Male
Connector B Type: D-sub, 9-pin (Serial)

Contents: Converter cable, Adapter DB9F / DB25M, CD with driver and instruction manual


Cable length: 1.8 m
Side A connection (PC): USB A Male
Side B connection (Peripherals): DB9 / DB25 Male
Area of application: External
Left Connector Gender: Male
Right Connector Gender: Male
Max. bandwidth: 1 MBit/s
Left Connector Type: USB 2.0 Type A
Right Connector Type: D-Sub 9pin (DB9)
Conversion direction: serial USB

Operating System compatibility: Windows 2000, XP, Vista, 7, 8, 8.1, 10
Mac OS 9.x, 8.x, 10.6 to 10.12
Linux 2.4.31 to 4.4.x LTS Versions Only

Pin Assignment

ENGLISH

DB9F	DB25M
1	8
2	3
3	2
4	20
5	7
6	6
7	4
8	5
9	22
SHELL	SHELL

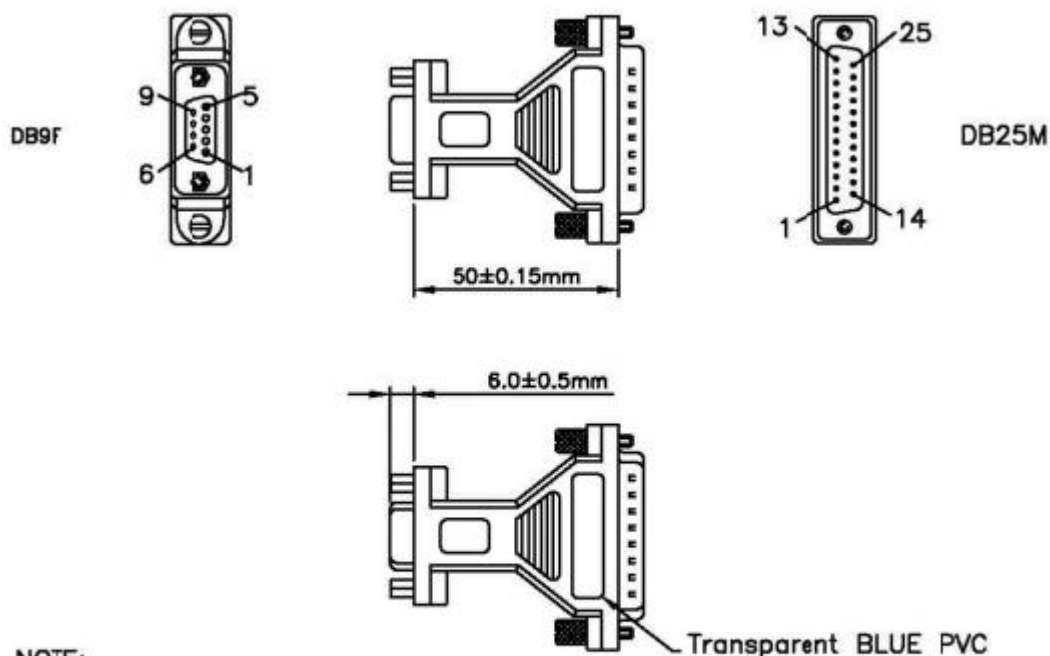

NOTE:

1.CONTINUITY TESTING:

INSULATION RESISTANCE:10MΩ (MIN)

CONDUCTIVE RESISTANCE:1.0Ω (MAX)

2.TOOLING FOR DB9F+DB25M:SM2-A925-Z01.

TOOLING FOR METAL SCREW:SMT-5622-K01

3.ALL MATERIALS ARE RoHS COMPLIANT.