



Product designation
Product type designation
Motor type

Soft Starter
ADXT
Asynchronous
three phase

Electrical features

| | | | |
|----------------------------------|-------------------------------|-----|---|
| Supplies voltage | Type of system | | Three phase |
| | Rated supply voltage | V | 380...690VAC |
| | auxiliary supply voltage (Us) | | 24VAC/DC |
| | Rated frequency | Hz | 50/60 |
| Rated starter current Ie | | A | 230 |
| Rated motor power in-line | | | |
| | IEC ratings (T≤40°C) | | |
| | 400VAC | kW | 132 |
| | 500VAC | KW | 160 |
| | 690VAC | KW | 200 |
| | UL ratings (T≤40°C) | | |
| | 380-415VAC | HP | 125 |
| | 440-480VAC | HP | 150 |
| | 550-600VAC | HP | 200 |
| Rated motor power inside delta | | | |
| | IEC ratings (T≤40°C) | | |
| | 400VAC | kW | 160 |
| | 500VAC | KW | 250 |
| | 690VAC | KW | 315 |
| | UL ratings (T≤40°C) | | |
| | 380-415VAC | HP | 200 |
| | 440-480VAC | HP | 250 |
| | 550-600VAC | HP | 350 |
| Number of controlled phases | | Nr. | 3 |
| Built-in bypass | | | Yes |
| Cooling System | | | Forced |
| Rated insulation voltage Ui | | V | 690 |
| Programming interface | | | |
| Display | | | LCD graphic display |
| Programming with NFC technology | | | No |
| Optical port | | | No |
| Startup and stop settings | | | |
| Startup method | | | Constant current, current ramp, voltage ramp, adaptive control |


| | |
|--|---|
| Stop method | Voltage ramp, adaptive control, free-wheel stop, DC braking, soft stop with braking contactor |
| Protections | |
| Auxiliary supply protection | Voltage too low |
| Power supply Protection | No power, phase loss, phase sequence, frequency out of limits, voltage out of limits |
| Motor protection | Overload, locked rotor, current asymmetry, current too low, power too low, overtemperature, starting too long |
| Starter protection | Overcurrent, overtemperature, phase shorted |
| Functions | |
| Built-in bypass | Yes |
| Built-in display and keypad | Yes |
| Languages | 6 |
| View measurements | Yes |
| Torque control | No |
| Adjustable current limit | Yes |
| Dynamic braking | Yes |
| Kick Start function | Yes |
| Motor overload electronic protection | Yes |
| Motor protection PTC input | Thermistor input |
| Protection against phase loss | Yes |
| Protection against phase inversion | Yes |
| Protection against locked rotor | Yes |
| Protection against thyristor overtemperature | Yes |
| Protection against low load | Yes |
| Programmable alarm | Yes |
| Digital inputs | 4 |
| Analog inputs | 0 |
| Digital outputs | 3 |
| Analog output | 1 |
| Optical port for programming | No |
| Event log | Yes |
| Motor hour counter | Yes |
| Startup counter | Yes |
| Clock calendar | Yes |
| Remote external keypad | Yes |

Input and Output

Digital inputs

Number of digital input Nr. 4

| | | | |
|---------------------------|----------------------------|--------|---|
| | Digital input type | | 4 input with dry contact + 1 thermistor input |
| | Digital input functions | | 1x Start/Stop, 1x Reset and 2 Programmable |
| Digital outputs | | | |
| | Number of digital output | Nr. | 3 |
| | Digital output arrangement | | 2x 1NO + 1x C/O 1NO Line contactor + 1NO Programmable + 1C/O Programmable |
| | Digital output functions | | |
| Ambient conditions | | | |
| Temperature | | | |
| | Operating temperature | min °C | -10 |
| | | max °C | +60°C (with current derating >40°C) |
| | Storage temperature | min °C | -25 |
| | | max °C | +60 |
| | Max altitude | m | 1000 without derating |
| | Relative humidity | % | <95% |
| | Pollution degree | | 3 |
| Housing | | | |
| | Mounting | | Screw-fixing |
| | IP degree of protection | | IP00 |
| | Dimensions (W x H x D) | mm | 216x495x244 |
| | Weight | Kg | 12.7 |
| Dimensions | | | |

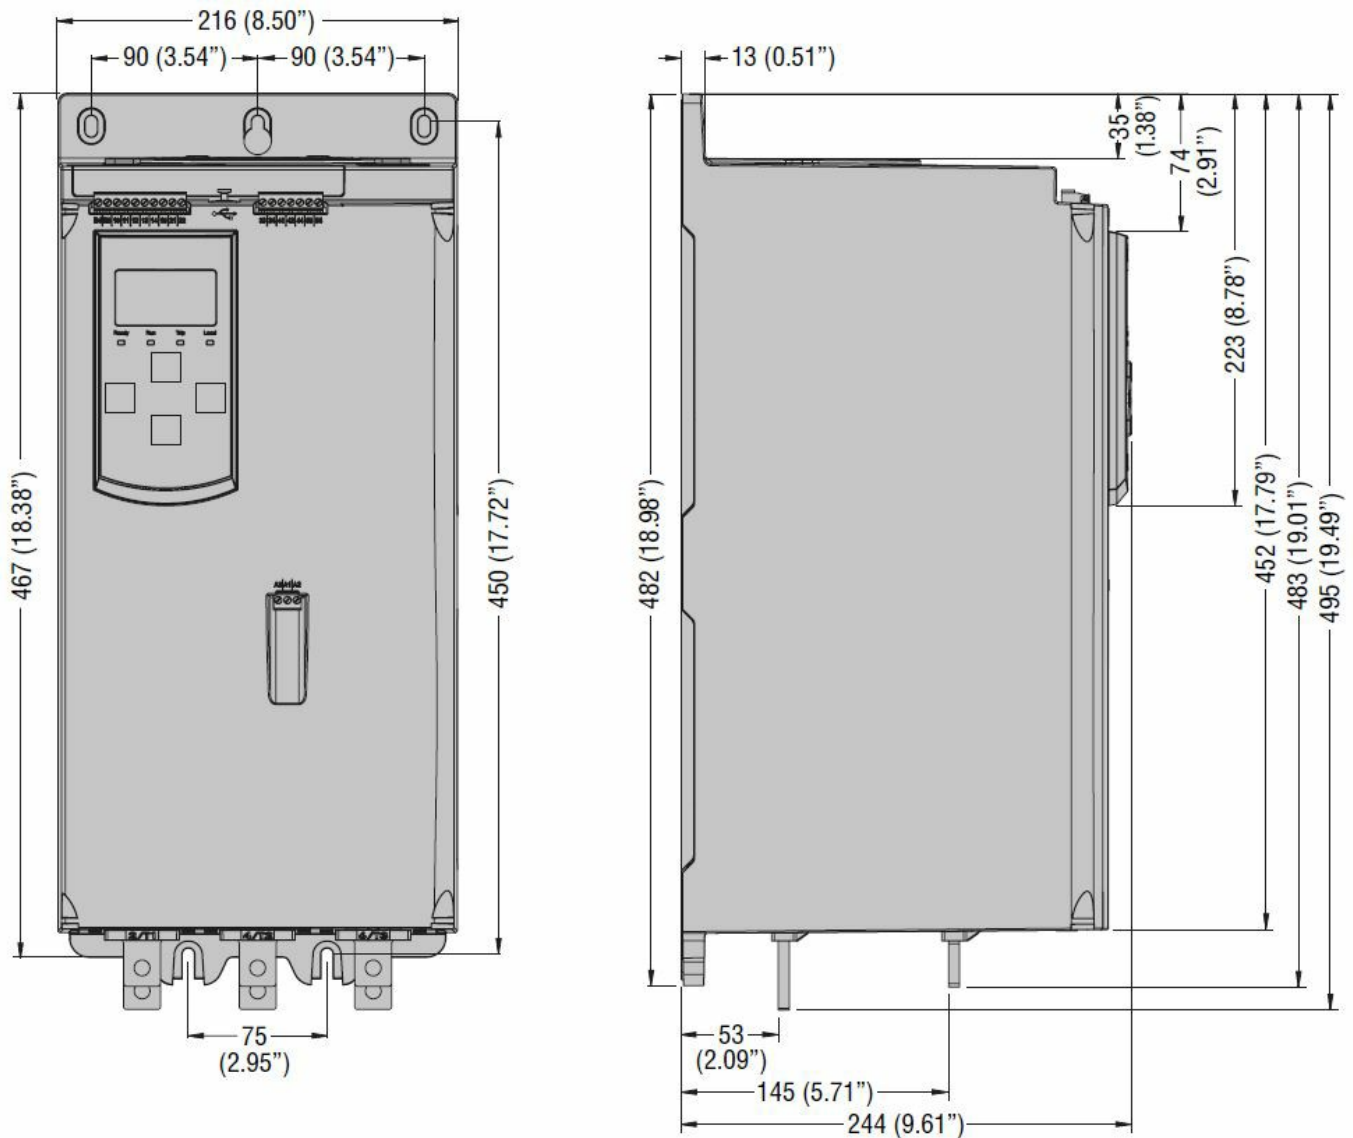

Certifications and compliance

Compliance

CSA C22.2 n°60947-4-2

IEC/EN/BS 60947-4-2

UL 60947-4-2

Certificates

cULus

RCM

ETIM classification

ETIM 8.0

EC000640 - Soft starter