1.0 SCOPE

This specification covers the requirements for the application of Ultra-Fit **Tangless** 3.50 mm pitch wire to board, wire to wire connector systems.

2.0 PRODUCT NAME AND SERIES NUMBERS

Ultra-Fit Tangless Female Crimp Terminal 172253

Ultra-Fit Tangless Receptacle Housing 172256 / 172258

TPA Tangless 172264

Ultra-Fit Vertical Header 172286 / 172287 / 172298 / 172299

Ultra-Fit Right Angle Header 172310 / 172316

Ultra-Fit Male Crimp Terminal 216946

Ultra-Fit Plug Housing 202569/216945

3.0 REFERENCE DOCUMENTS

See the appropriate sales drawings for information on specific part numbers and materials.

For dimensions refer

1722560003(SD)	Ultra-Fit, Tangless, Single Row, Receptacle
1722580003(SD)	Ultra-Fit, Tangless, Dual Row, Receptacle
1722532000(SD)	Ultra-Fit, Tangless, Female Crimp Terminal
1722640002(SD)	Ultra-Fit, Tangless, TPA
SD-172286-1000	Ultra-Fit, Vertical, Single Row, Kinked Pin, Vert Header
SD-172287-1000	Ultra-Fit, Vertical, Single Row, Solder Clip, Vert Header
SD-172298-1000	Ultra-Fit, Vertical, Dual Row, Kinked Pin, Vert Header
SD-172299-1000	Ultra-Fit, Vertical, Dual Row, Solder Clip, Vert Header
SD-172310-1000	Ultra-Fit, Right Angle, Single Row, Vert Header
SD-172316-1000	Ultra-Fit, Right Angle, Dual Row, Vert Header
2169461000-SD	Ultra-Fit, Plug, Male Crimp Terminal
2025691000-SD	Ultra-Fit, Single Row, Plug
2169451000-SD	Ultra-Fit, Dual Row, Plug

REVISION: ECR/ECN INFORMATION:
EC No: 730164

DATE: 1/04/2023

APPLICATION SPECIFICATION FOR ULTRA-FIT WIRE TO BOARD AND WIRE TO WRIE CONNECTOR SYSTEM

SHEET No.

1 of **10**

DOCUMENT NUMBER:

В

1723230003

CREATED / REVISED BY:
Leo. Wu

TITLE:

CHECKED BY: Nicolas. Zhang

APPROVED BY:
Anson. Yin

4.0 GENERAL APPLICATION NOTES

Appearance:

 Parts conform to class "B" requirements of cosmetic specification PS-45499-002 except where noted on the sales drawings.

Connector Application

- This connector system is designed to mate gold plating to gold plating OR tin plating to tin plating. Never cross mate tin plated parts to gold plated parts.
- This connector system is not designed for current sharing (i.e. splitting one current load across multiple circuits)
- Connectors are not to be mated or unmated while circuits are live except per the current interrupt rating listed in product specification: PS-172323-0001

Packaging

• The parts should remain in the original Molex packaging until ready for use to prevent damage.

Chemical Exposure

 Do not store terminals or header assemblies near any chemicals listed below as they may cause corrosion in the terminal contacts.

Alkalies Ammonia Citrates Phosphates Citrates Sulfur Compounds Amines Carbonates Nitrites Sulfur Nitrites Tartrates

					-
REVISION:	ECR/ECN INFORMATION:	TITLE:	APPLICATION	ON SPECIFICATION	ON FOR
В	EC No: 730164			WIRE TO BOAR	
D	DATE: 1/04/2023	١	WIRE TO WR	RIE CONNECTOR	SYSTEM
DOCUMENT	NI IMBER:	CREATE	D / REVISED BY:	CHECKED BY	APPRO\/

SHEET No.

2 of **10**

 DOCUMENT NUMBER:
 CREATED / REVISED BY:
 CHECKED BY:
 APPROVED BY:


 1723230003
 Leo. Wu
 Nicolas. Zhang
 Anson. Yin

Crimped Terminal Extraction

 Terminal extraction tool: See Molex part# 011-03-0016 instructions online on website. Do not reuse terminals that have been removed with the extraction tool. The receptacle/plug housing can be reused if it was not damaged.

Minimum wire bend, cable tie or twist location

Circuit Sizes	Dim T Min.
2-6	.50" (12.7 mm)
8	.75" (19.1 mm)
10-12 1.00" (25.4 mm)	
14-16	1.25" (31.75 mm)

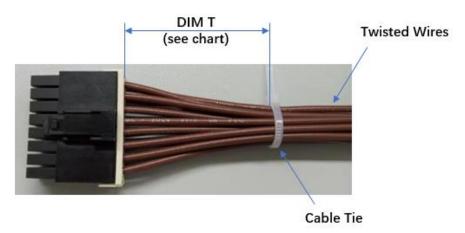

- The "T" dimension defines a "free" length of wire, or a length of wire that is not subject to significant bias by external factors such as a wire tie, wire twisting, or other means of bending or deforming of the wires that repositions them from their natural relaxed state or location where they enter the housing. This dimension is a general recommendation and may need to be adjusted for different wire gauges and wire type and insulation thickness and insulation material.
- Wires are to be dressed in such a manner to allow the terminals to float freely in the receptacle pocket.

Connector Testing


DEVICIONE FOR/ECN INFORMATION. TITLE.

 Do not use Ultra-Fit connectors as test parts, they are not intended to be used with repeated mating. Follow durability cycles as listed in PS-172323-0001


B REVISION:	EC No: 730164 DATE: 1/04/2023	ULTRA-FI	ON SPECIFICATION WIRE TO BOARING RIE CONNECTOR	D AND	3 of 10
DOCUMENT NUMBER:		CREATED / REVISED BY:	CHECKED BY:	APPRO\	/ED BY:
1723230003		Leo. Wu	Nicolas. Zhang	Ansor	n. Yin
TEMPLATE FILENAME: APPLICATION SPECISIZE AVV.1).DOC					

Crimped Terminal Insertion

- Terminals are inserted in same direction as below picture for both single row and dual row.
- DO NOT reuse receptacle/plug housing if a crimped terminal was pushed out without an extraction tool.

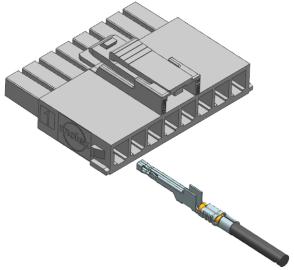

Single Row Receptacle - Terminal position into the housing

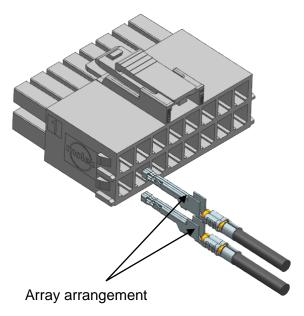


Dual Row Receptacle - Terminal position into the housing

REVISION: ECR/ECN INFORMATION: TITLE:


В	EC No: 730164 DATE: 1/04/2023	ULTRA-FIT WIRE TO BOARD AND WIRE TO WRIE CONNECTOR SYSTEM 4 of 10					
DOCUMEN [*]	T NUMBER: <u>CREATED / REVISED BY:</u> <u>CHECKED BY:</u> <u>APP</u>		<u>APPROV</u>	ED BY:			
1723230003		Leo. Wu	Nicolas. Zhang	Anson. Yin			
	TEMPLATE ELLENAME: ADDLICATION SPECISIZE AVAIA DOC						

APPLICATION SPECIFICATION FOR

SHEET No.








Panel Mount


Panel Mount

Single Row Plug – Terminal position into the housing

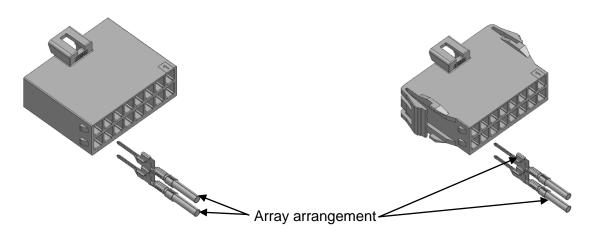

Dual Row Plug - Terminal position into the housing


Free Hanging

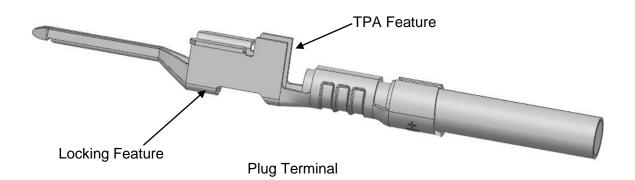

REVISION:	ECR/ECN INFORMATION:	''''LE: APPLICATI	ON SPECIFICATION	ON FOR
R	EC No: 730164	ULTRA-FI	T WIRE TO BOAR	D AND
D	DATE: 1/04/2023	WIRE TO WE	RIE CONNECTOR	SYSTEM
DOCUMENT	ΓNUMBER:	CREATED / REVISED BY:	CHECKED BY:	APPRO

5 of **10**


SHEET No.

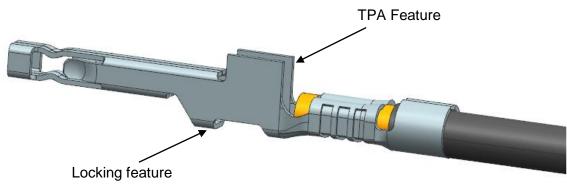

Receptacle Terminal

• Ensure terminals are fully seated and locked during terminal insertion to the housing

TPA Assembly over the wires

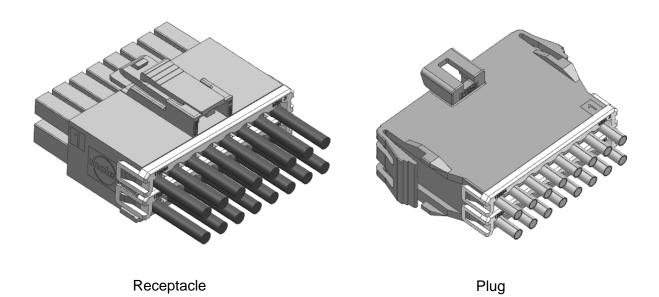


REVISION:	ECR/ECN INFORMATION:	TITLE: APPLICATION	LE: APPLICATION SPECIFICATION FOR			
В	EC No: 730164	ULTRA-FI	WIRE TO BOAR	D AND	6 of 10	
D	DATE: 1/04/2023	WIRE TO WE	RIE CONNECTOR	SYSTEM	0 01 10	
DOCUMEN [*]	T NUMBER:	CREATED / REVISED BY:	CHECKED BY:	APPRO\	/ED BY:	
1723230003		Leo. Wu	Nicolas. Zhang	Ansor	n. Yin	

TEMPLATE FILENAME: APPLICATION_SPEC[SIZE_A](V.1).DOC

Crimp Terminal Appearance

• Forming marks on female terminal are normal. These are due to stretching of the plating during the forming process and are superficial cracks on the plating surface.

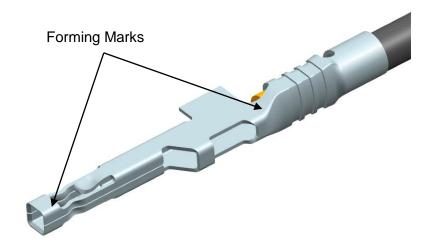

Crimp Terminal Function

REVISION: FCR/FCN INFORMATION: TITLE:

DO not use terminals with damaged front face:



Normal Square Front Box



Damaged Front Box

В	EC No: 730164 DATE: 1/04/2023	ULTRA-FI	ULTRA-FIT WIRE TO BOARD AND WIRE TO WRIE CONNECTOR SYSTEM			
DOCUMEN	T NUMBER:	CREATED / REVISED BY: CHECKED BY: APPR		APPRO\	/ED BY:	
1723230003 Leo. Wu Nicolas. Zhang		Ansor	n. Yin			
TEMPLATE FILENAME: APPLICATION_SPEC[SIZE_A](V.1).DOC						

Crimp Terminal Handling

• Due to exposed terminal interface, keep crimp terminals on prepackaged reel until they are crimped onto wires. Do not precut and bulk pack terminals due to risk of damaging the contact interface. Store and handle crimped terminals so the interface does not make contact with other terminals or foreign objects. If terminal interface is damaged please discard prior to assembly.

Crimping

- For acceptable crimp tools and specifications see application tooling section on Molex.com listed for each terminal part number.
- Use with multi strand wire only. Single strand wire should not be used.
- This female crimp terminal is designed for single wire crimping only, no double wire crimping is allowed.
- Use only Molex specified crimp tooling, refer to Molex.com for acceptable crimp tooling. Crimped terminals must also meet Molex crimp specifications. Using crimp tooling/specifications other than specified voids any product warranties and will negatively impact mechanical and electrical performance.

Header Appearance

REVISION:

Discoloration in the bandolier carrier area of the pin is inherent to the plating process and is due to the masking effect of the carrier. This discoloration is in a non-functional area of the pin and will not affect the performance of the header assembly. Refer to cosmetic specification PS-45499-002.


Right Angle Header Appearance

ECR/ECN INFORMATION:

FC No. 730164

TITLE:

• Forming marks on header pins are acceptable. Refer to cosmetic specification PS-45499-002.

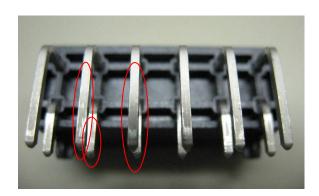


В	DATE: 1/04/2023	_	WIRE TO WRIE CONNECTOR SYSTEM 8 of 10					
DOCUMENT NUMBER:		CREATED / REVISED BY:	CHECKED BY:	<u>APPROV</u>	<u>'ED BY:</u>			
1723230003		Leo. Wu	Nicolas. Zhang	Anson. Yin				
TEMPLATE FILENAME: APPLICATION, SPECISIZE, AVV. 1) DOC								

APPLICATION SPECIFICATION FOR

SHEET No.

Header Assembly to Board

- Headers are designed with press fit pegs and need to be pushed into the circuit board.
- Header should be flush with board after insertion.
- See below for solder process information.

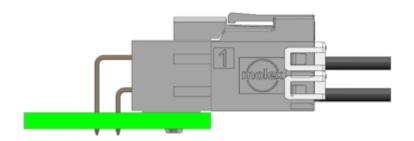

Solder Process Temperatures

Wave Solder: 260°C Max
Reflow Solder: 260°C Max

Reflow Soldering Profile

See AS-40000-5013


Plated Thru Hole profile

ECR/ECN INFORMATION:

TITLE:

REVISION:

 Keep outer ring at 5 mils max with at least 20 mils distance between adjacent metal pads

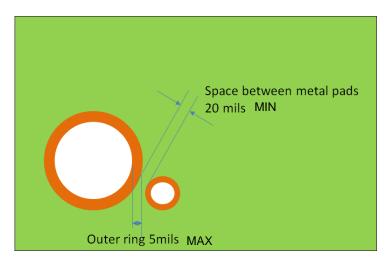


В	EC No: 730164 DATE: 1/04/2023		ULTRA-FIT WIRE TO BOARD AND WIRE TO WRIE CONNECTOR SYSTEM				
DOCUMEN [*]	T NUMBER:	CREATED / REVISED BY:	CHECKED BY:	ED BY: APPROVED BY:			
1	723230003	Leo. Wu	Leo. Wu Nicolas. Zhang Anson. Yir		n. Yin		
TEMPLATE FILENAME: APPLICATION_SPEC[SIZE_A](V.1).DOC							

APPLICATION SPECIFICATION FOR

SHEET No.

Wave Solder Direction

Preferred wave solder direction:

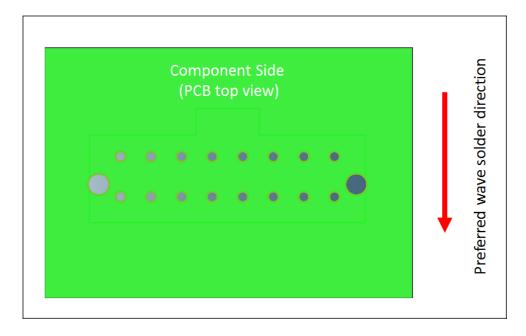

REVISION:	ECR/ECN INFORMATION:	TITLE: APPLICATION	ON SPECIFICATION	ON FOR	SHEET No.
В	EC No: 730164	ULTRA-FI	WIRE TO BOAR	D AND	10 of 10
В	DATE: 1/04/2023	WIRE TO WE	RIE CONNECTOR	SYSTEM	10 01 10
<u>DOCUMEN</u>	ΓNUMBER:	CREATED / REVISED BY:	CHECKED BY:	<u>APPROV</u>	<u>ED BY:</u>
1	723230003	Leo. Wu	Nicolas. Zhang	Ansor	n. Yin
TEMPLATE FILENAME: APPLICATION_SPEC[SIZE_A](V.1).DOC					