

HARTING IE Cat.7A 4x2xAWG26/7 PUR, 1000m

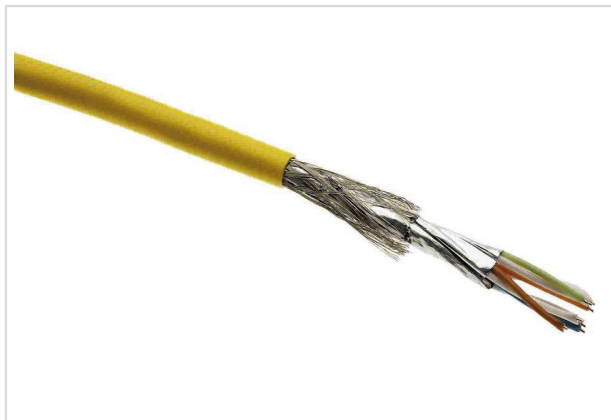


Image is for illustration purposes only. Please refer to product description.

Part number	09 45 600 0751
Specification	HARTING IE Cat.7A 4x2xAWG26/7 PUR, 1000m
HARTING eCatalogue	https://harting.com/09456000751

Identification

Category	System cabling
Element	Bulk cables
Specification	Not assembled
Type of cable	Copper cable (round)
Description of the cable	Flame retardant
	Halogen-free
	Oil resistant
Printing on cable	HARTING INDUSTRIAL CABLE S/FTP CAT 7A PUR 4x2xAWG26/7\$094560001090000\$ \$BA-Nr.\$ \$m-sign.\$
Features	Transmission characteristics up to 1200 MHz.

Version

Cable length	1,000 m
Number of cores	8
Core structure	4x 2x AWG 26/7

Technical characteristics

Rated voltage	>125 V
Transmission characteristics	Cat. 7 _A Class F _A up to 1,000 MHz
Data rate	10 Mbit/s
	100 Mbit/s
	1 Gbit/s
	2.5 Gbit/s
	5 Gbit/s
	10 Gbit/s



Pushing Performance
Since 1945

Technical characteristics

Limiting temperature	-40 ... +70 °C unmoved -10 ... +50 °C moved
Cable diameter	6.4 mm
Minimum bending radius	5x Cable diameter (repeated bending)
Tensile strength	≤60 N
Test voltage U _{r.m.s.}	1 kV
Coupling attenuation @ 20 °C / 10 MHz	5 mΩ/m
Conductor resistance @ 20 °C	≤145 Ω/km
Insulation resistance @ 20 °C	≥5,000 MΩ x km
Signal run time @ 20 °C	≤4.4 ns/m
Impedance @ 100 MHz	100 Ω ±5 %

Material properties

Material (cable)	PUR (polyurethane)
Colour (cable)	Yellow
RoHS	compliant
ELV status	compliant
China RoHS	e
REACH Annex XVII substances	Not contained
REACH ANNEX XIV substances	Not contained
REACH SVHC substances	Not contained

Specifications and approvals

Specifications	IEC 60332-2-2 Flame retardancy
	IEC 60754-1 Halogen freeness
	IEC 60754-2 Halogen freeness
	IEC 61034-1 Smoke density
	IEC 61034-2 Smoke density
	EN 60811-2-1 Oil resistance

Commercial data

Packaging size	1,000
Net weight	53 g
Net weight	46 g/m
Country of origin	Germany
European customs tariff number	85444290



Pushing Performance
Since 1945

Commercial data

GTIN	5713140273757
eCl@ss	27061801 Data and communication cable (copper)
ETIM	EC003249
UNSPSC 24.0	26121609