# **Product Environmental Profile**

#### Easy9 Metal Consumer Unit 2+5+5 Way











#### **General information**

Representative product

Easy9 Metal Consumer Unit 2+5+5 Way -EZ9ES2R5R5DMRE

**Description of the product** 

Easy9 metal consumer unit is used to control and distribute electrical energy, principally in domestic premises. The Easy9 range of consumer units are compliant to BS 7671:2008 Amendment 3. They provide reliability, flexibility and efficiency.


**Functional unit** 

Easy9 metal consumer unit is used to distribute electricity up to 100A during 20 years.

### **Constituent materials**

Reference product mass

including the product, its packaging and additional elements and accessories 7800 q

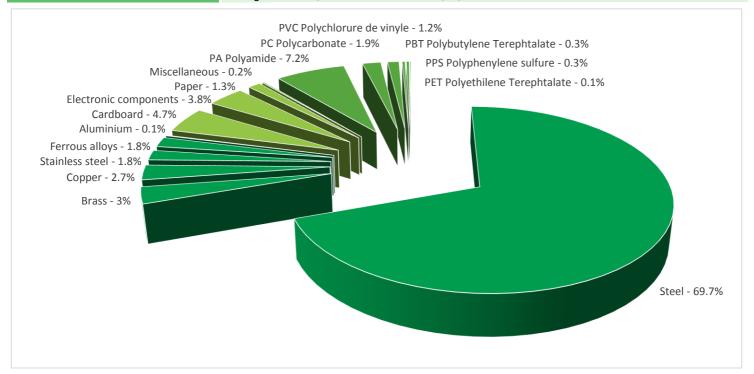

### Substance assessment

Products of this range are designed in conformity with the requirements of the RoHS directive (European Directive 2011/65/EU of 8 June 2011) and do not contain, or only contain in the authorised proportions, lead, mercury, cadmium, hexavalent chromium or flame retardants (polybrominated biphenyls - PBB, polybrominated diphenyl ethers - PBDE) as mentioned in the Directive

As the products of the range are designed in accordance with the RoHS Directive (European Directive 2002/95/EC of 27 January 2003), they can be incorporated without any restriction in an assembly or an installation subject to this Directive.


Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page

The Easy9 Metal Consumer Unit 2+5+5 Way presents the following relevent environmental aspects						
Manufacturing	Manufactured at a Schneider Electric production site ISO14001 certified					
Distribution	Weight and volume of the packaging optimized, based on the European Union's packaging directive  Packaging weight is 383.6 g, consisting of carboard (99%), paper (1%)  Product distribution optimised by setting up local distribution centres					
Installation	Ref EZ9ES2R5R5DMRE does not require any installation operations					
Use	The product does not require special maintenance operations.					
End of life	End of life optimized to decrease the amount of waste and allow recovery of the product components and materials  No special end-of-life treatment required. According to countries' practices this product can enter the usual end-of-life treatment process.					
	Based on "ECO'DEEE recyclability and recoverability calculation method"  Recyclability potential: 79% (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).					

## **Environmental impacts**

Reference life time	20 years					
Product category	Passive products - continuous operation					
Installation elements	No special components needed					
Use scenario	Product dissipation is 4.23 W full load, loading rate is 30% and service uptime percentage is 100%. The product is in active mode 100% of the time with a power use of 4.23W with load rate 30%, for 20 years.					
Geographical representativeness	United Kingdom					
Technological representativeness	Easy9 metal consumer unit is used to control and distribute electrical energy, principally in domestic premises. The Easy9 range of consumer units are compliant to BS 7671:2008 Amendment 3. They provide reliability, flexibility and efficiency.					
	Manufacturing	Installation	Use	End of life		
Energy model used	Energy model used: United Kingdom	Electricity grid mix; AC; consumption mix, at consumer; 230V; GB	Electricity grid mix; AC; consumption mix, at consumer; 230V; GB	Electricity grid mix; AC; consumption mix, at consumer; 230V; GB		

Compulsory indicators		Easy9 Metal Consumer Unit 2+5+5 Way - EZ9ES2R5R5DMRE					
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to mineral resources depletion	kg Sb eq	1.09E-02	1.09E-02	0*	0*	1.04E-05	0*
Contribution to the soil and water acidification	kg SO <sub>2</sub> eq	3.04E+00	1.15E-01	4.60E-03	0*	2.92E+00	2.18E-03
Contribution to water eutrophication	kg PO <sub>4</sub> <sup>3-</sup> eq	1.74E-01	1.87E-02	1.06E-03	2.59E-05	1.53E-01	5.36E-04
Contribution to global warming	kg CO <sub>2</sub> eq	5.36E+02	4.26E+01	1.01E+00	0*	4.91E+02	8.14E-01
Contribution to ozone layer depletion	kg CFC11 eq	8.26E-05	5.44E-06	0*	0*	7.71E-05	4.68E-08
Contribution to photochemical oxidation	kg C₂H₄ eq	1.57E-01	1.17E-02	3.28E-04	0*	1.44E-01	2.33E-04
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Net use of freshwater	m3	1.84E+00	6.25E-01	0*	0*	1.22E+00	8.94E-04
Total Primary Energy	MJ	6.72E+03	8.00E+02	1.35E+01	0*	5.89E+03	1.06E+01

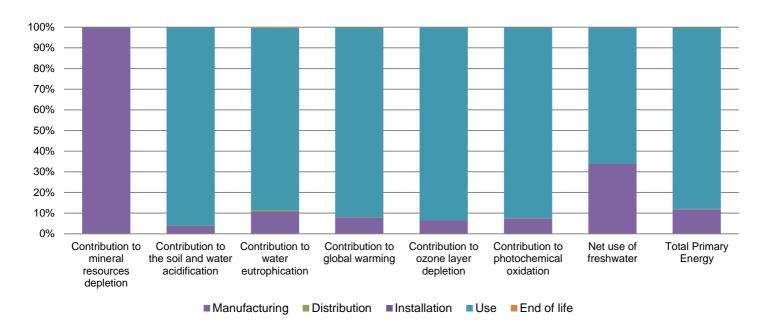

Optional indicators	Easy9 Metal Consumer Unit 2+5+5 Way - EZ9ES2R5R5DMRE						
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to fossil resources depletion	MJ	6.28E+03	5.26E+02	1.41E+01	0*	5.73E+03	9.91E+00
Contribution to air pollution	m³	2.91E+04	1.48E+04	4.28E+01	3.93E+00	1.42E+04	7.73E+01
Contribution to water pollution	m³	1.82E+04	2.32E+03	1.66E+02	4.20E+00	1.56E+04	8.51E+01
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Use of secondary material	kg	1.49E-01	1.49E-01	0*	0*	0*	0*
Total use of renewable primary energy resources	MJ	1.48E+02	1.15E+01	1.90E-02	0*	1.36E+02	0*
Total use of non-renewable primary energy resources	MJ	6.57E+03	7.89E+02	1.35E+01	0*	5.76E+03	1.06E+01
Use of renewable primary energy excluding renewable primary energy used as raw material	MJ	1.40E+02	3.55E+00	1.90E-02	0*	1.36E+02	0*
Use of renewable primary energy resources used as raw material	MJ	7.97E+00	7.97E+00	0*	0*	0*	0*
Use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	6.54E+03	7.57E+02	1.35E+01	0*	5.76E+03	1.06E+01
Use of non renewable primary energy resources used as raw material	MJ	3.17E+01	3.17E+01	0*	0*	0*	0*
Use of non renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*
Use of renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*
Waste categories	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Hazardous waste disposed	kg	6.80E+02	6.70E+02	0*	4.25E-01	0*	9.11E+00
Non hazardous waste disposed	kg	6.87E+02	3.11E+01	0*	0*	6.56E+02	0*
Radioactive waste disposed	kg	9.78E-01	1.08E-02	0*	0*	9.67E-01	0*
Other environmental information	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Materials for recycling	kg	7.13E+00	9.05E-01	0*	3.44E-01	0*	5.88E+00
Components for reuse	kg	0.00E+00	0*	0*	0*	0*	0*
Materials for energy recovery	kg	4.37E-02	5.55E-03	0*	0*	0*	3.82E-02
Exported Energy	MJ	0.00E+00	0*	0*	0*	0*	0*

<sup>\*</sup> represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version EIME v5.5, database version 2016-11.

The use phase is the life cycle phase which has the greatest impact on the majority of environmental indicators (based on compulsory indicators).

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration N° SCHN-00284-V01.01-EN Drafting rules PCR-ed3-EN-2015 04 02

Verifier accreditation N° 0 Supplemented by PSR-0005-ed2-EN-2016 03 29

Date of issue 10/2017 Information and reference documents www.pep-ecopassport.org

Validity period 5 years

Independent verification of the declaration and data, in compliance with ISO 14025: 2010

Internal X External

The PCR review was conducted by a panel of experts chaired by Philippe Osset (SOLINNEN)

The elements of the present PEP cannot be compared with elements from another program.

Document in compliance with ISO 14025 : 2010 « Environmental labels and declarations. Type III environmental declarations »



Schneider Electric Industries SAS

Country Customer Care Center http://www.schneider-electric.com/contact

35, rue Joseph Monier

CS 30323

F- 92506 Rueil Malmaison Cedex RCS Nanterre 954 503 439

Capital social 896 313 776 €

www.schneider-electric.com

Published by Schneider Electric

SCHN-00284-V01.01-EN © 2016 - Schneider Electric – All rights reserved

10/2017