



DIAZED FUSE LINK 500V F.CABLE AND LINE PROTECTION

Similar to image

Technical data:

Color coding of the fuse link		green
Current / for AC / rated value	A	6
Tripping characteristic class		others
Size of the fallback-system / acc. to DIN EN 60269-1		DII
Supply voltage		
• for AC / rated value	V	500
• for DC	V	500
Switching capacity current		
• in accordance with IEC 60947-2 / rated value	kA	50
• with DC / in accordance with IEC 60947-2 / rated value	kA	8
Ambient temperature		
• minimum	°C	-5
• maximum	°C	40

Certificates/approvals:

General Product Approval**Declaration of
Conformity****Test Certificates**

KEMA

[ROSTEST](#)

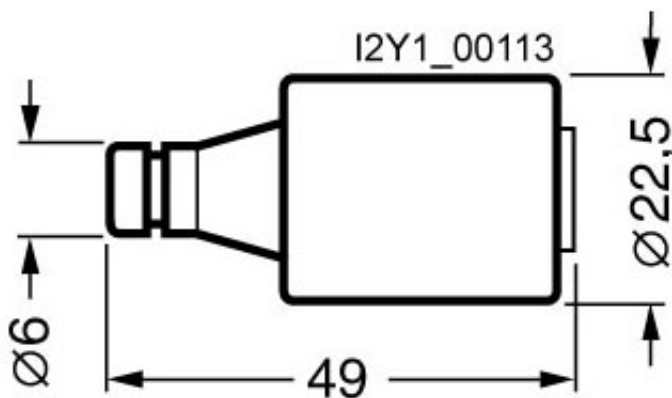
VDE



ÖVE

[Manufacturer](#)[Manufacturer](#)**Shipping Approval**

GL

Further information:**Information- and Downloadcenter (Catalogs, Brochures,...)**<http://www.siemens.com/lowvoltage/catalogs>**Industry Mall (Online ordering system)**<http://www.siemens.com/lowvoltage/mall>**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**<http://support.automation.siemens.com/WW/view/en/5SB231/all>**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SB231**CAX-Online-Generator**<http://www.siemens.com/cax>

last change:

Aug 26, 2011