




**Part Number :** [2086581201](#)  
**Product Description :** HDMI v2.1 Receptacle,  
Right-Angle, 0.37µm Gold (Au) Plating,  
1.30mm Tab, Tape and Reel, 19 Circuits  
**Series Number :** 208658  
**Status :** Active  
**Product Category :** I/O Connectors

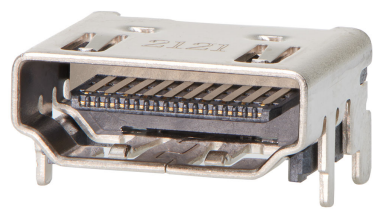

## Documents & Resources


**Drawings**  
[2086581201\\_sd.pdf](#)  
[2086581201PK-000.pdf](#)

**3D Models and Design Files**  
[2086581201\\_stp.zip](#)

**Specifications**  
[2086581201PS-000.pdf](#)  
[2086581201TS-000.pdf](#)

## Product Environment Compliance

### Compliance

GADSL/IMDS	Not Relevant
China RoHS	
EU ELV	Not Relevant
Low-Halogen Status	Low-Halogen per IEC 61249-2-21
REACH SVHC	Not Contained per D(2024)6225-DC (07 Nov 2024)
EU RoHS	Compliant per EU 2015/863

### Multiple Part Product Compliance Statements

- Eu RoHS
- REACH SVHC
- Low-Halogen

### Multiple Part Industry Compliance Documents

- IPC 1752A Class C

- IPC 1752A Class D
- Molex Product Compliance Declaration
- IEC-62474
- chemSHERPA (xml)

## EU RoHS Certificate of Compliance

---

### Part Details

#### General

Status	Active
Category	I/O Connectors
Series	208658
Description	HDMI v2.1 Receptacle, Right-Angle, 0.37µm Gold (Au) Plating, 1.30mm Tab, Tape and Reel, 19 Circuits
Application	Wire-to-Board
Component Type	Receptacle
Product Name	HDMI
Standard	HDMI 2.1
Type	A
UPC	193264765225

#### Electrical

Current - Maximum per Contact	0.5A
Shield Type	Full Shield
Shielded	Yes
Voltage - Maximum	40V DC

#### Physical

Circuits (Loaded)	19
Circuits (maximum)	19
Color - Resin	Black
Durability (mating cycles max)	10000
Gender	Female
Keying to Mating Part	None
Lock to Mating Part	Yes
Material - Metal	Copper Alloy

Material - Plating Mating	Gold
Material - Plating Termination	Gold
Material - Resin	High Temperature Thermoplastic
Mounting Style	Top-Mount
Net Weight	1.971/g
Number of Rows	2
Orientation	Right Angle
Packaging Type	Embossed Tape on Reel
Panel Mount	Without Flange
PCB Locator	Yes
PCB Retention	Yes
PCB Thickness - Recommended	1.00mm
Pitch - Mating Interface	0.50mm
Pitch - Termination Interface	0.50mm
Plating min - Mating	0.375µm
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Ports	1
Temperature Range - Operating	-40° to +85°C
Termination Interface Style	Surface Mount

---

## Mates With / Use With

### Mates with Part(s)

Description	Part Number
Mates With	HDMI Plug/Cable