

HAR PROFINET Typ B 4xAWG22/7 PUR 500m

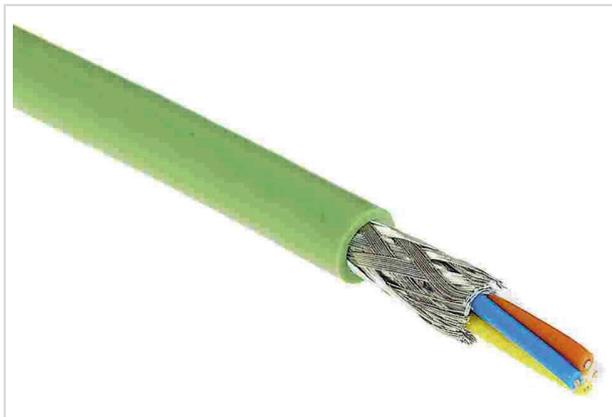


Image is for illustration purposes only. Please refer to product description.

Part number	09 45 600 0119
Specification	HAR PROFINET Typ B 4xAWG22/7 PUR 500m
HARTING eCatalogue	https://harting.com/09456000119

Identification

Category	System cabling
Element	Bulk cables
Specification	Not assembled
Type of cable	Copper cable (round)
Description of the cable	Flame retardant

Version

Cable length	500 m
Number of cores	4
Core structure	4x AWG 22/7

Technical characteristics

Transmission characteristics	Cat. 5 Class D up to 100 MHz
Data rate	10 Mbit/s 100 Mbit/s
Limiting temperature	-40 ... +70 °C unmoved -20 ... +60 °C moved
Minimum bending radius	7x Cable diameter (repeated bending) 3x Cable diameter (singular bending)
Coupling attenuation @ 20 °C / 10 MHz	20 mΩ/m
Conductor resistance @ 20 °C	≤120 Ω/km
Insulation resistance @ 20 °C	≥500 MΩ x km
Signal run time @ 20 °C	≤5.3 ns/m



Pushing Performance
Since 1945

Technical characteristics

Impedance @ 100 MHz	100 Ω \pm 5 %
---------------------	------------------------

Material properties

Material (cable)	PUR (polyurethane)
Colour (cable)	Green
RoHS	compliant
ELV status	compliant
China RoHS	e
REACH Annex XVII substances	Not contained
REACH ANNEX XIV substances	Not contained
REACH SVHC substances	Not contained
California Proposition 65 substances	Not contained

Specifications and approvals

Specifications	EN 13602
	EN 50290-2-23
	F45052-F5100
	IEC 60332-1-2 Flame retardancy
	UL style 20940 (80 °C / 600 V)
	UN/ECE-R 118 fire protection for rolling stock
PROFINET	Yes

Commercial data

Packaging size	1
Net weight	33,700 g
Country of origin	Germany
European customs tariff number	85444920
GTIN	5713140273450
eCl@ss	27061801 Data and communication cable (copper)
ETIM	EC003249
UNSPSC 24.0	26121609