

LOC		DIST		REVISIONS				
CM	00	P	LTR	DESCRIPTION		DATE	DWN	APVD
		K		REVISED PER 0638-0278-03		29-JUL-03	KW	SR
		L		REVISED PER 0638-1094-04		07FEB05	KW	SR





1. PARTS COMPLY TO AMP SOLDERABILITY SPECIFICATION 109-11-3.

2. CIRCUIT IDENTIFICATION CHARACTERS ARE ADJACENT TO THE INDICATED CAVITIES, BUT LOCATION AND ORIENTATION MAY DIFFER FROM PRINT.



3. DIMENSIONS IN BRACKETS ARE IN INCHES.

4. CONTACT IS STAMPED FROM PRE-PLATED STOCK WHICH IS PLATED OVERALL WITH 0.00127 [0.000050] NICKEL: THEN STRIPED WITH 0.0076 [0.000030] GOLD IN CONTACT AREA INDICATED AND MATTE TIN LEAD ON SOLDER TAIL END.

5. CONTACT IS STAMPED FROM PRE-PLATED STOCK WHICH IS PLATED OVERALL WITH 0.00127 [0.000050] NICKEL: THEN STRIPED WITH 0.0076 [0.000030] GOLD IN CONTACT AREA INDICATED AND MATTE TIN ON SOLDER TAIL END.

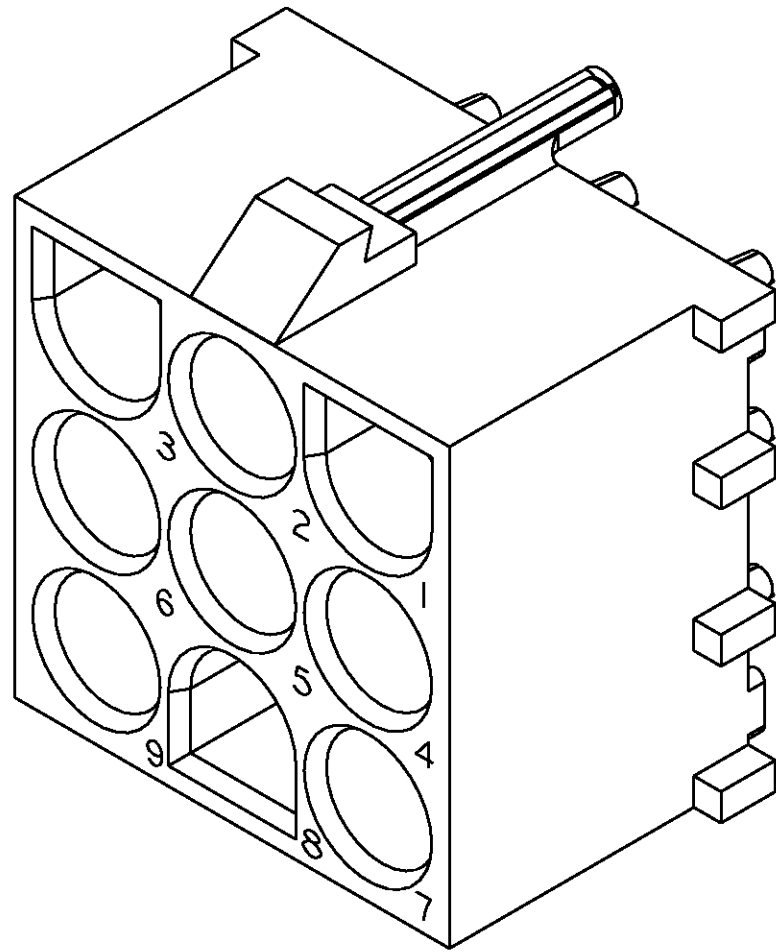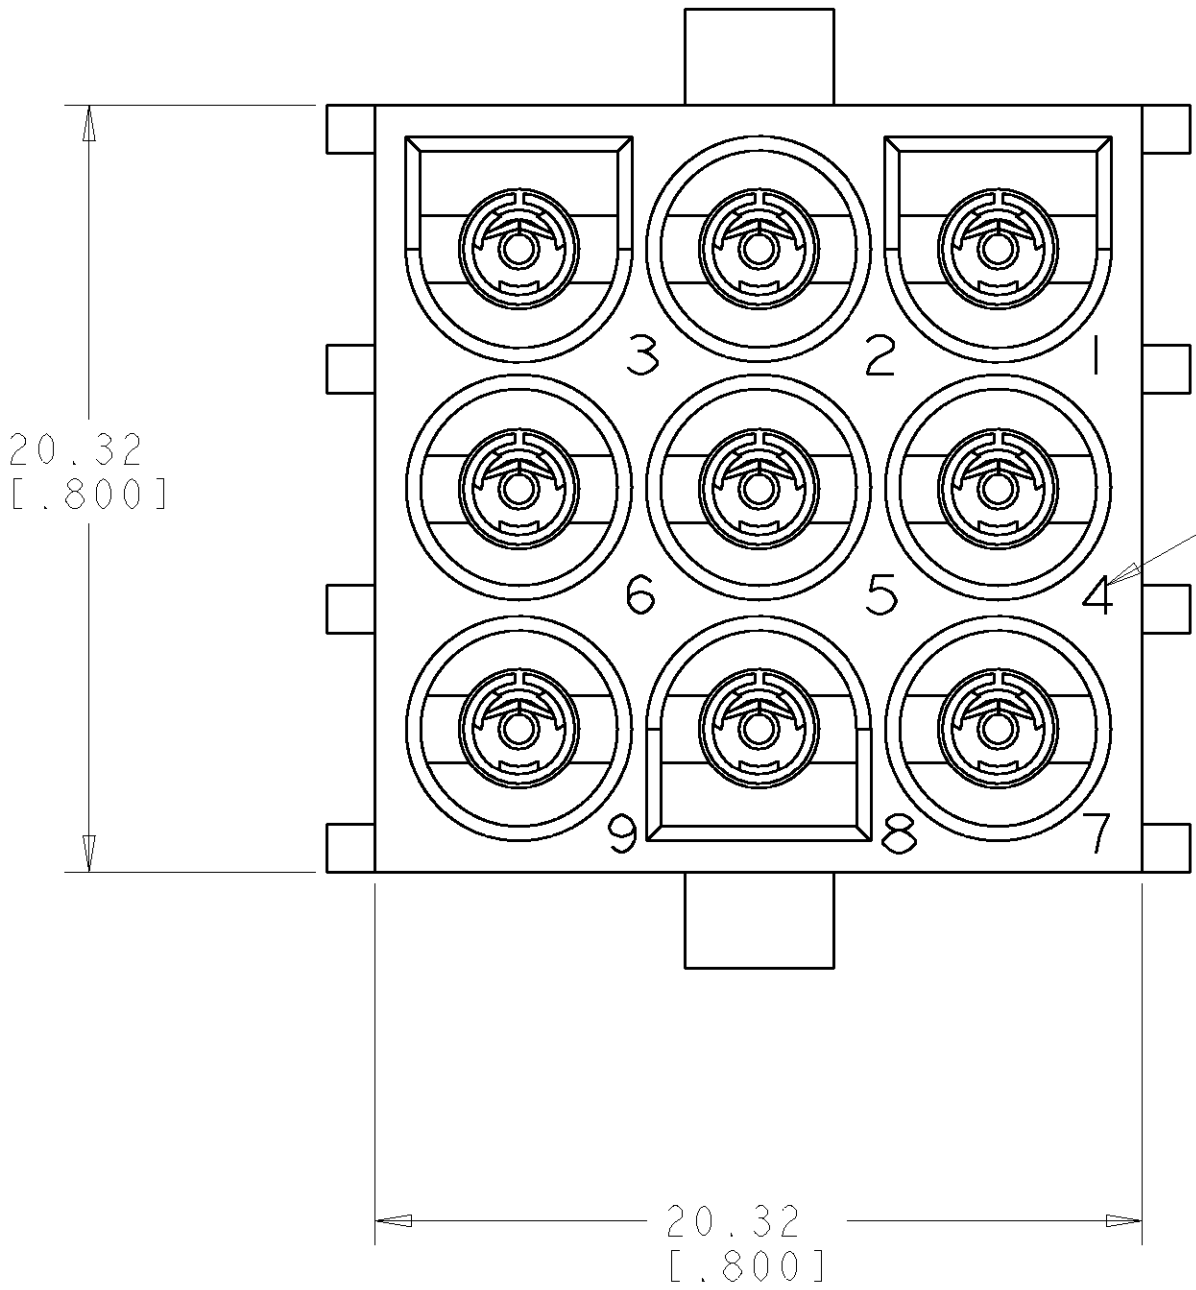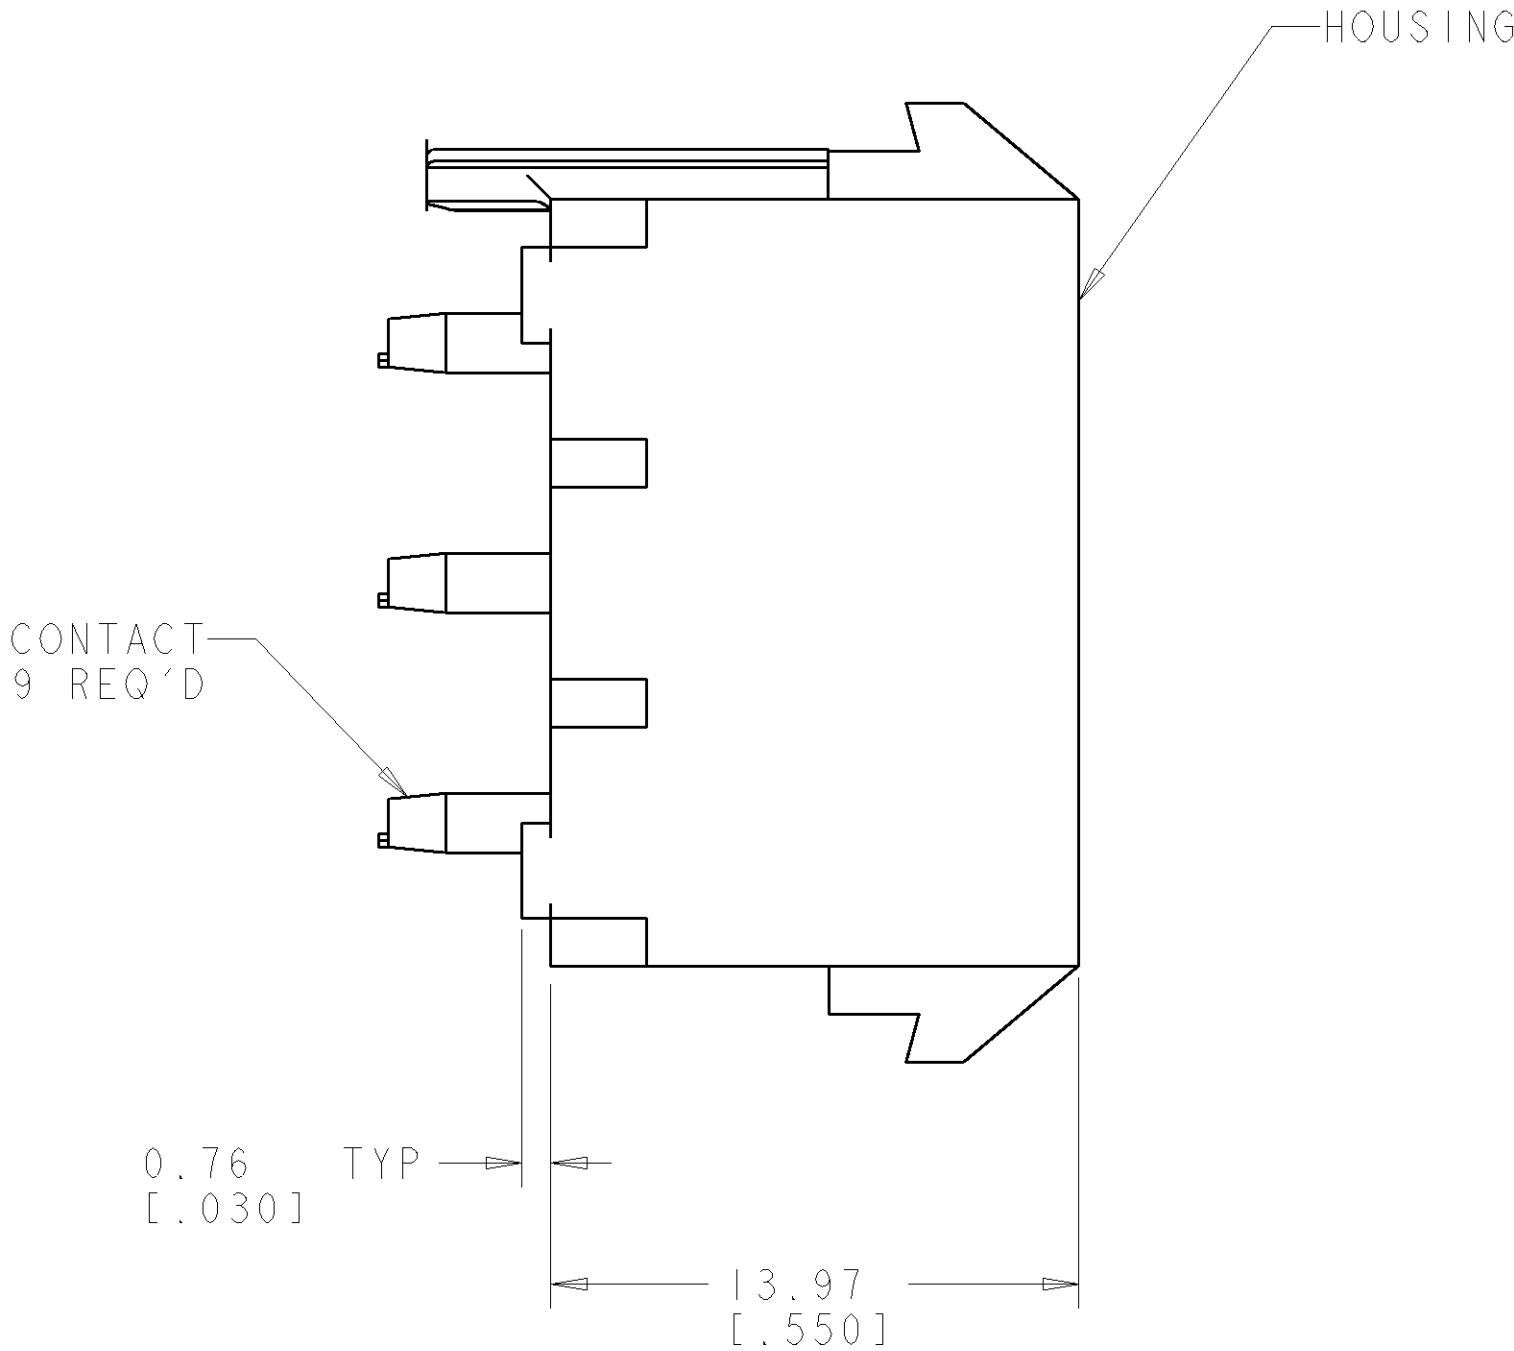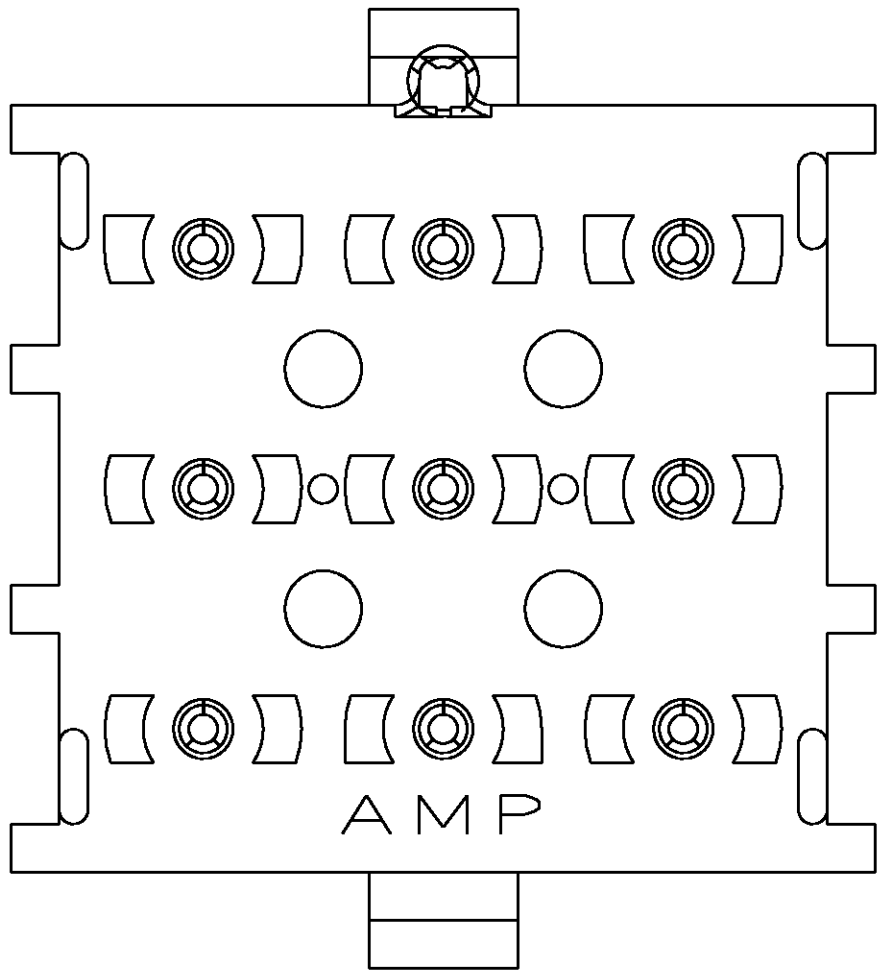

3 DIMENSIONAL MODEL
SCALE 4:1

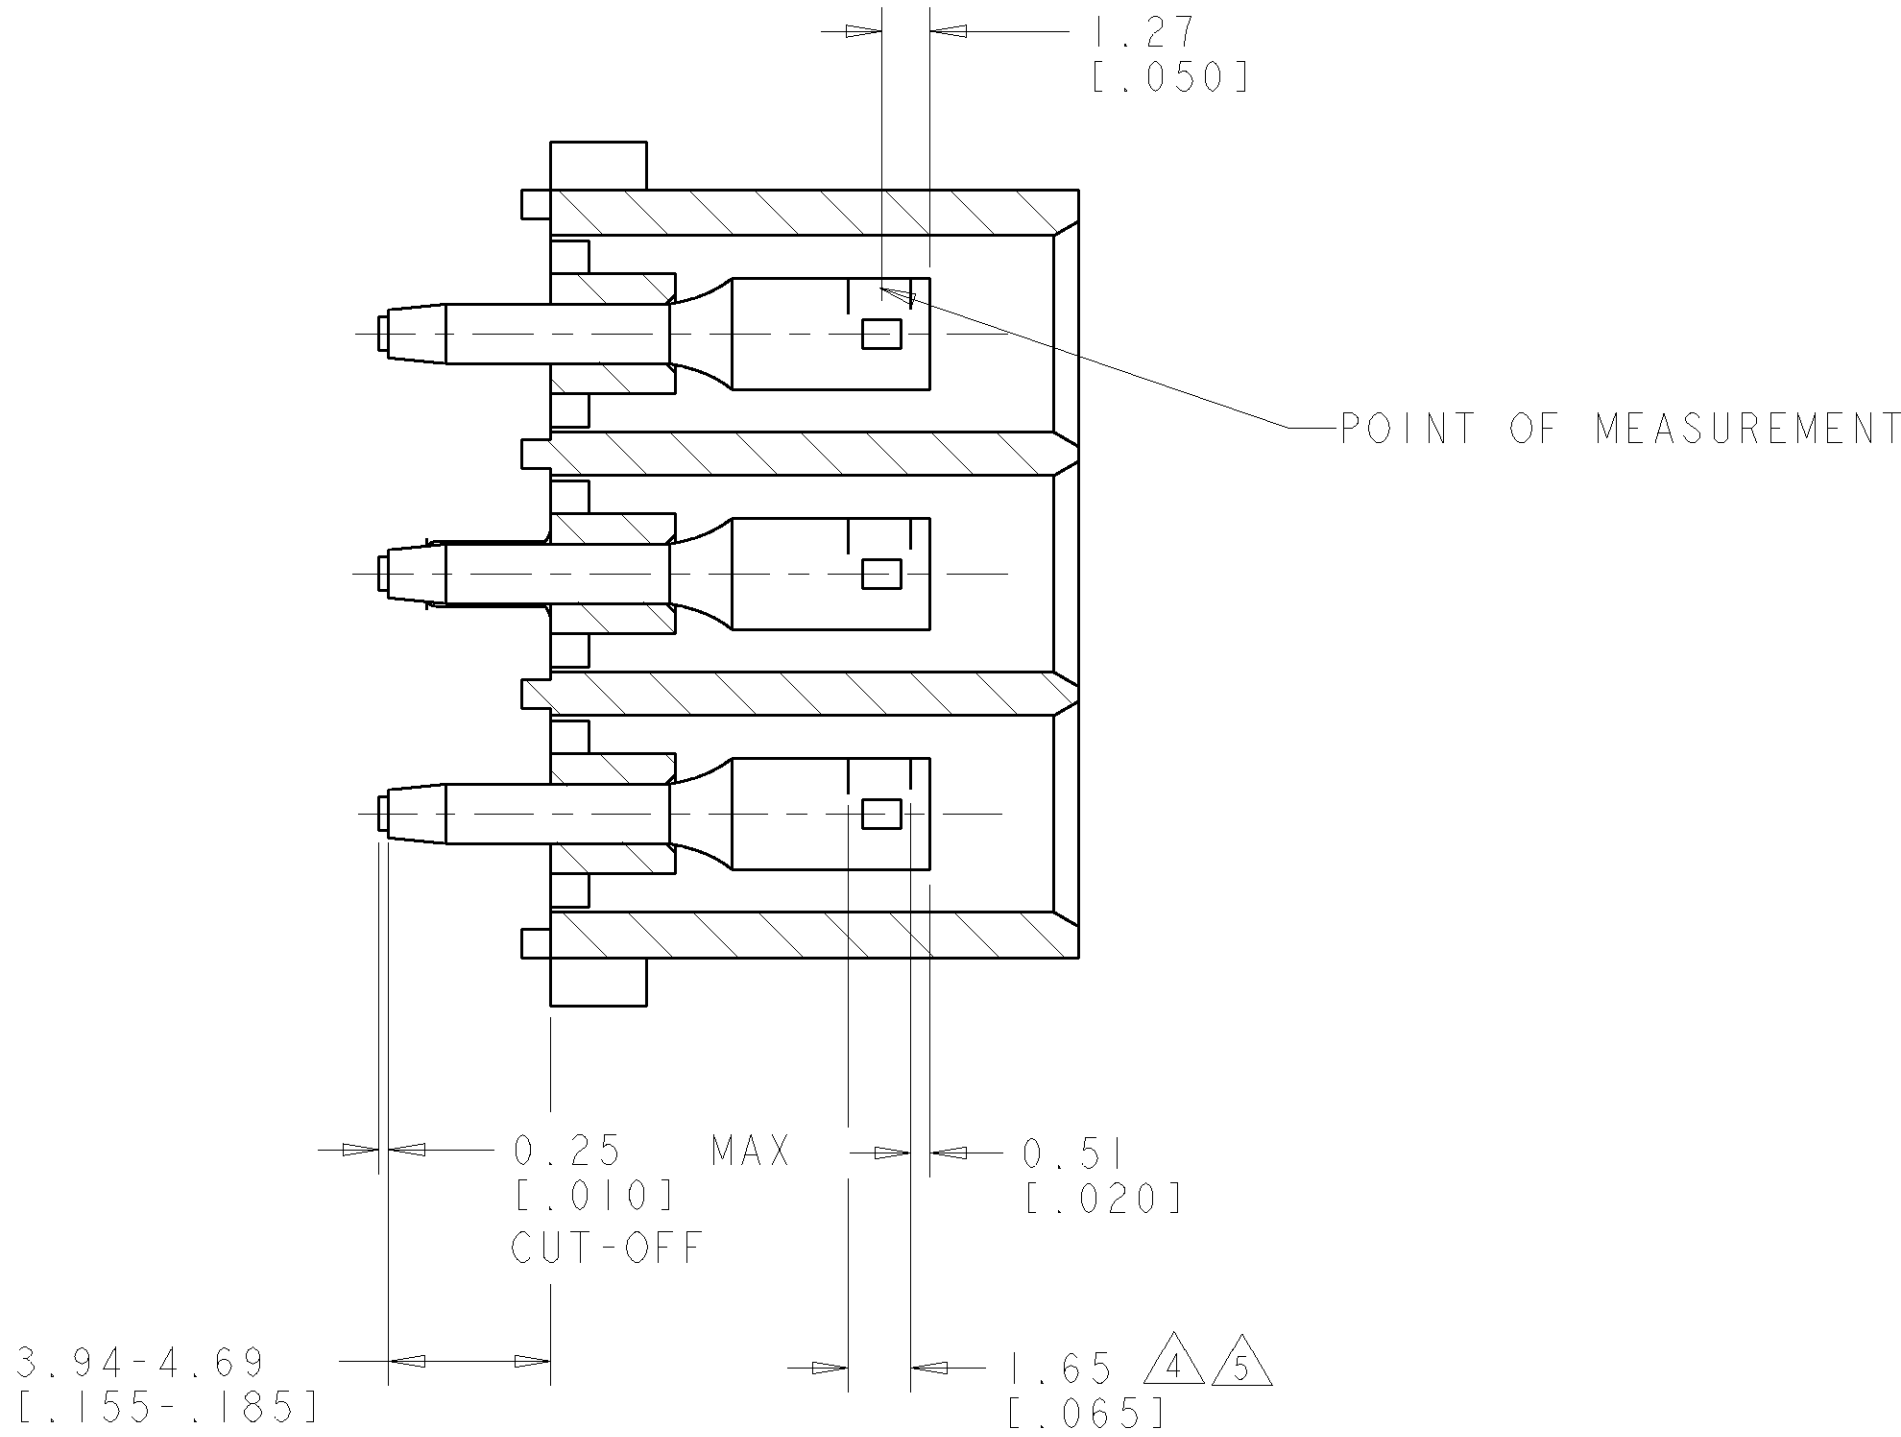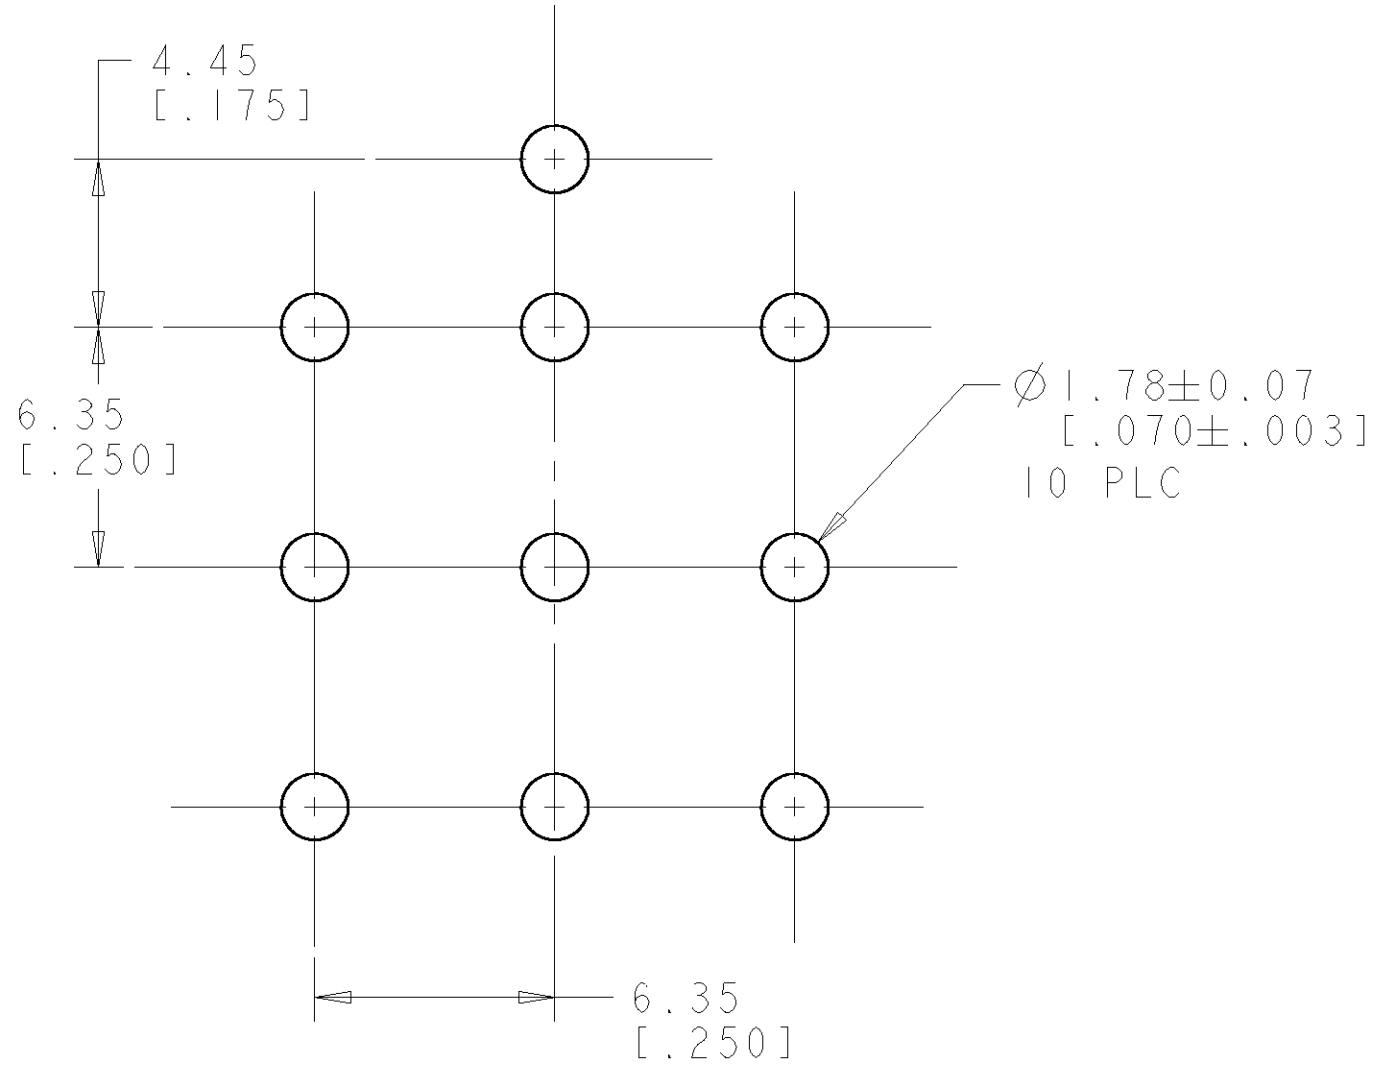

PHOSPOR BRONZE, GOLD 5	NYLON, UL94V-0	643426-3
PHOSPOR BRONZE, GOLD 4	NYLON, UL94V-0	643426-2
PHOSPOR BRONZE, PRE-TIN	NYLON, UL94V-0	643426-1
PIN CONTACT MATERIAL AND FINISH	HOUSING MATERIAL	PART NUMBER

DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		DWN R. WHITAKER 29-JUL-2003 CHK S. RIDGILL 29-JUL-2003 APVD S. RIDGILL 29-JUL-2003		Tyco Electronics Harrisburg, PA 17105-3608	
9 PLC ±		12 PLC ±0.13C.0053		PRODUCT SPEC		NAME	
3 PLC ±		4 PLC ±		APPLICATION SPEC		SIZE	
MATERIAL SEE TABLE		FINISH SEE TABLE		WEIGHT		A 00779 C=643426	
				CUSTOMER DRAWING		SCALE 5:1 SHEET 1 OF 1 REV L	

METRIC