



SAFETY POS. SWITCH W. SEPARATE ACTUATOR,
METAL HOUSING, 56MM,
DEVICE CONNECTION 3X(M20X1.5) SLOW-ACTION
CONTACTS 1NC/2NO;
W. 2 LEDS 24V DC YELLOW/GREEN 5 DIRECTIONS OF
APPROACH

General technical details:

product designation		position switch with separate actuator
Type of voltage / of the supply voltage • of the optional LED display		DC
Insulation voltage • rated value	V	400
Degree of pollution		class 3
Thermal current	A	6
Operating current • at DC-13 • at 24 V / rated value	A	3
Continuous current • of the slow DIAZED fuse link • of the quick DIAZED fuse link • of the C characteristic circuit breaker	A A A	6 10 1
Mechanical operating cycles as operating time • typical		1,000,000
Electrical operating cycles as operating time • with contactor 3RH11, 3RT1016, 3RT1017, 3RT1024, 3RT1025, 3RT1026 / typical		1,000,000

Electrical operating cycles in one hour • with contactor 3RH11, 3RT1016, 3RT1017, 3RT1024, 3RT1025, 3RT1026		6,000
Repeat accuracy	mm	0.05
Design of the contact element		slow-action contacts
Number of NC contacts • for auxiliary contacts		2
Design of the switching function		positive opening
Number of NO contacts • for auxiliary contacts		1
Resistance against vibration		0.35 mm / 5g
Resistance against shock		30g / 11 ms
Ambient temperature • during operating • during storage	°C °C	-25 ... +60 -40 ... +90
Width of the sensor	mm	56
material • of the housing		metal
Material / of the housing / of the switch head		metal
Design of the operating mechanism		5 directions of approach
Actuating speed	mm/s / m/s	0.4 ... 0.5
Minimum actuating force / in activation direction	N	20
Protection class IP		IP66/IP67
Built in orientation		any
Cable gland version		3 x (M20 x 1.5)
Design of the electrical connection		screw-type terminals
Item designation • according to DIN 40719 extendable after IEC 204-2 • according to DIN EN 61346-2		S B

Certificates/approvals:

General Product Approval

Functional Safety /
Safety of
Machinery

Declaration of
Conformity



other

[Confirmation](#)

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

CAX-Online-Generator


<http://www.siemens.com/cax>


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3SE5122-1QV10/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3SE5122-1QV10

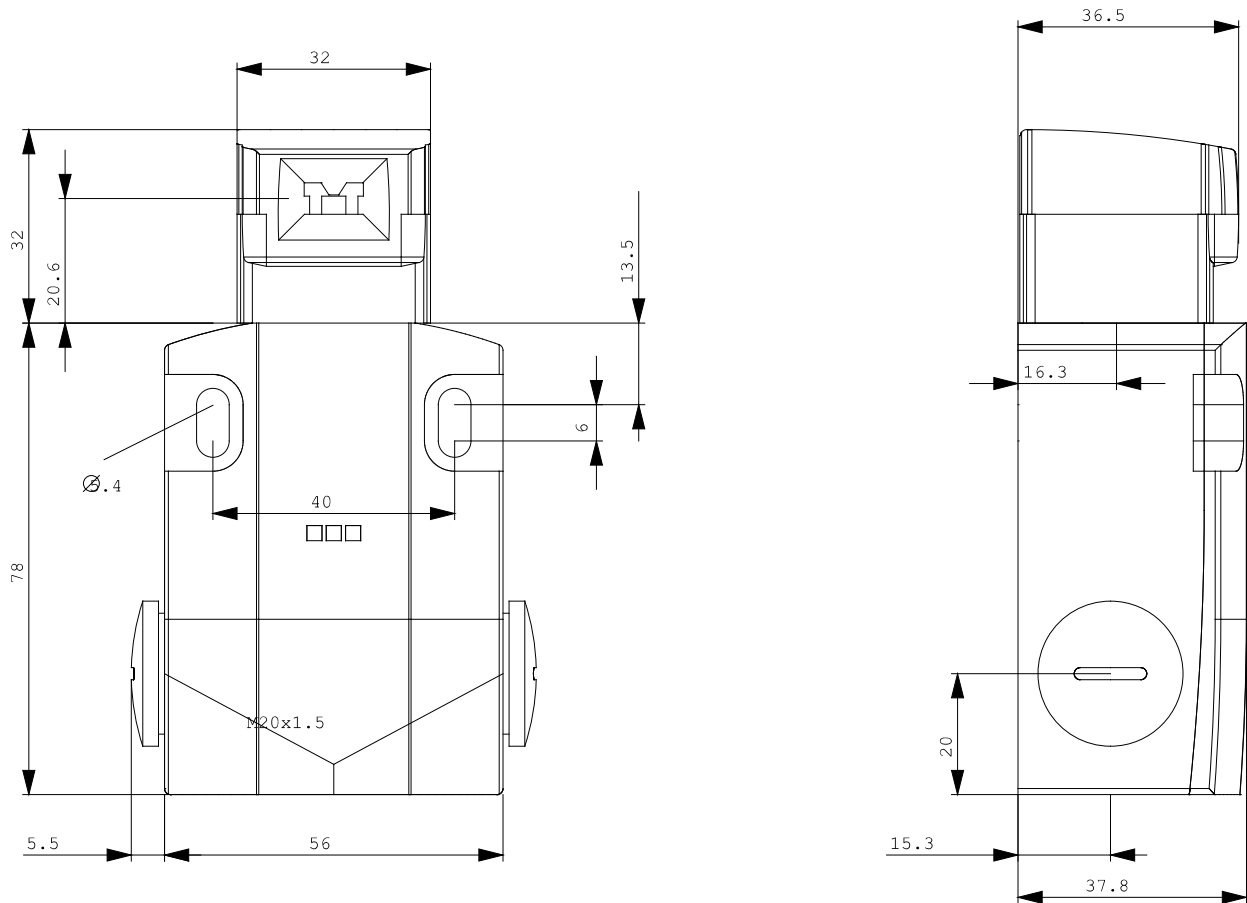

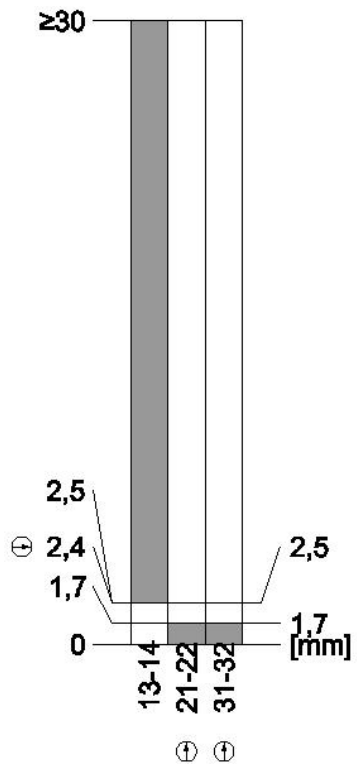

last change:

Mar 24, 2012