REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A		2016/11/23	Victor Hung	Change Rev.01 To Rev.A
B	C192027	2019/11/21	Vicky	B X4
C	C231238	2023/09/20	Vicky	C X1





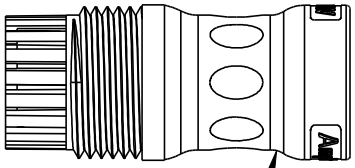



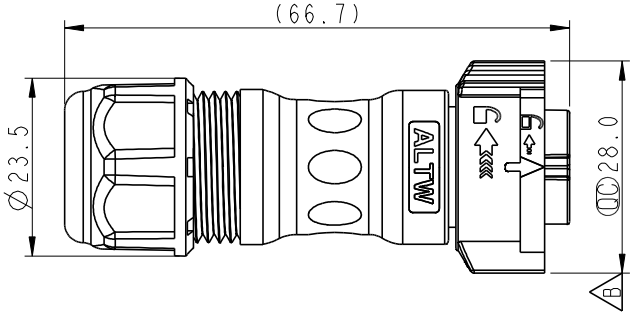

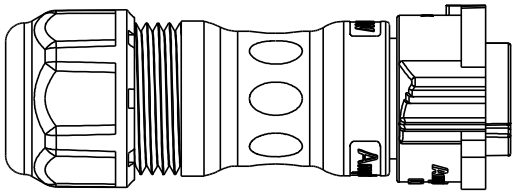



CD-XXBFFA-QL8XP0

- 08- 8Pin
- 09- 9Pin
- 10-10Pin
- 12-12Pin

- S: With Red Color Seal 1, Cable OD 6.0~8.0mm.
- M: With Yellow Color Seal 2, Cable OD 8.0~10.0mm.
- L: With Blue Color Seal 3, Cable OD 10.0~12.0mm.
- A: With Seal 1 & Seal 2 & Seal 3.

B Note:
* QC Important Dimension
* Waterproof Rate: IP68, Mated
  IP68: 1M Depth Of Water In 24hour
* Housing: Thermoplastic, Black
* Pin: Copper Alloy, Gold Plated
* Clamp Ring: Thermoplastic, Black
* Sealing Nut: Thermoplastic, Black
* Seals: Rubber
C * One set unassembled in one pe bag

Pin Assignments Front View


8 Pin


9 Pin


10 Pin


12 Pin

UNIT: mm	TITLE: XLOK, C-5A, CABLE W/O SR F, F, FI CRIMP, XLOK B	Amphenol LTW 安費諾亮泰企業股份有限公司	ITEM NO
TOLERANCE ±0.5mm	SCALE 1:1 / SIZE A4 / SHEET 1 OF 1		DWG NO CD-XXBFFA-QL8XP0 B
	REV. C / WC-REV. A.5 / QC: Inspection item		CUSTOMER ALTW

DRAWN BY Victor Hung	DATE 2016-11-2	
CHECKED BY Wes Fan	DATE 2016-11-2	
APPROVED BY Kevin Hu	DATE 2016-11-2	

W10814-03