

Product data sheet

Specifications



module XPSATR - Emergency stop and protective guard - 24V DC, time delay 30s

XPSATR11530C

- ❗ Discontinued on: 30 June 2021
- ❗ To be end-of-service on: 31 December 2023

❗ Discontinued - Service only

Main

Range of product	Preventa Safety automation
Product or component type	Preventa safety module
Safety module name	XPSATR
Safety module application	For emergency stop and protective guard applications
Function of module	Emergency stop monitoring 1-channel wiring Protective guard monitoring Emergency stop monitoring 2-channel wiring
Safety level	Can reach PL e/category 4 instantaneous safety outputs conforming to EN/ISO 13849-1 Can reach SILCL 3 time delay safety outputs conforming to EN/IEC 62061
Safety reliability data	DC > 99 % conforming to EN/ISO 13849-1 MTTFd = 85 years conforming to EN/ISO 13849-1 PFHd = 2E-9 1/h conforming to EN/IEC 62061
Type of start	Automatic Manual
Connections - terminals	Cage clamp terminals, removable terminal block, 1 x 0.2...1 x 2.5 mm² solid or flexible without cable end Cage clamp terminals, removable terminal block, 1 x 0.25...1 x 2.5 mm² flexible with cable end, without bezel Cage clamp terminals, removable terminal block, 1 x 0.25...1 x 2.5 mm² flexible with cable end, with bezel Cage clamp terminals, removable terminal block, 2 x 0.5...2 x 1 mm² flexible with cable end, with bezel Cage clamp terminals, removable terminal block
Output type	Relay instantaneous opening, 3 NO circuit(s), volt-free Relay time delay opening, 3 NO circuit(s), volt-free
Number of additional circuits	1 NC
[Us] rated supply voltage	24 V DC - 15...10 %

Complementary

Synchronisation time between inputs	1 s
Maximum power consumption in W	2.8 W DC
Input protection type	Internal, electronic
Time delay range	0...30 s
[Uc] control circuit voltage	24 V DC
Breaking capacity	3 A at 24 V (DC-13) for relay output
Output thermal current	6 A for instantaneous and time delay outputs

[Ith] conventional free air thermal current	8 A
Associated fuse rating	6 A gG for instantaneous and time delay outputs conforming to EN/IEC 60947-5-1, DIN VDE 0660 part 200
Minimum output current	10 mA for relay output
Minimum output voltage	17 V for relay output
Maximum response time on input open	20 ms
[Ui] rated insulation voltage	300 V
[Uimp] rated impulse withstand voltage	4 kV overvoltage category III conforming to EN/IEC 60947-5-1, DIN VDE 0110 parts 1 & 2
Local signalling	5 LEDs
Mounting support	35 mm symmetrical DIN rail
Net weight	0.33 kg

Environment

Standards	EN/IEC 60947-5-1 EN/IEC 61496-1 EN 62061 EN/ISO 13849-1 EN 60204-1 EN 50156-1
Product certifications	CSA TÜV UL
IP degree of protection	IP20 (terminals) conforming to EN/IEC 60529 IP40 (enclosure) conforming to EN/IEC 60529
Ambient air temperature for operation	-25...55 °C
Ambient air temperature for storage	-25...75 °C

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	324.0 g
Package 1 Height	6.2 cm
Package 1 width	11.5 cm
Package 1 Length	12.5 cm
Unit Type of Package 2	S02
Number of Units in Package 2	12
Package 2 Weight	4.282 kg
Package 2 Height	15 cm
Package 2 width	30 cm
Package 2 Length	40 cm

Offer Sustainability


Sustainable offer status	Green Premium product
REACH Regulation	REACH Declaration
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration

Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS declaration
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End of Life Information
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins
PVC free	Yes
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Contractual warranty

Warranty	18 months
----------	-----------

Dimensions

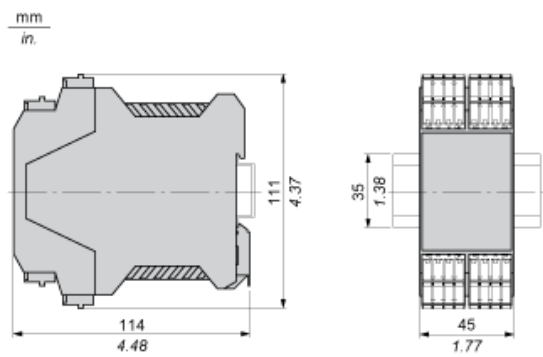

Recommended replacement(s)

XPSATR11530C is replaced by:

1x



Safety module, Harmony Safety Automation, Cat.4, features XPSUAK + delayed outputs, 24v AC/DC, spring
XPSUAT13A3AC