

NBC-MSX/10,0-94S SCO RAIL - Network cable



1415601

<https://www.phoenixcontact.com/gb/products/1415601>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Network cable, Ethernet CAT6_A (10 Gbps), 8-position, PE-X halogen-free, black, shielded, Plug straight M12 SPEEDCON, coding: X / IP65, on free cable end, cable length: 10 m

Your advantages

- Easy and safe: 100 % electrically tested plug-in components
- Securely locked by special vibration brake
- Resistant to temperature influences – tested for an extended temperature range and for resistance to temperature shocks
- Reliable signal transmission – 360° shielding in environments with electromagnetic interference

Commercial data

Item number	1415601
Packing unit	1 pc
Minimum order quantity	1 pc
Note	Made to order (non-returnable)
Sales key	AF1CMJ
Product key	AF1CMJ
Catalog page	Page 404 (C-2-2019)
GTIN	4055626047683
Weight per piece (including packing)	602.5 g
Weight per piece (excluding packing)	602.5 g
Customs tariff number	85444210
Country of origin	PL

1415601

<https://www.phoenixcontact.com/gb/products/1415601>

Technical data

Product properties

Product type	Data cable preassembled
Application	Railway applications
Sensor type	Ethernet
Number of positions	8
No. of cable outlets	1
Shielded	yes
Coding	X

Interfaces

Bus system	Ethernet
Signal type/category	Ethernet CAT6 _A , 10 Gbps

Signaling

Status display	no
Status display present	no

Electrical properties

Nominal voltage U_N	48 V AC
	60 V DC
Nominal current I_N	0.5 A
Transmission medium	Copper
Transmission characteristics (category)	CAT6 _A

Connector

Connection 1

Type	Plug straight M12 SPEEDCON / IP65
Number of positions	8
Locking type	SPEEDCON
Coding type	X (Data)
Handle color	black
Material	CuZn (Contact)
	Ni/Au (Contact surface)
	TPU (Contact carrier)
	PA 6.6 (Grip body)
	Zinc die-cast, nickel-plated (Screw connection)
Standards/regulations	PA 6.6: Fire protection in rail vehicles - requirement sets R22, R23, and R24 acc. to DIN EN 45545-2 (Risk level HL1 - HL3)
Insertion/withdrawal cycles	≥ 100
Insulation resistance	≥ 100 MΩ
Tightening torque	0.4 Nm

NBC-MSX/10,0-94S SCO RAIL - Network cable



1415601

<https://www.phoenixcontact.com/gb/products/1415601>

Degree of protection	IP65
	IP67
Ambient temperature (operation)	-25 °C ... 90 °C

Connection 2

Type	free cable end
------	----------------

Cable/line

Cable length	10 m
--------------	------

Ethernet BETAtrans® railway application CAT7 [94S]

Dimensional drawing	
Cable weight	59 kg/km
Copper weight	28 kg/km
Number of positions	8
Shielded	yes
Cable type	Ethernet BETAtrans® railway application CAT7 [94S]
Conductor structure	4x2xAWG26/7; S/FTP
Signal runtime	4.4 ns/m
Signal speed	0.78 c
Conductor structure signal line	7x 0.16 mm
AWG signal line	26
Conductor cross section	4x 2x 0.14 mm ²
Wire diameter incl. insulation	1.05 mm ±0.1 mm
External cable diameter	6.60 mm ±0.2 mm
Outer sheath, material	PE-X
External sheath, color	black
Conductor material	Tin-plated Cu litz wires
Material wire insulation	Cell PE
Single wire, color	white-blue, white-orange, white-green, white-brown
Twisted pairs	2 cores to the pair
Type of pair shielding	Aluminum-lined polyester foil
Overall twist	4 pairs, twisted
Max. conductor resistance	≤ 145 Ω/km
Insulation resistance	≥ 5 GΩ*km
Coupling resistance	5.00 mΩ/m (at 10 MHz)
Wave impedance	100 Ω ±5 Ω (at 100 MHz)
Working capacitance	44 nF (per kilometer)

NBC-MSX/10,0-94S SCO RAIL - Network cable



1415601

<https://www.phoenixcontact.com/gb/products/1415601>

Nominal voltage, cable	125 V AC (U ₀)
Test voltage Core/Core	1000 V AC (50 Hz, 1 min.)
Test voltage Core/Shield	1000.00 V AC (50 Hz, 1 min.)
Minimum bending radius, fixed installation	6 x D
Smallest bending radius, fixed installation	40 mm
Tensile strength	≤ 60 N (temporary)
	≤ 15 N (Permanent)
Near end crosstalk attenuation (NEXT)	100 dB (with 1 MHz)
	99 dB (at 10 MHz)
	95 dB (at 100 MHz)
	92 dB (at 200 MHz)
	90 dB (at 250 MHz)
	83 dB (at 500 MHz)
	81 dB (at 600 MHz)
	80 dB (at 700 MHz)
	77 dB (at 800 MHz)
	75 dB (at 900 MHz)
	74 dB (at 1000 MHz)
	72 dB (at 1100 MHz)
Power-summated near end crosstalk attenuation (PSNEXT)	70 dB (at 1200 MHz)
	97 dB (with 1 MHz)
	96 dB (at 10 MHz)
	92 dB (at 100 MHz)
	89 dB (at 200 MHz)
	87 dB (at 250 MHz)
	80 dB (at 500 MHz)
	78 dB (at 600 MHz)
	77 dB (at 700 MHz)
	74 dB (at 800 MHz)
	72 dB (at 900 MHz)
	71 dB (at 1000 MHz)
Return attenuation (RL)	69 dB (at 1100 MHz)
	67 dB (at 1200 MHz)
	24 dB (with 1 MHz)
	33.9 dB (at 10 MHz)
	38.3 dB (at 100 MHz)
	35.3 dB (at 200 MHz)
	32.9 dB (at 250 MHz)
	29.7 dB (at 500 MHz)
	30.6 dB (at 600 MHz)
	31 dB (at 700 MHz)
	26.7 dB (at 800 MHz)
	28.6 dB (at 900 MHz)
	27.5 dB (at 1000 MHz)

NBC-MSX/10,0-94S SCO RAIL - Network cable



1415601

<https://www.phoenixcontact.com/gb/products/1415601>

Crosstalk attenuation (ACR)	26.9 dB (at 1100 MHz)
	26.3 dB (at 1200 MHz)
	100.00 dB (with 1 MHz)
	99.00 dB (at 10 MHz)
	93.00 dB (at 100 MHz)
	88.00 dB (at 200 MHz)
	86.00 dB (at 250 MHz)
	78.00 dB (at 500 MHz)
	74.00 dB (at 600 MHz)
	72.00 dB (at 700 MHz)
	69.00 dB (at 800 MHz)
	67.00 dB (at 900 MHz)
	65.00 dB (at 1000 MHz)
	63.00 dB (at 1100 MHz)
	61.00 dB (at 1200 MHz)
Power-summated crosstalk attenuation (PS-ACR)	97 dB (with 1 MHz)
	96 dB (at 10 MHz)
	90 dB (at 100 MHz)
	85 dB (at 200 MHz)
	83 dB (at 250 MHz)
	75 dB (at 500 MHz)
	71 dB (at 600 MHz)
	69 dB (at 700 MHz)
	66 dB (at 800 MHz)
	64 dB (at 900 MHz)
	62 dB (at 1000 MHz)
	60 dB (at 1100 MHz)
	58 dB (at 1200 MHz)
Shield attenuation	0.25 dB (with 1 MHz)
	0.76 dB (at 10 MHz)
	2.49 dB (at 100 MHz)
	3.69 dB (at 200 MHz)
	4.18 dB (at 100 MHz)
	5.6 dB (at 500 MHz)
	6.74 dB (at 600 MHz)
	7.32 dB (at 700 MHz)
	7.89 dB (at 800 MHz)
	8.5 dB (at 900 MHz)
	9.11 dB (at 1000 MHz)
	9.5 dB (at 1100 MHz)
	9.9 dB (at 1200 MHz)
	60.00 dB (up to 1000 MHz)
Halogen-free	in accordance with EN 50267-2-1
	in accordance with EN 60684-2

NBC-MSX/10,0-94S SCO RAIL - Network cable



1415601

<https://www.phoenixcontact.com/gb/products/1415601>

Flame resistance	in accordance with EN 60332-1-2
	EN 60332-3-25
	in accordance with ISO 14572 5.21 (UN ECE-R 118.01)
Concentration of fumes	EN 61034-2
Resistance to oil	in accordance with EN 50306-4, 72 hours at 100°C, IRM 902
Fire protection in rail vehicles	BS 6853 (Internal cable Ia, Ib, II/external cable Ia, Ib, II)
	DIN 5510-2 (Fire protection level 1, 2, 3, 4)
	EN 45545-2 (Risk level HL1 - HL3)
	EN 50306-4
	NF F16-101 (Classification C/F1)
	NF F16-101 (Internal cable A1, A2, B/external cable A1, A2, B)
	NFPA 130
Other resistance	PN-K-02511 (Class A)
	UIC 564-2 (Class A)
	Resistant to fuel (in accordance with EN 50306-4, 168 hours at 70°C, IRM 903)
Ambient temperature (operation)	Resistant to ozone (in accordance with EN 50306-4, 72 hours at 40°C, method B, volumetric concentration of 200×10^{-6})
	-40 °C ... 80 °C (cable, fixed installation)

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP65/IP67
----------------------	-----------


Standards and regulations

M12

Standard designation	M12 connector
Standards/specifications	IEC 61076-2-109
Standard designation	Shock, vibration
Standards/specifications	EN 50155


Drawings

Dimensional drawing

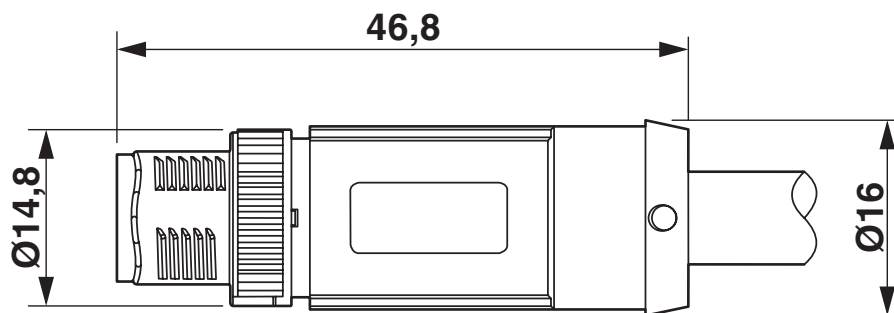

M12 SPEEDCON plug, straight, shielded

Schematic diagram

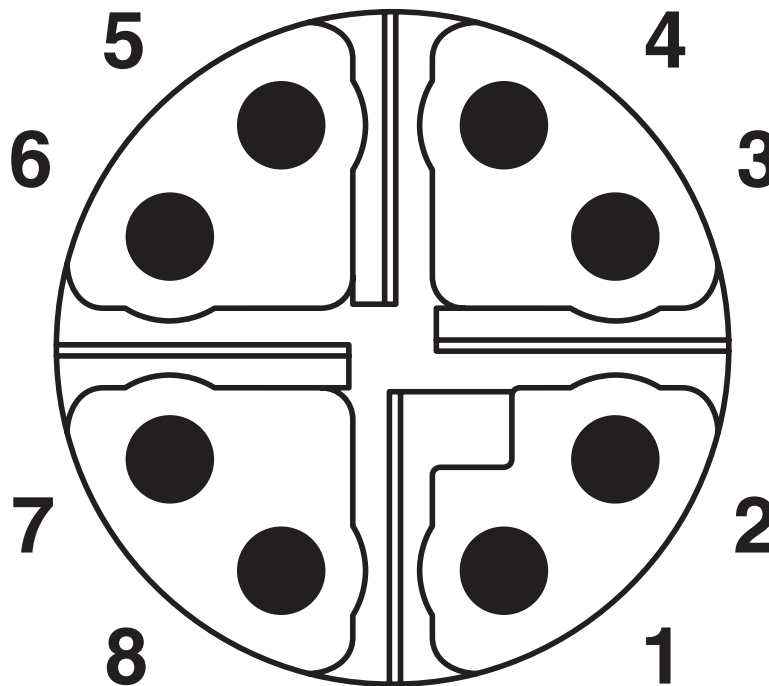


Pin assignment of M12 plug, 8-pos., X-coded, pin side view

1415601

<https://www.phoenixcontact.com/gb/products/1415601>

Circuit diagram

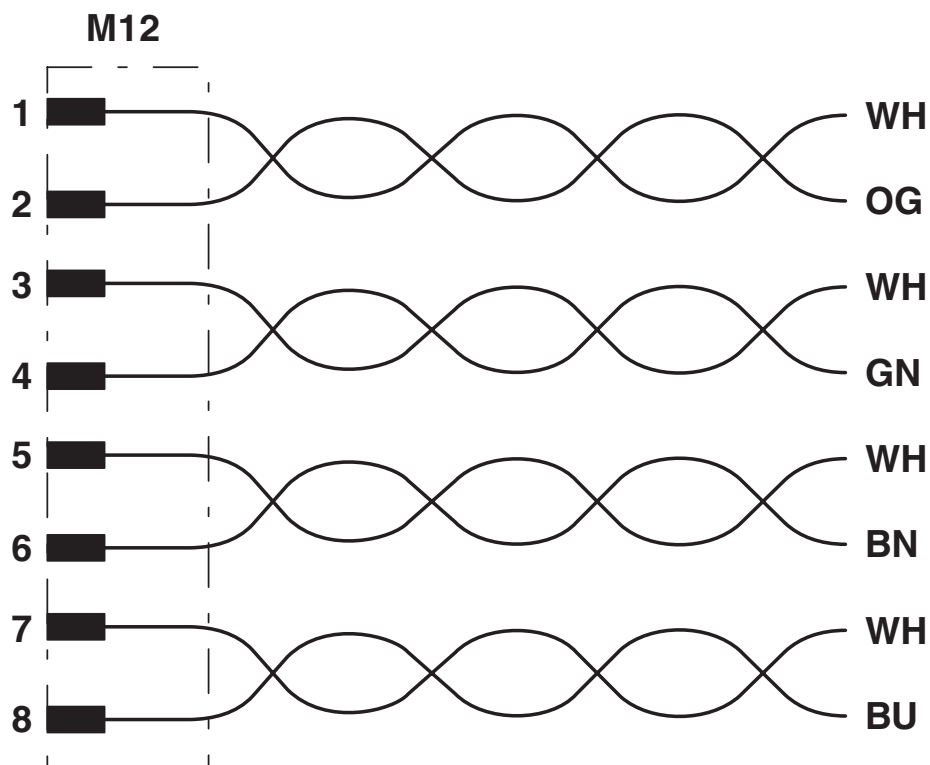

Contact assignment of the M12 plug

NBC-MSX/10,0-94S SCO RAIL - Network cable



1415601

<https://www.phoenixcontact.com/gb/products/1415601>

Approvals

🔗 To download certificates, visit the product detail page: <https://www.phoenixcontact.com/gb/products/1415601>



EAC-RoHS

Approval ID: RU D-DE.HB35.B.00387

NBC-MSX/10,0-94S SCO RAIL - Network cable



1415601

<https://www.phoenixcontact.com/gb/products/1415601>

Classifications

ECLASS

ECLASS-13.0	27060307
-------------	----------

ETIM

ETIM 9.0	EC001855
----------	----------

UNSPSC

UNSPSC 21.0	26121600
-------------	----------

1415601

<https://www.phoenixcontact.com/gb/products/1415601>

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions
---	--------------------

China RoHS

Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits

EU REACH SVHC

REACH candidate substance (CAS No.)	6,6'-di-tert-butyl-2,2'-methylenedi-p-cresol(CAS: 119-47-1)
SCIP	792dc899-529c-446c-8aa6-5730668acda8

EF3.0 Climate Change

CO2e kg	11.729 kg CO2e
---------	----------------

Phoenix Contact 2025 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT Ltd

Halesfield 13, Telford

Shropshire, TF7 4PG

01952 681700

info@phoenixcontact.co.uk