

SM20

LEVEL CONTROLLER OR HIGH POWER INTERFACE MODULE



The SM20 is a versatile level control or interface module that can also be used in many other process control applications.

One level switch can be connected for an alarm or two level switches to start and stop a submersible pump or a solenoid valve for emptying/filling function

It works with all kind of level switches, including conductive probes, as well as pressure switches or other limit switches.

The module can be used as a dry-running protection, with a pressure switch or filling level control switch, to start and stop a pump.

Power supply 240/415 Vac.

Two out-puts:

Main output SPCO 20(8) Ampere 250V

Secondary output SPCO 10(4) Ampere 250V automatic/manual switch

LED indicators for: power supply, low level and output on.

SPECIFICATIONS

Technical

Supply Voltage	V	240 or 415ac
Sensor Voltage	V	12Vac
Sensor Input	switch contacts or conductive probes	

Output Ratings

		Output 1	Output 2
Contact Form		SPCO	SPCO
Switching Power Max ac	VA	1500	750
Switching Power Max dc	W	560	not approved
Switching Voltage AC Max	V	250	250
Switching Voltage DC Max	V	28	not approved
Switching Current Max Resistive	(n/o contact)	A	20
	(n/c contact)	A	10
Switching Current Max Inductive	A	8	4

Features

- Primary output can directly control motors up to 2HP cosF 0.4-0.5 single phase
- 2 SPCO relay outputs
- 12Vac sensor voltage
- 1, 2 or 3 sensor inputs
- 240 or 415Vac supply
- DIN rail mounting


STANDARD PARTS

Standard Parts	Inputs	Outputs
SM20	1, 2 or 3	2

Other versions can be made for particular applications. Please contact Sensata with your requirements.



DIMENSIONS

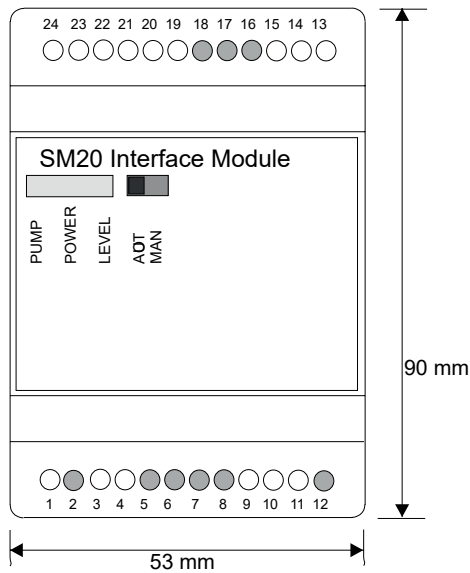

1	Supply Neutral
3	Supply Live 240Vac
4	Supply Live 415Vac
9	Output 1 nc contact
10	Output 1 no contact
11	Output 1 common
13	Output 2 no contact
14	Output 2 common
15	Output 2 nc contact
19-20	Low voltage input sensor
21-22	Sensor common input
23	Sensor minimum level
24	Sensor maximum level

Low voltage input 19-20 for pressure switch with contacts closed at minimum pressure or level switch with contacts closed when level low.

NB These terminals must be bridged if no sensor is connected.



LEVEL CONTROLLER OR HIGH POWER INTERFACE MODULE

The SM20 can be used for many process control functions, including:

- Dry running control with 2 level switches
- Dry running control with 1 level switch
- Dry running control with conductive probes
- Pump control by pressure switch
- Pump control by level switch
- Automatic/manual control selector
- "No water" alarm or secondary control output

Troubleshooting

- Pump does not start, green LED off
- Pump does not start, yellow LED on
- Pump does not start, yellow LED off

No power to module

Check connections 9-10-11 for pump supply

Check link between 19-20. Check pressure or level switch, if fitted. Check system has not already reached maximum pressure or level

- Pump does not start, red LED on

No water in supply tank. Check maximum level switch is correctly installed. Check terminals 21-22-23-24

- Pump does not stop


Check the Auto/Man selector. Check that pressure or level switch, on 19-20, functions correctly.

Example: Rainwater supply

Filling a vented roof tank from a rainwater tank.

The pump will operate when the roof tank level is not at max level and the water in the rainwater tank is above the low level.

The secondary output relay will operate, if the level in the rainwater tank drops to the low level, and opens a solenoid valve to supply water from the mains water supply, which will remain operated until the rainwater tank fills to the high level. The illustration is only for 220/240Vac supply, which is connected to terminals 0 (neutral) and 3 (live).

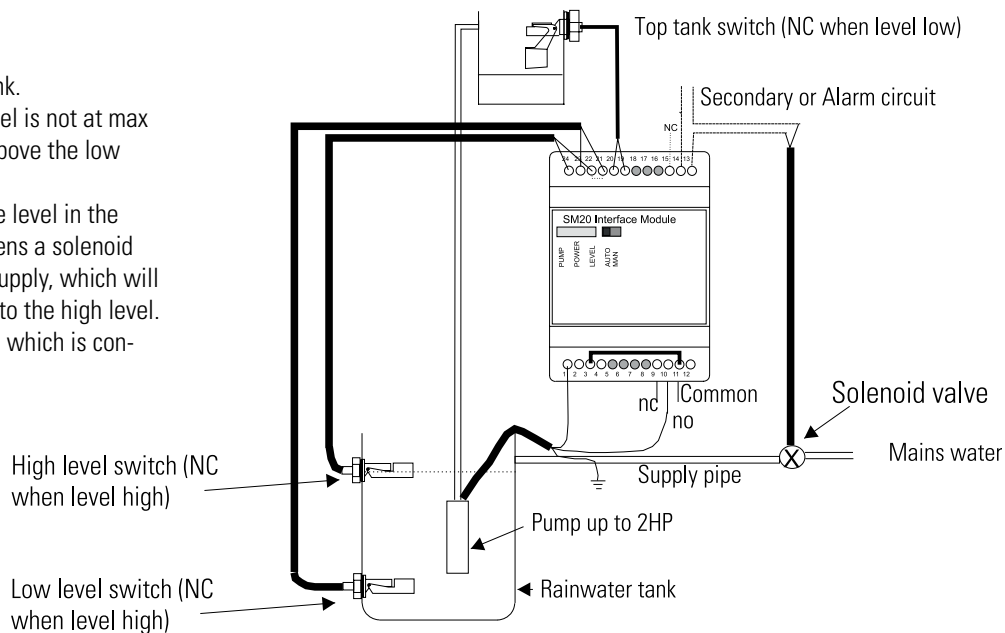


Example: Sump pump to drain

This will pump out a sump from a high level down to a low level.

The pump will be started when the level in the sump reaches the high level and will continue to pump until the level falls to the low level.

The pump can also be operated manually using the switch on the module.

The illustration is only for 220/240Vac supply, which is connected to terminals 0 (neutral) and 3 (live).

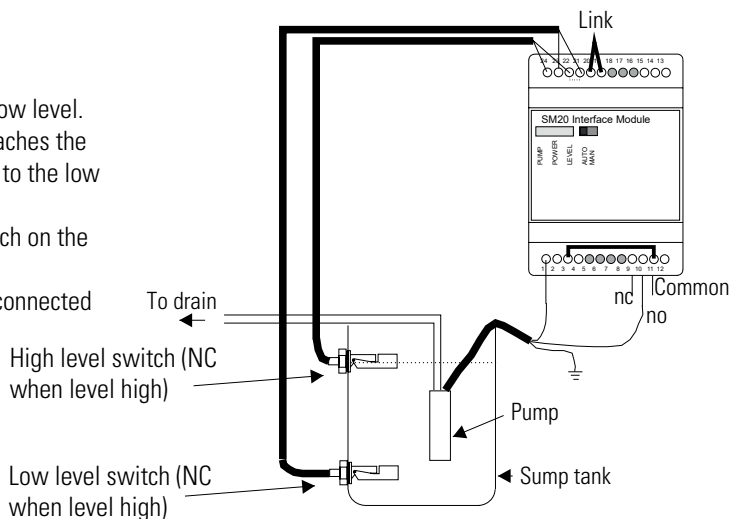

NB The diagrams shown above are simplified illustrations of how the module may be used and do not include any necessary safety devices, such as fuses or thermal cutouts, or statutory requirements for installation of such electrical equipment.

Made in the UK

Page 3

Sensata Technologies, Inc. ("Sensata") data sheets are solely intended to assist designers ("Buyers") who are developing systems that incorporate Sensata products (also referred to herein as "components"). Buyer understands and agrees that Buyer remains responsible for using its independent analysis, evaluation and judgment in designing Buyer's systems and products. Sensata data sheets have been created using standard laboratory conditions and engineering practices. Sensata has not conducted any testing other than that specifically described in the published documentation for a particular data sheet. Sensata may make corrections, enhancements, improvements and other changes to its data sheets or components without notice.

Buyers are authorized to use Sensata data sheets with the Sensata component(s) identified in each particular data sheet. HOWEVER, NO OTHER LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE TO ANY OTHER SENSATA INTELLECTUAL PROPERTY RIGHT, AND NO LICENSE TO ANY THIRD PARTY TECHNOLOGY OR INTELLECTUAL PROPERTY RIGHT, IS GRANTED HEREIN. SENSATA DATA SHEETS ARE PROVIDED "AS IS". SENSATA MAKES NO WARRANTIES OR REPRESENTATIONS WITH REGARD TO THE DATA SHEETS OR USE OF THE DATA SHEETS, EXPRESS, IMPLIED OR STATUTORY, INCLUDING ACCURACY OR COMPLETENESS. SENSATA DISCLAIMS ANY WARRANTY OF TITLE AND ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, QUIET ENJOYMENT, QUIET POSSESSION, AND NON-INFRINGEMENT OF ANY THIRD PARTY INTELLECTUAL PROPERTY RIGHTS WITH REGARD TO SENSATA DATA SHEETS OR USE THEREOF.

All products are sold subject to Sensata's terms and conditions of sale supplied at www.sensata.com SENSATA ASSUMES NO LIABILITY FOR APPLICATIONS ASSISTANCE OR THE DESIGN OF BUYERS' PRODUCTS. BUYER ACKNOWLEDGES AND AGREES THAT IT IS SOLELY RESPONSIBLE FOR COMPLIANCE WITH ALL LEGAL, REGULATORY AND SAFETY-RELATED REQUIREMENTS CONCERNING ITS PRODUCTS, AND ANY USE OF SENSATA COMPONENTS IN ITS APPLICATIONS, NOTWITHSTANDING ANY APPLICATIONS-RELATED INFORMATION OR SUPPORT THAT MAY BE PROVIDED BY SENSATA.

Mailing Address: Sensata Technologies, Inc., 529 Pleasant Street, Attleboro, MA 02703, USA.

CONTACT US

Cynergy3 Components Ltd.
7 Cobham Road,
Ferndown Industrial Estate,
Wimborne, Dorset,
BH21 7PE, United Kingdom