


Eaton 239372

Catalog Number: 239372

Eaton Moeller® series DILM Reversing bridge, for DILM7-M12
DILM12-XRA2

General specifications

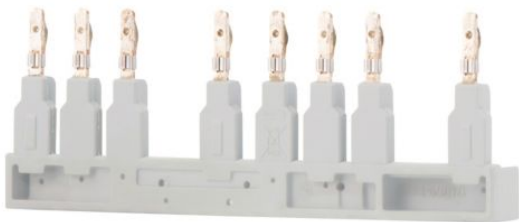

Product Name	Catalog Number
Eaton Moeller® series DILM reversing bridge	239372
	EAN
	4015082393724
Product Length/Depth	Product Height
30 mm	6.8 mm
Product Width	Product Weight
90 mm	0.014 kg

Certifications

CSA File No.: 012528
UL File No.: E36332
UL 508
CSA
CSA-C22.2 No. 14-05
UL Category Control No.: NLRV
CE
UL
IEC/EN 60947-4-1
CSA Class No.: 3211-05

General

Accessory/spare part type

Connecting bridge

Product category

Accessories

Climatic environmental conditions

Ambient operating temperature - min

-25 °C

Ambient operating temperature - max

60 °C

Design verification

Equipment heat dissipation, current-dependent P_{vid}

2.1 W

Heat dissipation capacity P_{diss}

0 W

Heat dissipation per pole, current-dependent P_{vid}

0.7 W

Rated operational current for specified heat dissipation (I_n)

22 A

Static heat dissipation, non-current-dependent P_{vs}

0 W

10.2.2 Corrosion resistance

Meets the product standard's requirements.

10.2.3.1 Verification of thermal stability of enclosures

Meets the product standard's requirements.

10.2.3.2 Verification of resistance of insulating materials to normal heat

Meets the product standard's requirements.

10.2.3.3 Resist. of insul. mat. to abnormal heat/fire by internal elect. effects

Meets the product standard's requirements.

10.2.4 Resistance to ultra-violet (UV) radiation

Meets the product standard's requirements.

10.2.5 Lifting

Does not apply, since the entire switchgear needs to be evaluated.

10.2.6 Mechanical impact

Does not apply, since the entire switchgear needs to be evaluated.

10.2.7 Inscriptions

Meets the product standard's requirements.

Resources

Catalogs

Product Range Catalog Switching and protecting motors

[eaton-product-overview-for-machinery-catalogue-ca08103003zen-en-us.pdf](#)

SmartWire-DT Catalog

Declarations of conformity

[DA-DC-00004811.pdf](#)

[DA-DC-00004792.pdf](#)

[DA-DC-00004777.pdf](#)

[DA-DC-00004789.pdf](#)

[DA-DC-00004810.pdf](#)

Drawings

[eaton-star-delta-starters-star-delta-dilm-accessory-3d-drawing.eps](#)

eCAD model

[ETN.239372.edz](#)

Installation instructions

[IL03407035Z2021_06.pdf](#)

Installation videos

WIN-WIN with push-in technology

mCAD model

[dil_m12_xra2](#)

[dil_m12_xra2.stp](#)

10.3 Degree of protection of assemblies

Does not apply, since the entire switchgear needs to be evaluated.

10.4 Clearances and creepage distances

Meets the product standard's requirements.

10.5 Protection against electric shock

Does not apply, since the entire switchgear needs to be evaluated.

10.6 Incorporation of switching devices and components

Does not apply, since the entire switchgear needs to be evaluated.

10.7 Internal electrical circuits and connections

Is the panel builder's responsibility.

10.8 Connections for external conductors

Is the panel builder's responsibility.

10.9.2 Power-frequency electric strength

Is the panel builder's responsibility.

10.9.3 Impulse withstand voltage

Is the panel builder's responsibility.

10.9.4 Testing of enclosures made of insulating material

Is the panel builder's responsibility.

10.10 Temperature rise

The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.

10.11 Short-circuit rating

Is the panel builder's responsibility. The specifications for the switchgear must be observed.

10.12 Electromagnetic compatibility

Is the panel builder's responsibility. The specifications for the switchgear must be observed.

10.13 Mechanical function

The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.



Eaton Corporation plc
Eaton House
30 Pembroke Road
Dublin 4, Ireland
Eaton.com
© 2024 Eaton. All Rights Reserved.

Eaton is a registered trademark.

All other trademarks are
property of their respective
owners.



Eaton.com/socialmedia