

# XB6EDW6J1P

rectangle blue illuminated pushbutton Ø16-  
flush springreturn12 VDC polarised-1CO



## Main

Range of product	Harmony XB6E
Product or component type	Illuminated monolithic push-button
Device short name	XB6E
Bezel material	Plastic
Mounting diameter	16 mm
Sale per indivisible quantity	5
Shape of signaling unit head	Rectangular
Type of operator	Spring return
Operator profile	Blue flush
Contacts type and composition	1 C/O
Contact operation	Snap action
Connections - terminals	Insulated faston, connection size: 2.8 x 0.5 mm Solder terminal, clamping capacity: <= 0.75 mm² AWG 19 Fast connector socket
Contacts material	Gold-flashed silver
Light source	Integral LED
[Us] rated supply voltage	12 V DC polarised

## Complementary







Net weight	0.006 kg
Operating position	Any position
Marking	CE
Mechanical durability	1000000 cycles
Contact resistance	50 mOhm at 1/6 V
Short-circuit protection	2 A cartridge fuse type gG
[Ith] conventional free air thermal current	3 A (fast connector socket) 5 A
[Ie] rated operational current	1.5 A at 120 V, AC-12 conforming to EN/IEC 60947-5-1 1 A at 240 V, AC-12 conforming to EN/IEC 60947-5-1 1 A at 24 V, DC-12 conforming to EN/IEC 60947-5-1 0.7 A at 24 V, DC-13 conforming to EN/IEC 60947-5-1 0.2 A at 125 V, DC-12 conforming to EN/IEC 60947-5-1 0.15 A at 125 V, DC-13 conforming to EN/IEC 60947-5-1
Electrical durability	100000 cycles, AC, 0.7 A at 220 V conforming to EN/IEC 60947-5-1 appendix C
Signalling type	Steady
Current consumption	10 mA
Service life	30000 h

The information provided in this documentation contains general descriptions and/or technical characteristics of the products of the company. This information is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

## Environment

Ambient air temperature for storage	-40...70 °C
Ambient air temperature for operation	-10...55 °C
IP degree of protection	IP65 conforming to IEC 60529
Standards	IEC 60947-1 CSA C22.2 No 14 JIS C 4520 IEC 60947-5-1 JIS C 852 UL 508
Product certifications	CURus CCC
Vibration resistance	1 mm (f= 10...55 Hz) conforming to IEC 60068-2-6
Shock resistance	10 gn (duration = 11 ms) for half sine wave acceleration conforming to IEC 60068-2-27

## Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	 <a href="#">REACH Declaration</a>
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)  <a href="#">EU RoHS Declaration</a>
Mercury free	Yes
China RoHS Regulation	 <a href="#">China RoHS Declaration</a>
RoHS exemption information	 <a href="#">Yes</a>
Environmental Disclosure	 <a href="#">Product Environmental Profile</a>
Circularity Profile	 <a href="#">End Of Life Information</a>
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

## Contractual warranty


Warranty	18 months
----------	-----------

---

Pushbutton

---

Rectangular Head

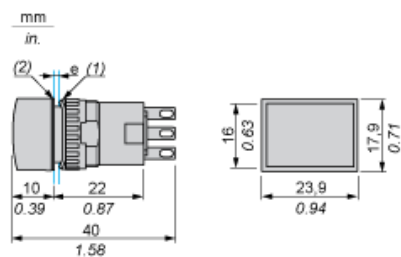

- (1) Anti-rotation plate (thickness: 0.6 mm / 0.02 in.)  
(2) Seal (thickness: 0.5 mm / 0.01 in.)  
e panel thickness: 0.5 mm (0.01 in.) ≤ e ≤ 6 mm (0.24 in.)

---

Panel Cut-Out and Mounting

---

Rectangular Head

