3-215309-0 ACTIVE

AMPMODU | AMPMODU HV-100/HV-190

TE Internal #: 3-215309-0

PCB Mount Receptacle, Vertical, Board-to-Board, 30 Position, 2.54


mm [.1 in] Centerline, Gold (Au), Through Hole - Solder,

AMPMODU HV-100/HV-190

View on TE.com >



Connectors > PCB Connectors > PCB Headers & Receptacles



PCB Connector Type: PCB Mount Receptacle

PCB Mount Orientation: Vertical
Connector System: Board-to-Board

Number of Positions: 30

Number of Rows: 2

Features

Product Type Features

PCB Connector Type	PCB Mount Receptacle
Connector System	Board-to-Board
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board
Connector Product Type	Connector Assembly

Configuration Features

Stackable	Yes
PCB Mount Orientation	Vertical
Number of Positions	30
Number of Rows	2

Body Features

Connector Profile	Standard
Primary Product Color	Green

Contact Features

Mating Pin Diameter	.63 mm[.024 in]
Mating Square Post Dimension	.63 mm[.024 in]
PCB Contact Termination Area Plating Material Thickness	2.5 μm[98.425 μin]
Contact Shape & Form	Square



Contact Protection Type	Closed Entry Housing
Contact Base Material	Phosphor Bronze
PCB Contact Termination Area Plating Material	Tin
Contact Mating Area Plating Material	Gold (Au)
Contact Type	Socket
Contact Current Rating (Max)	3 A
Termination Features	
Rectangular Termination Post & Tail Width	.69 mm[.027 in]
Rectangular Termination Post & Tail Thickness	.2 mm[.008 in]
Termination Post & Tail Length	3.1 mm[.122 in]
Termination Method to PCB	Through Hole - Solder
Mechanical Attachment	
PCB Mount Retention Type	Retention Solder Tails
PCB Mount Retention	With
Housing Features	
Mating Entry Location	Тор
Housing Material	Polyester - GF
Centerline (Pitch)	2.54 mm[.1 in]
Dimensions	
Row-to-Row Spacing	2.54 mm[.1 in]
PCB Thickness (Recommended)	1.6 mm
Connector Height	8.5 mm[.335 in]
Usage Conditions	
Operating Temperature Range	-65 – 125 °C[-67 – 221 °F][-85 – 257 °F]
Operation/Application	
Solder Process Feature	Board Standoff
Industry Standards	
UL Flammability Rating	UL 94V-0
Packaging Features	
Packaging Quantity	24
Packaging Method	Carton



Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Wave solder capable to 265°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts






Also in the Series | AMPMODU HV-100/HV-190





Customers Also Bought

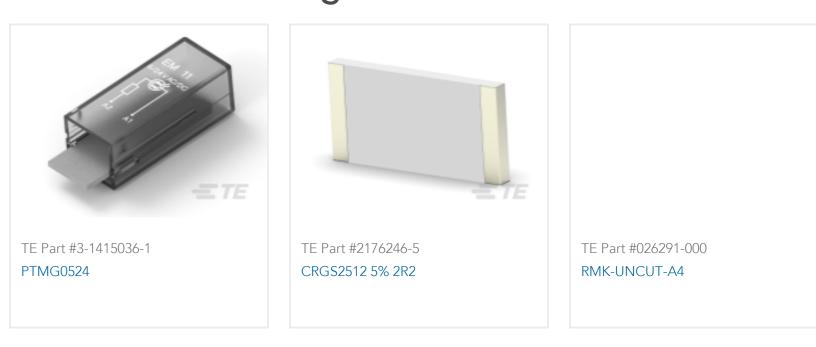

Documents

Product Drawings

2X30P HV100 REC CON. TE, 8.5MM

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_3-215309-0_F.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_3-215309-0_F.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_3-215309-0_F.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages

1773393_ AMPMODU_EUROPEAN_STANDARD_PRODUCTS

English