




Connectors > PCB Connectors > PCB Headers & Receptacles

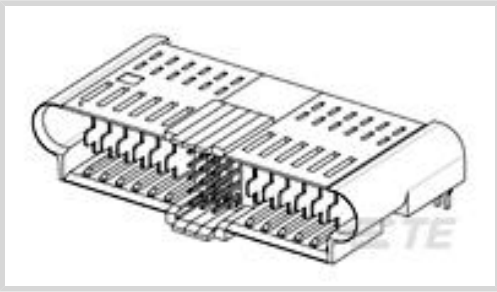

PCB Connector Type: **PCB Mount Plug**

PCB Mount Orientation: **Right Angle**

Connector System: **Board-to-Board**

Number of Positions: **41**

Number of Rows: **5**

Features

Product Type Features

Mixed & Hybrid Header	Yes
Connector Shape	Rectangular
PCB Connector Type	PCB Mount Plug
Connector System	Board-to-Board
Header Type	Fully Shrouded
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board
Connector Product Type	Connector Assembly

Configuration Features

Number of Loaded Positions	41
Mating & Unmating Configuration	Make First / Break Last
Number of Signal Positions	25
Number of Power Positions	16
Board-to-Board Configuration	Co-Planar
PCB Mount Orientation	Right Angle
Number of Positions	41
Number of Rows	5

Electrical Characteristics

Operating Voltage	60 VDC
-------------------	--------



Insulation Resistance	1000 MΩ
-----------------------	---------

Body Features

Connector Profile	Low
Primary Product Color	Black

Contact Features

Contact Underplating Material	Nickel
Contact Underplating Material Thickness	1.27 μm[50 μin]
Contact Mating Area Plating Material Thickness	.08 – .762 μm[3.15 – 30 μin]
PCB Contact Termination Area Plating Material Thickness	.5 μm[20 μin]
Contact Shape & Form	Single Beam
Contact Layout	Matrix
Contact Base Material	Copper Alloy, Phosphor Bronze
PCB Contact Termination Area Plating Material	Tin
Contact Mating Area Plating Material	Gold (Au)
Contact Type	Blade, Pin
Contact Current Rating (Max)	16 A

Termination Features

Termination Post & Tail Length	3.3 mm[.13 in]
Termination Method to PCB	Through Hole - Press-Fit, Through Hole - Solder

Mechanical Attachment

Mating Retention	Without
Mating Alignment Type	Passive Guide
PCB Mount Retention Type	Boardlock
PCB Mount Alignment Type	Boardlock
PCB Mount Retention	With
PCB Mount Alignment	With
Connector Mounting Type	Board Mount
Mating Alignment	With

Housing Features

Housing Material	LCP-GF (Liquid Crystal Polymer)
Centerline (Pitch)	2 mm, 2.75 mm[.079 in][.108 in]

Dimensions



Row-to-Row Spacing	1.5 mm, 2 mm[.06 in][.079 in]
Connector Width	26.5 mm[1.04 in]
PCB Thickness (Recommended)	1.4 – 2.62 mm[.055 – .103 in]
Connector Height	14 mm[.55 in]
Connector Length	68.96 mm[2.71 in]

Usage Conditions

Operating Temperature (Max)	125 °C[257 °F]
Operating Temperature Range	-40 – 125 °C[-40 – 257 °F]

Operation/Application

Circuit Application	Power & Signal
---------------------	----------------

Industry Standards

Compatible With Agency/Standards Products	CSA
UL Rating	Recognized
Compatible With Approved Standards Products	UL E28476
Glow Wire Rating	Standard Part - Not Glow Wire
UL Flammability Rating	UL 94V-0

Packaging Features

Packaging Quantity	24
Packaging Method	Tray

Product Compliance

For compliance documentation, visit the product page on TE.com>








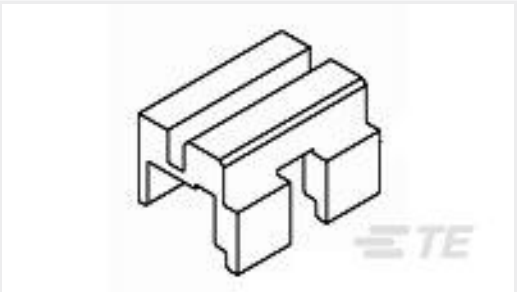


EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Wave solder capable to 265°C



Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Customers Also Bought

 <p>TE Part #YDTS26W17-35PNC001 PLUG ASSY</p>	 <p>TE Part #7-1393765-7 R10-E1P6-V430=R10</p>	 <p>TE Part #3-2176058-4 RLP73K 3A R24 5% 2K RL</p>	 <p>TE Part #3-1393766-3 R10-E1Y2-J1.0K=R10</p>
 <p>TE Part #532436-3 HDI PIN ASSY 4 ROW 128 POS</p>	 <p>TE Part #532903-3 HDI RECP ASSY 4 ROW 128 POS</p>	 <p>TE Part #YDTS20W21-35PNC001 RECP ASSY</p>	 <p>TE Part #122559-1 SEATING TOOL 2MM HM 7 ROW</p>
 <p>TE Part #90753-1 SEATING TOOL ASSY H.M. 154 PIN</p>	 <p>TE Part #CW4361-000 R85049/88-13N02</p>		

Documents

Product Drawings  
AssyminipakHDL8p25s8pRAplugbrd  
English

CAD Files  
3D PDF



3D

Customer View Model

[ENG\\_CVM\\_CVM\\_2-1926720-5\\_C.3d\\_igs.zip](#)

English

Customer View Model

[ENG\\_CVM\\_CVM\\_2-1926720-5\\_C.3d\\_stp.zip](#)

English

Customer View Model

[ENG\\_CVM\\_CVM\\_2-1926720-5\\_C.2d\\_dxf.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[POWER\\_CONNECTORS\\_CATALOG\\_SEC01\\_BOARD\\_TO\\_BOARD](#)

English

[2\\_PIECE\\_POWER\\_CONNECTORS\\_qrg\\_4-1773458-1](#)

English

[8-1773448-5 MINIPAK HDL Connectors Datasheet](#)

English

[8-1773448-5 MINIPAK HDL Connectors Datasheet](#)

English

Product Specifications

[Application Specification](#)

English