

TFT DISPLAY SPECIFICATION



RAYSTAR

RAYSTAR Optronics, Inc.
曜凌光電股份有限公司



曜凌光電股份有限公司 Raystar Optronics, Inc.

T: +886-4-2565-0761 | F: +886-4-2565-0760

salescontact@raystar-optronics.com | www.raystar-optronics.com

RFC350X-EYW-DBN

General Specifications


- Size: 3.5 inch
- Dot Matrix: 320 x RGB x 240(TFT) dots
- Module dimension: 93.5 x 66.44 x 7.67 mm
- Active area: 70.08 x 52.56 mm
- Dot pitch: 0.073 x 0.219 mm
- LCD type: TFT, Normally Black, Transmissive
- Viewing Angle: 80/80/80/80
- Aspect Ratio: 4:3
- Backlight Type: LED, Normally White
- Controller IC: SSD1963
- Interface: Digital 8080 family MPU 8bit/16bit
- Touch Panel: Without Touch Panel
- Surface: Glare

Interface

LCM PIN Definition (CON2)

Pin	Symbol	Function
1	GND	System ground pin of the IC.Connect to system ground.
2	VDD	Power Supply : +3.3V
3	BL_E	Backlight control signal , H: On \ L: Off
4	D/C	Data/Command select
5	WR	Write strobe signal
6	RD	Read strobe signal
7	DB0	Data bus
8	DB1	Data bus
9	DB2	Data bus
10	DB3	Data bus
11	DB4	Data bus
12	DB5	Data bus
13	DB6	Data bus
14	DB7	Data bus
15	DB8	Data bus (When select 8bits Mode, this pin is NC)
16	DB9	Data bus (When select 8bits Mode, this pin is NC)
17	DB10	Data bus (When select 8bits Mode, this pin is NC)
18	DB11	Data bus (When select 8bits Mode, this pin is NC)
19	DB12	Data bus (When select 8bits Mode, this pin is NC)
20	DB13	Data bus (When select 8bits Mode, this pin is NC)
21	DB14	Data bus (When select 8bits Mode, this pin is NC)
22	DB15	Data bus (When select 8bits Mode, this pin is NC)
23-24	NC	No connect
25	CS	Chip select
26	RESET	Hardware reset
27-32	NC	No connect
33-34	VLED-	VLED- for B/L LED inverter (GND)
35-36	VLED+	VLED+ for B/L LED inverter (+3.3V)

Contour Drawing

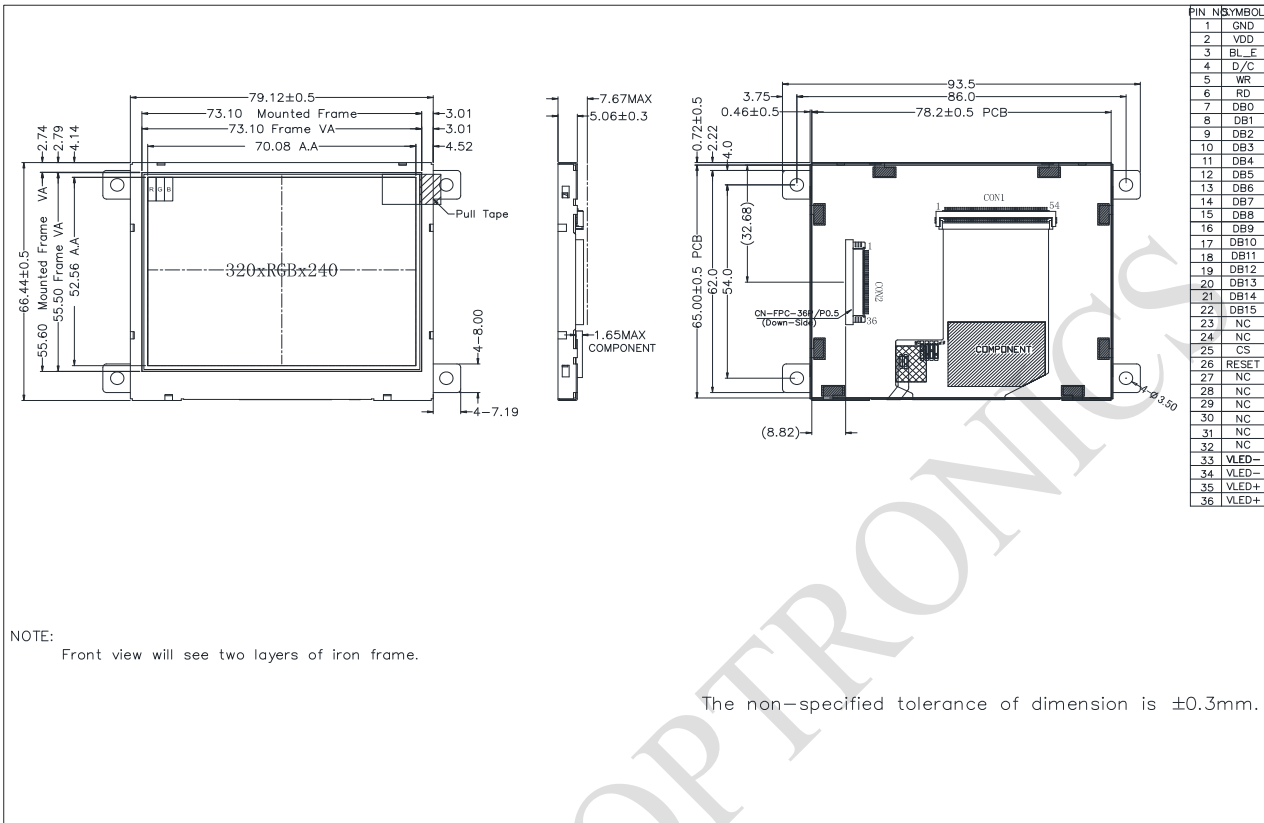

Absolute Maximum Ratings

Item	Symbol	Min	Typ	Max	Unit
Operating Temperature	TOP	-20	—	+70	°C
Storage Temperature	TST	-30	—	+80	°C

Electrical Characteristics

Operating Conditions (CON2.Pin1=GND, Pin2=VDD)

Item	Symbol	Min	Typ	Max	Unit
Supply Voltage For LCM	VDD	3.0	3.1	3.3	V
Supply Current For LCM	IDD	-	50	75	mA

Backlight Driving Conditions (CON2.Pin33,34=VLED-, Pin35,36=VLED+)

Parameter	Symbol	Min.	Typ.	Max.	Unit
Operation Current For LED Driver	VLED=3.3V	-	150	225	mA
Power Consumption	VLED=3.3V	-	495	742.5	mW
Supply Voltage For LED Driver	VLED+	3.3	-	5	V
LED Life Time		-	50,000	-	Hr