



CONTACTOR, SIZE 2,
 2-POLE DC-3 AND 5,RATD.OPERAT.CURR.32A
 AUXILIARY CONTACTS 22 (2NO+2NC) AC OPERATION
 AC 110V 50HZ/AC 132V 60HZ

General details:

Size of the contactor		2
Number of poles		2
Item designation / according to DIN 40719 extendable after IEC 204-2 / according to IEC 750		K
Item designation / according to DIN EN 61346-2		Q
Protection class IP		IP00
Ambient temperature <ul style="list-style-type: none"> during operating 	°C	-25 ... +55

Control circuit:

type of voltage		AC
Control supply voltage <ul style="list-style-type: none"> at 50 Hz / at AC / rated value / minimum at 50 Hz / at AC / rated value / maximum at 60 Hz / at AC / rated value / minimum at 60 Hz / at AC / rated value / maximum 	V	110 110 132 132

Main circuit:

Number of NO contacts / for main contacts		2
Number of NC contacts / for main contacts		0

Operating current		
• at DC-3 / at DC-5 / at 440 V / rated value	A	29
• at DC-3 / at DC-5 / at 220 V / rated value	A	32
• at DC-3 / at DC-5 / at 600 V / rated value	A	21
• at DC-3 / at DC-5 / at 750 V / rated value	A	7.5
Service power		
• at DC-3 / at DC-5 / at 110 V / rated value	kW	2.5
• at DC-3 / at DC-5 / at 220 V / rated value	kW	5
• at DC-3 / at DC-5 / at 440 V / rated value	kW	9
• at DC-3 / at DC-5 / at 600 V / rated value	kW	9
• at DC-3 / at DC-5 / at 750 V / rated value	kW	4

Auxiliary circuit:

Identification number and letter for switching elements		22
Number of NO contacts / for auxiliary contacts		2
Number of NC contacts / for auxiliary contacts		2
Number of change-over switches / for auxiliary contacts		0






Connection type:

Design of the electrical connection / for main current circuit		screw-type terminals
Design of the electrical connection / for auxiliary and control current circuit		screw-type terminals

Mechanical design:

Type of mounting		screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 50022
Type of fixing/fixation / series installation		Yes
Width	mm	70
Height	mm	85
Depth	mm	104

Certificates/approvals:

General Product Approval				Test Certificates	Shipping Approval
				Special Test Certificate	
CCC	CSA	GOST	UL		RMRS
other					
Confirmation	Declaration of Conformity	other			

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

Cax online generator:


<http://www.siemens.com/cax>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3TC4417-0BF0/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3TC4417-0BF0

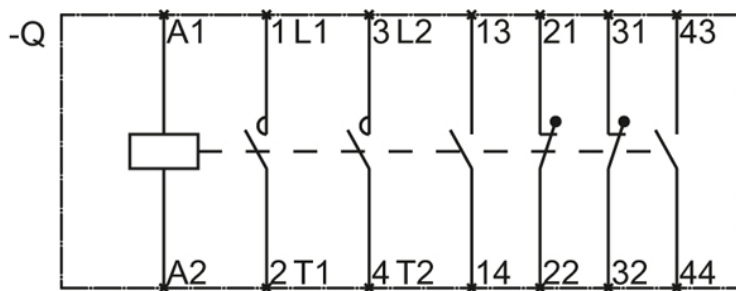

last change:

Mar 27, 2012